STONESOURCE





WHITE Natural 24"x24" Rectified + WHITE, SAND & GREY Hexagon Natural 8.5"x10" Rectified











DARK GREY Natural 24"x24" Rectified












COLOR BODY PORCELAIN STONEWARE - RECTIFIED MONOCALIBER




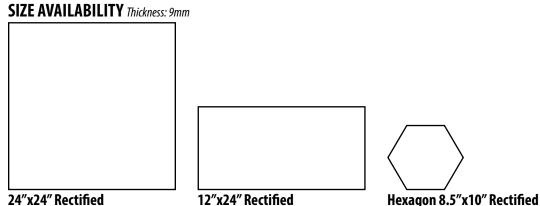

Finish: Natural Available in all colors.

Finish: Natural

Available in all colors.






COLOR BODY PORCELAIN STONEWARE - RECTIFIED MONOCALIBER

DECORS


Mosaic A 12"x12" (2"x2" Pcs.) Rectified Thickness: 9mm - Finish: Natural

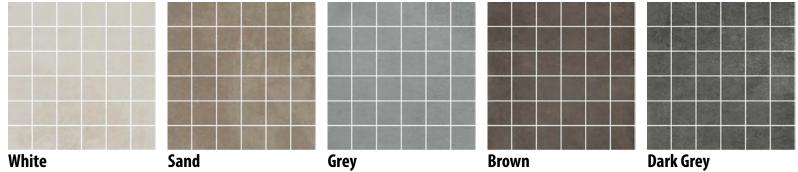

COLOR BODY PORCELAIN STONEWARE - RECTIFIED MONOCALIBER

FEATURES AND BENEFITS


























RECOMMENDED USE

Porcelain Solutions U.S. Concrete is recommended for indoor floors, walls, countertops, and outdoor walls in commercial and residential application. It is not recommended for outdoor application or horizontal exterior surfaces. A offset no greater than 30% is recommended, if a staggered pattern is required for tiles of 20" inches or longer.

CARE AND MAINTENANCE

Do not apply any wax or sealer to the product after installation. Regular cleaning is the best way to keep these tiles looking good. Use clean, hot water (add household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth to prevent water spots.

COLOR BODY PORCELAIN STONEWARE - RECTIFIED MONOCALIBER

TECHNICAL CHARACTERISTICS NORTH AMERICAN STANDARD A137.1

TECHNICAL CHARACTERISTICS NORTH AMERICAN STANDARD AIST.			
PHYSICAL PROPERTIES	TEST ASTM	NORTH AMERICAN STANDARD A 137.1	RESULTS
D.C.O.F.	ANSI A 137.1-2012 BOT 3000	≥ 0.42 Wet	Natural: ≥ 0.42 Wet
Water Absorption	ASTM C373	≤ 0.5%	Compliant
Resistance to Freeze/ Thaw Cycling	ASTM C1026	As Reported	Resistant
Warpage (Edge)	ASTM C485	Warpage ± 0.4% or ± 0.05 in	Compliant
Warpage (Diagonal)	ASTM C485	Warpage ± 0.4% or ± 0.07 in	Compliant
Wedging	ASTM C502	± 0.25% or ± 0.03 in	Compliant
Chemical Resistance	ASTM C650	As Reported	Unaffected
Breaking Strength	ASTM C648	250 lbf or greater	Compliant
Thickness	ASTM C499	Range: 0.04 in	Compliant

- Be sure to use tiles belonging to the same caliber.
- Tiles can be slippery when wet. We recommend to make sure that the surface is always dry.
- Information provided can be subject to change.

The color of the tiles printed in this catalog may differ from actual tiles. Tile color reproductions in this brochure are representative only. Slight tone and shade variations are inherent in porcelain tiles. Before selecting a color, we recommend that you contact a CTL sales representative before selecting.

Color Body Porcelain Stoneware - Rectified Monocaliber







ATLANTA 1465 CHATTAHOOCHEE AVE NW 311 SUMMER ST. SUITE 400 & 450 ATLANTA, GA 30318 770.336.6512

BOSTON, MA 02210

CHICAGO 205 WEST WACKER DR. CHICAGO, IL 60606 312.335.9900

DALLAS 1825 MARKET CENTER BLVD. DALLAS, TX 75207

EAST HAMPTON 34 PARK PLACE EAST HAMPTON, NY 11937 631.324.7497

HOUSTON 4900 WOODWAY DR. HOUSTON, TX 77056 832.608.6370

LOS ANGELES 5429 MCCONNELL AVE. LOS ANGELES, CA 90066

NASHVILLE 2930 SIDCO DR. NASHVILLE, TN 37204 615.244.6448

NEW JERSEY 350 STARKE RD. CARLSTADT, NJ 07072 201.549.7400

NEW YORK 215 PARK AVE. SOUTH NEW YORK, NY 10003 212.979.6400

WASHINGTON, DC 1129 20TH ST. NW WASHINGTON, DC 20036 202.265.5900