

PAVIMENTI
OAK WOOD

STONESOURCE



FLOOR
PECAN Matte 9"x36" Rectified



FLOOR
NATURAL Matte 9"x36" Rectified



FLOOR
MAHOGANY Matte 9"x36" Rectified

FLOOR
WALNUT Matte 9"x36" Rectified



FLOOR & WALL
WHITE Matte 9"x36" Rectified



FLOOR
BIANCO Matte 9"x36" Rectified



FLOOR
NERO Matte 9"x36" Rectified



FLOOR
BIANCO Matte 4"x24" Rectified



FLOOR
NERO Matte 4"x24" Rectified

PAVIMENTI OAK WOOD

FINE PORCELAIN STONEWARE

COLOR AVAILABILITY



WHITE



NATURAL




PECAN



GREY



WALNUT

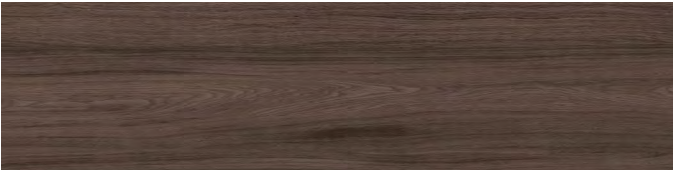

MAHOGANY




BIANCO



NERO

SIZE AVAILABILITY



9”x36” Rectified


Thickness: 10mm
Finish: Matte
Available in all colors



4”x24” Rectified

Thickness: 10mm
Finish: Matte
Available in all colors

SPECIAL PIECES



Bullnose 3”x18”

Finish: Matte
Available in all colors

V3 SHADE VARIATION

TECHNICAL SPECIFICATIONS

PORCELAIN STONEWARE UNI EN 14411 (ISO 13006) Bla (APPENDIX G)

TECHNICAL FEATURE	TEST METHODS	REQUIREMENTS IN ACCORDANCE TO THE STANDARDS	AVERAGE VALUE
			MATTE
Water absorption	ISO 10545-3	≤ 0.5%	0.2%
Flexural resistance (R)	ISO 10545-4	Min. 35 N/mm²	Compliant
Breaking strength		Min. 1300 N	Compliant
Shock resistance	ISO 10545-05	Suggested Minimum: e > 0.55	Compliant
Deep abrasion resistance	ISO 10545-6	Max 175 mm³	Compliant
Linear expansion thermic coefficient (α)	ISO 10545-8	Available method	≤ 7 x 10 ⁻⁶ °C ⁻¹
Resistance to sudden temperature changes	ISO 10545-9	Available method	Resistant
Frost resistance	ISO 10545-12	As Reported	Compliant
Chemical resistance (Domestic Chemical Products)	ISO 10545-13	UB / GB	Compliant
Chemical resistance (Acids and Alkalis)	ISO 10545-13	As Reported	ULA
Stain resistance	ISO 10545-14	Minimum: Class 3	Class 5
Slip Values			
D.C.O.F.	ANSI A137.1 2012 BOT 3000	> 0.42 Wet	> 0.42 Wet

NOTES:

