

tek vue

application guide

05.27.2024

teknion



what is tek vue


# what is tek vue

## what is tek vue

**Tek Vue is a value oriented glass office front system designed with simplicity in mind.**

Tek Vue consists of a thin profile center glass wall and universal door program. The system can be integrated with conventional building construction as well as existing Teknion wall programs.

### environments and applications:

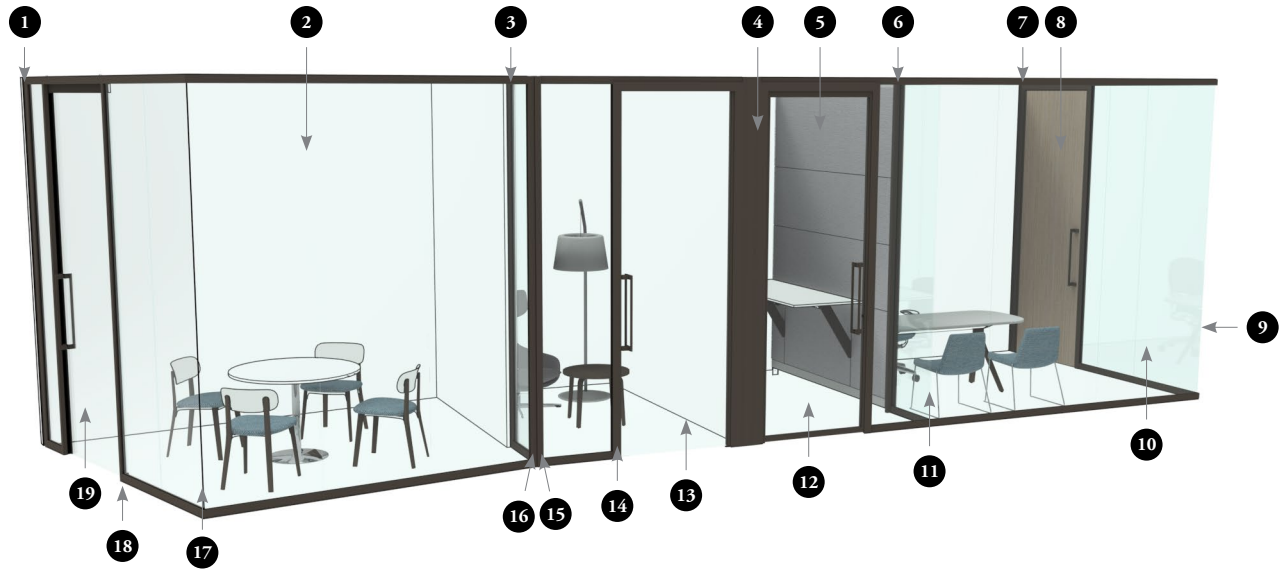

- 1 Articulating Wall Start
- 2 Drywall Spine and demising (shown)
- 3 Wall Start
- 4 Drywall Fly-By Transition
- 5 Altos Landscape demising (shown)
- 6 Altos Inline Transition
- 7 Door Start
- 8 Solid Pivot Door
- 9 90° Glass Corner
- 10 Inline Glass (Off Module)
- 11 Three-Way Glass Corner (Off Module)
- 12 Framed Pivot Door (Single leaf shown)
- 13 Frameless Pivot Door
- 14 Universal Pivot Door Frame
- 15 Glass Corner Transition
- 16 Articulating Wall Transition
- 17 Clear Plastic Variable Angle Connector
- 18 Universal Sliding Door Frame
- 19 Frameless Sliding Door Leaf (interior mounted)




## wall program – core concepts

The following describes the core concepts to consider when planning and specifying the Tek Vue wall program.

Tek Vue wall program consists of the following discrete elements:

- Horizontal Frames
- Verticals
- Glass Fascias

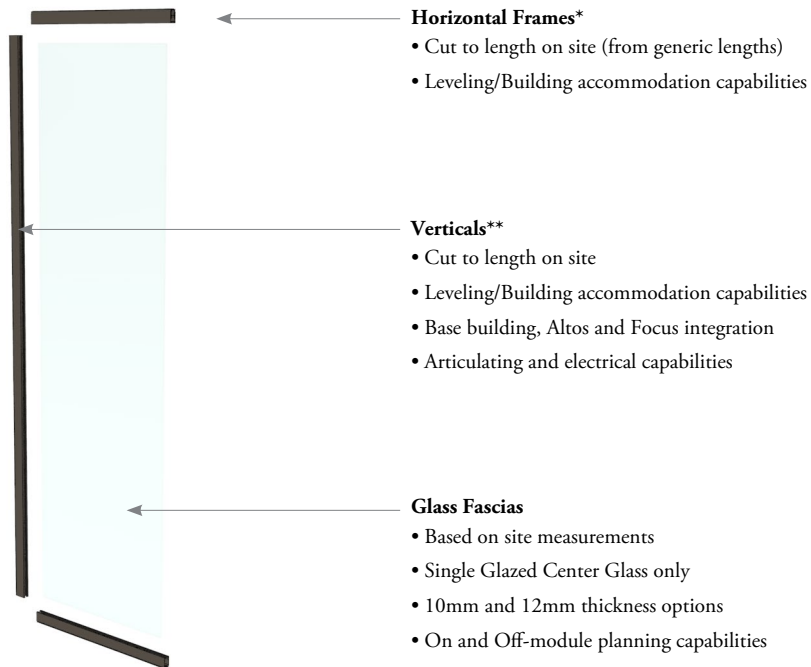

NOTE:


\* Horizontal Frames include base and ceiling frames

\*\* Verticals include wall starts, door starts and wall transitions

# wall program – planning considerations

The following describes the planning considerations for the wall program.

The diagrams below explain the building accommodation range of the Wall Program in relation to the nominal floor to ceiling height.

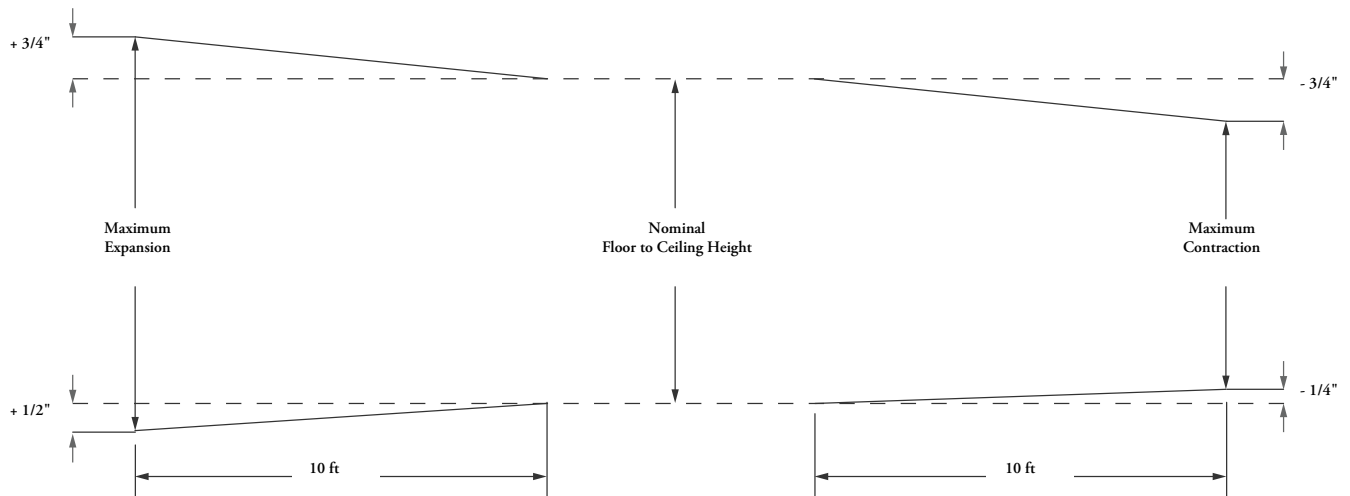


## Maximum Expansion - Floor to Ceiling

Finished floor to ceiling height cannot expand more than 1-1/4" over 10 ft in one wall run (+3/4" in ceiling, + 1/2" in floor).

## Maximum Contraction - Floor to Ceiling

Finished floor to ceiling height cannot contract more than 1" over 10ft in one wall run (-3/4" in ceiling, -1/4" in floor).

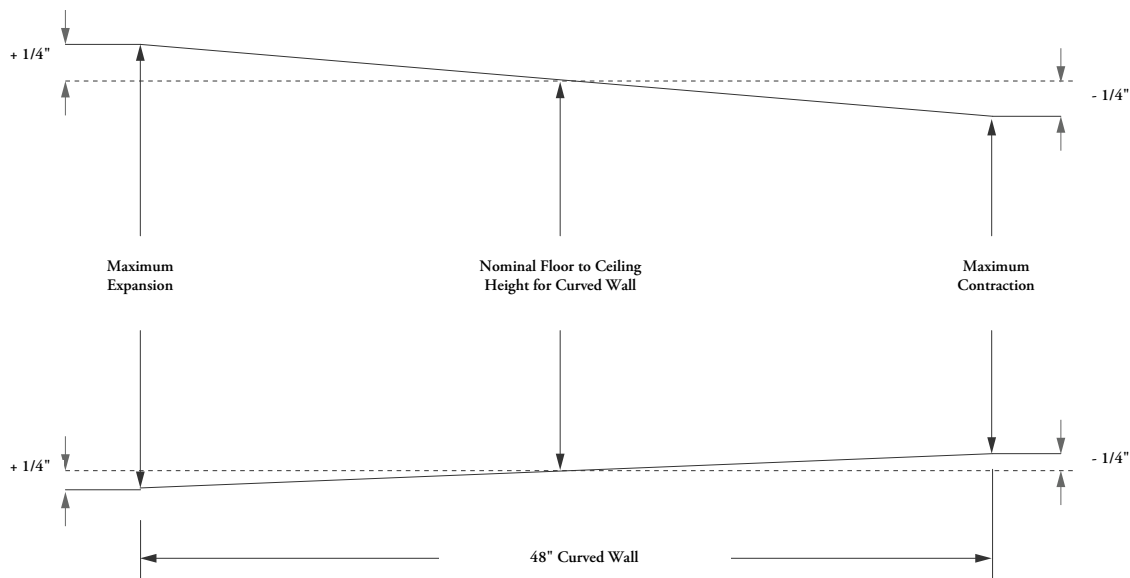

## Maximum Expansion - Floor to Ceiling


Finished floor to ceiling height cannot expand more than 3/4" over the curved wall (+1/2" in ceiling, + 1/4" in floor).

## Maximum Contraction - Floor to Ceiling

Finished floor to ceiling height cannot contract more than 3/4" over the curved wall (-1/2" in ceiling, -1/4" in floor).

## wall program – planning considerations (continued)

The diagram below explains the building accommodation range of the Wall Program in relation to vertical drywall.

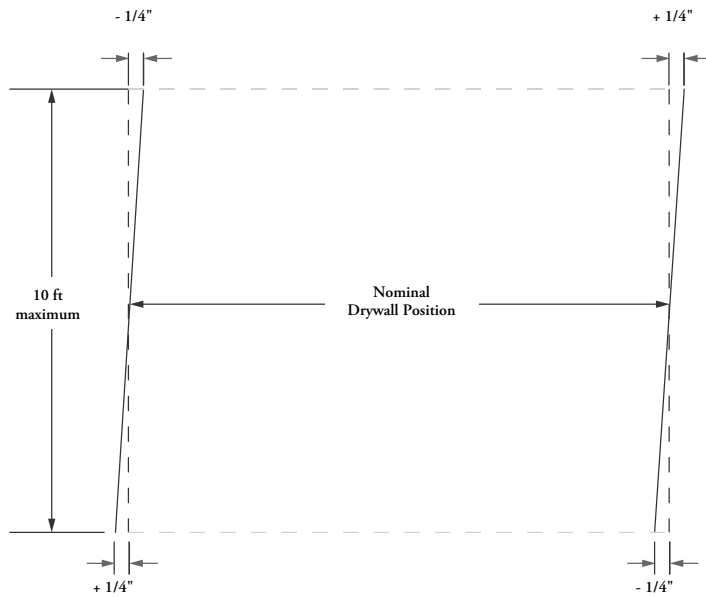

### Maximum Deviation - Vertical Drywall


Each finished drywall surface cannot deviate more than  $\pm 1/4$ " from nominal position (max 10 ft height).

# door program – core concepts

The following describes the core concepts to consider when planning and specifying the Tek Vue Pivot and Sliding door programs.

The Tek Vue door programs consists of the following discrete elements:

- Jamb Connections
- Universal Door Frames
- Door Leafs
- Egress Hardware

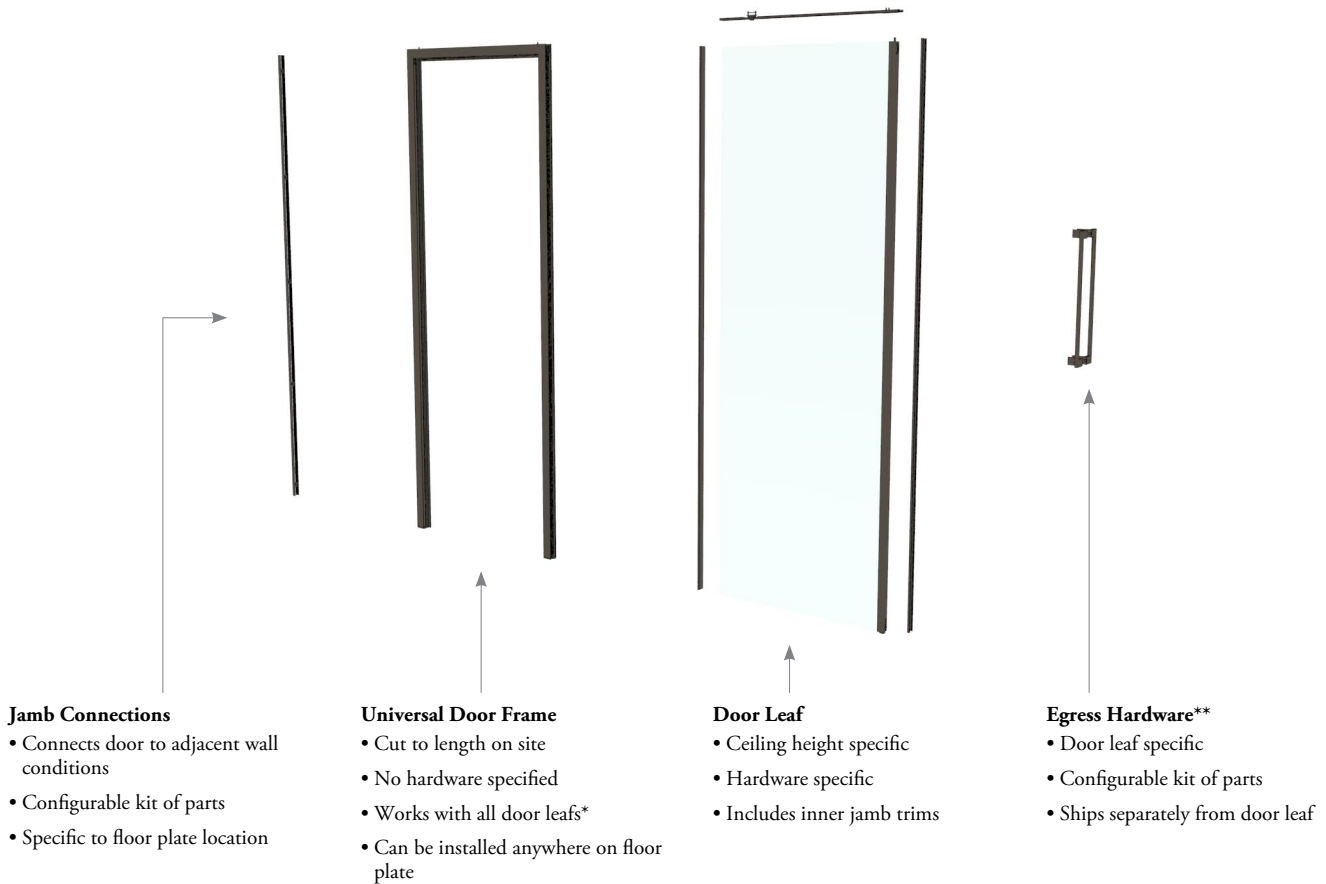

NOTE:


\* Only within same door type (ie. pivot or sliding)

\*\* Egress hardware = Handles, Levers, Pulls and Patch Covers

# door program – planning considerations


The following describes the planning considerations for the pivot and sliding door programs.

The diagram below explains the building accommodation range of Pivot Door Program to the nominal floor to ceiling height.

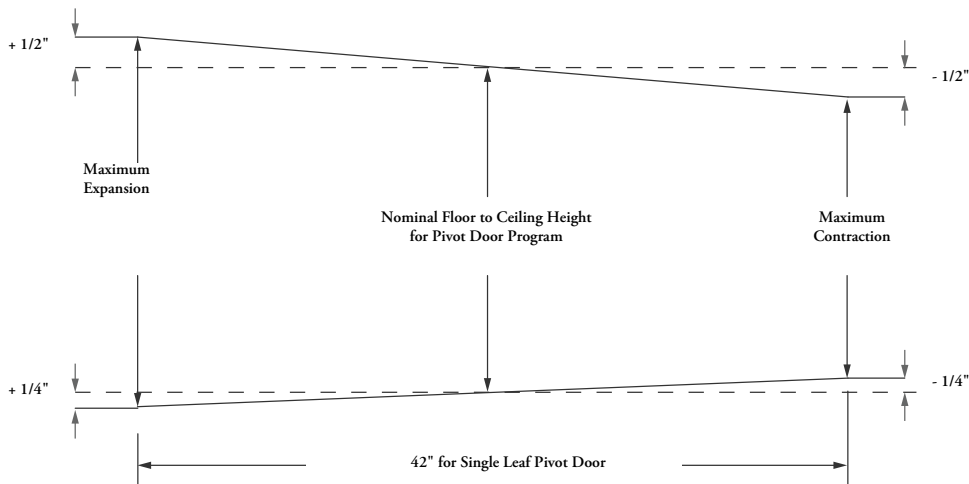

- Maximum Expansion - Floor to Ceiling**  
Finished floor to ceiling height cannot expand more than 3/4" over span of a pivot door (+1/2" in ceiling, + 1/4" in floor).
- Maximum Contraction - Floor to Ceiling**  
Finished floor to ceiling height cannot contract more than 3/4" over span of a pivot door (-1/2" in ceiling, -1/4" in floor).

The diagram below explains the building accommodation range of Sliding Door Program to the nominal floor to ceiling height.

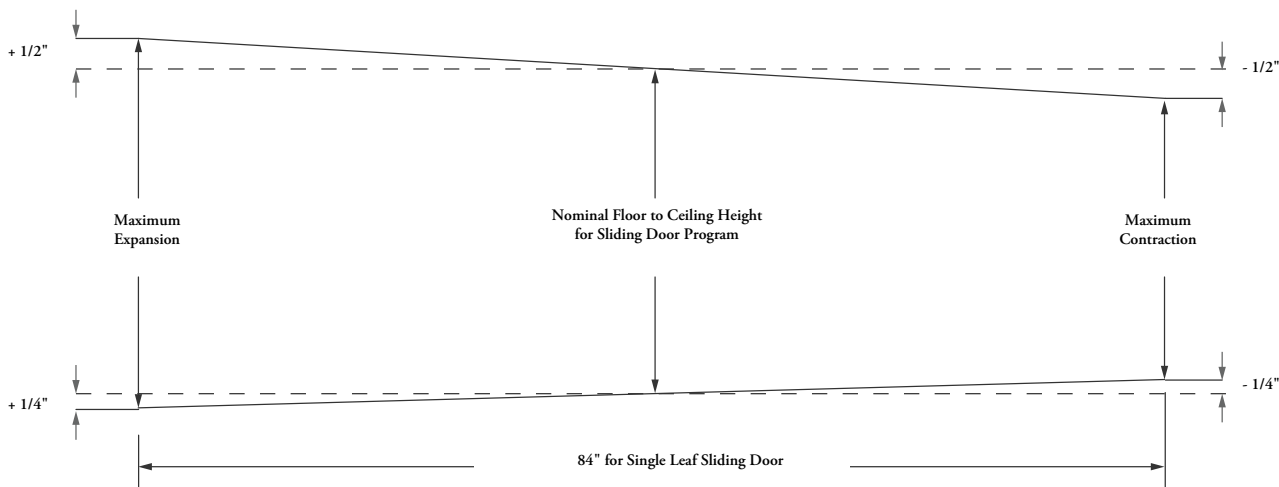


- Maximum Expansion - Floor to Ceiling**  
Finished floor to ceiling height cannot expand more than 3/4" over span of a Sliding door (+1/2" in ceiling, + 1/4" in floor).
- Maximum Contraction - Floor to Ceiling**  
Finished floor to ceiling height cannot contract more than 3/4" over span of a Sliding door (-1/2" in ceiling, -1/4" in floor).



# wall & door program – planning considerations

The rules and diagram below explain how the Wall Program and Door Program can be planned in relation to each other.

- A wall run continues through any door module. Any door module within the wall run has the same nominal height
- There can only be one glass fascia height per continuous wall run
- A continuous wall run can only be broken by a vertical (transition, wall start, etc.)
- Separate wall runs can have different nominal heights, if required

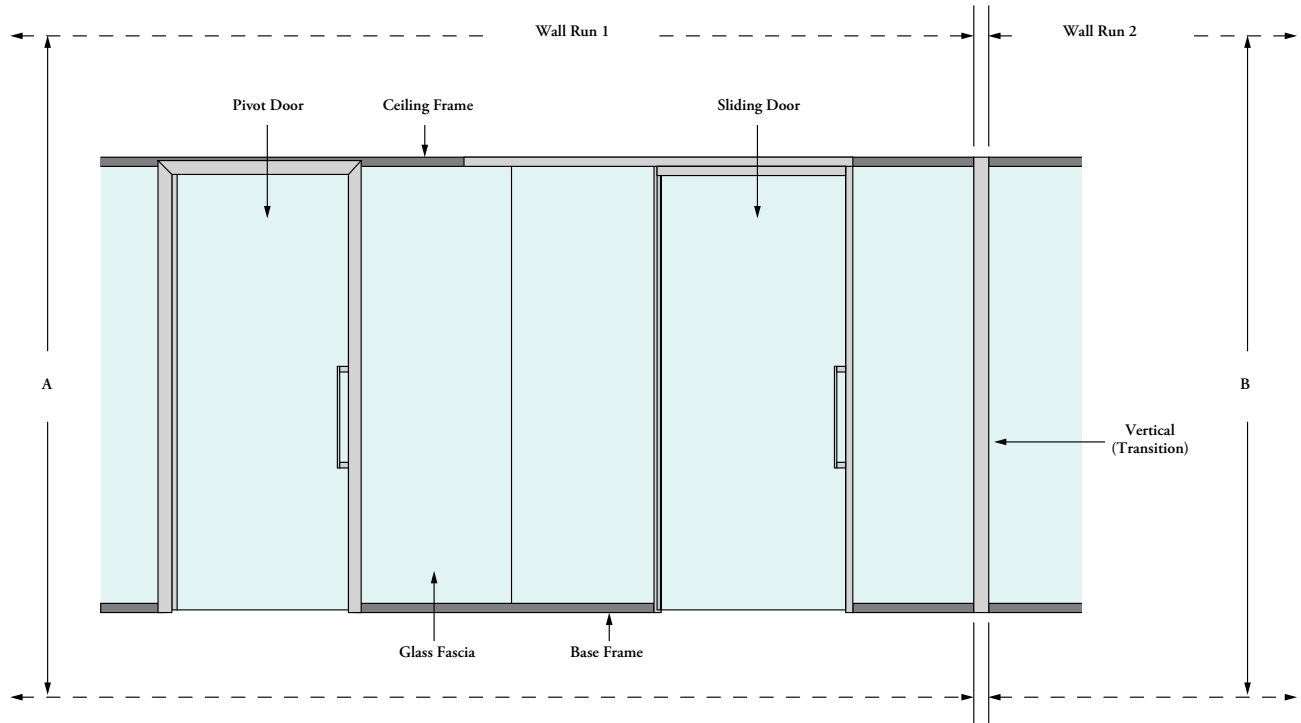

A = Nominal Height #1

B = Nominal Height #2

application guide


# application guide

PRODUCT MAPS . . . . .	14
HORIZONTAL FRAME OVERVIEW . . . . .	22
HORIZONTAL FRAME BASICS . . . . .	23
PLANNING WITH HORIZONTAL FRAMES . . . . .	24
GLASS FASCIA BASICS . . . . .	27
PLANNING WITH GLASS FASCIAS . . . . .	28
GLASS CONNECTOR BASICS . . . . .	29
PLANNING WITH GLASS CONNECTOR . . . . .	30
WALL & DOOR START BASICS . . . . .	31
PLANNING WITH WALL & DOOR STARTS . . . . .	32
GLASS & DRYWALL TRANSITION BASICS . . . . .	33
PLANNING WITH GLASS CORNER TRANSITIONS . . . . .	34
PLANNING WITH DRYWALL FLY-BY TRANSITIONS . . . . .	35
ALTOS & FOCUS TRANSITION BASICS . . . . .	36
PLANNING WITH ALTOS TRANSITIONS . . . . .	37
PLANNING WITH FOCUS TRANSITIONS . . . . .	38
WALL END TRANSITION BASICS . . . . .	39
PLANNING WITH WALL END TRANSITIONS . . . . .	42
ARTICULATING & ELECTRICAL TRANSITION BASICS . . . . .	41
PLANNING WITH ARTICULATING TRANSITIONS . . . . .	42
PLANNING WITH ELECTRICAL TRANSITIONS . . . . .	43
PIVOT DOOR PROGRAM BASICS . . . . .	45
PLANNING WITH PIVOT DOOR PROGRAMS . . . . .	49
PLANNING WITH PIVOT DOOR JAMB CONNECTIONS . . . . .	51
PLANNING OPENING RANGE WITH PIVOT DOORS . . . . .	52
SLIDING DOOR PROGRAM BASICS . . . . .	53
PLANNING WITH SLIDING DOOR PROGRAMS . . . . .	55
PLANNING WITH SLIDING DOOR JAMB CONNECTIONS . . . . .	57
PLANNING WITH INTERIOR MOUNTED SLIDING DOOR RAILS . . . . .	58
PLANNING WITH EXTERIOR MOUNTED SLIDING DOOR RAILS . . . . .	60
PLANNING WITH SLIDING DOOR RAILS . . . . .	62
HARDWARE BASICS . . . . .	63
PLANNING WITH HARDWARE . . . . .	64
ACCESSORIES & ELECTRICS BASICS . . . . .	65

# horizontal frames


F V F C Horizontal Ceiling Frame

Xpress




F V F B Horizontal Base Frame

Xpress




F V C C F Curved Ceiling Frame



---

F V C B F Curved Base Frame



glass fascias & connectors

**F V G L A** Glass Fascia – 10mm Thickness  
**Xpress**



**F V G L B** Glass Fascia – 12mm Thickness  
**Xpress**




**F V G L X A** Curved Glass Fascia – 10mm Thickness  





**F V G L X B** Curved Glass Fascia – 12mm Thickness  





**F V G I P** Inline Clear Plastic Glass Connector  
**Xpress**




**F V G T C** Tape Glass Connector  
**Xpress**




**F V G V P** Variable Angle Clear Plastic Glass Connector  
**Xpress**



**F V G N P** 90° Clear Plastic Glass Connector  
**Xpress**




**F V G T P** Three-Way Clear Plastic Glass Connector  
**Xpress**






wall & door starts


F V S W S Wall Start  
Xpress



F V S W A Articulating Wall Start  
Xpress




F V S D S Door Start  
Xpress



---


F V S D A Articulating Door Start  
Xpress



## wall transitions


**F V T G C Glass Corner Transition**

Xpress




**F V T D F Drywall Fly-By Transition**

Xpress




**F V T A I Altos Inline Transition**

Xpress

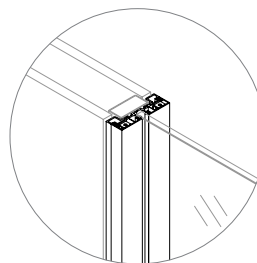


**F V T A C Altos Corner Transition**

Xpress




**F V T F C Focus Corner Transition**

Xpress




**F V T W E Wall End**

Xpress




**F V T W A Articulating Wall Transition**

Xpress




**F V T D A Articulating Door Transition**

Xpress



**F V T E P Electrical Side Post**



## doors

**F V S G S L** Frameless Sliding Door  
Leaf Single

**Xpress**




**F V S F S L** Framed Sliding Door  
Leaf Single

**Xpress**



**F V D F S L** Framed Sliding Door  
Leaf Double

**Xpress**

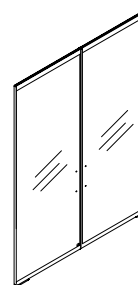

**F V S G P L** Frameless Pivot Door  
Leaf Single

**Xpress**




**F V S F P L** Framed Pivot Door  
Leaf Single

**Xpress**



**F V D F P L** Framed Pivot Door  
Leaf Double


**Xpress**

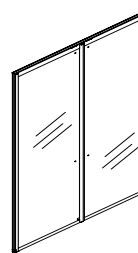

**F V S S P L** Solid Pivot Door Leaf  
Single



**F V D S P L** Solid Pivot Door Leaf  
Double

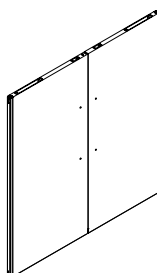


**F V S U P J** Universal Pivot Door  
Frame Single

**Xpress**




**F V D U P J** Universal Pivot Door  
Frame Double

**Xpress**




**F V S U S J** Universal Sliding Door  
Frame Single

**Xpress**

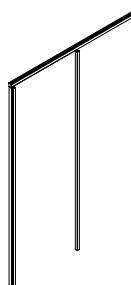

**F V D U S J** Universal Sliding Door  
Frame Double


**Xpress**

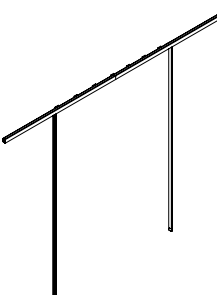

## doors (continued)


**F V D J P C** Pivot Door Jamb  
Connection

**Xpress**

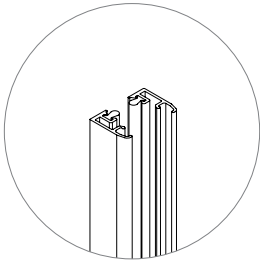


**F V D J B C** Sliding Door Jamb  
Connection

**Xpress**

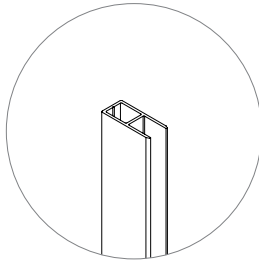


**F V D S C P** Handle Ceiling Pull

**Xpress**

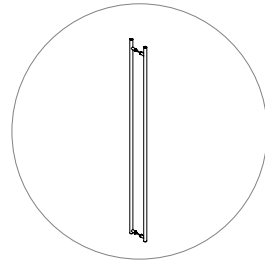


**F V D S F P** Door Handle Floor Pull




**F V D H L P** Door Handle  
Linear Pull

**Xpress**




**F V D H S X** Door Handle Schlage  
ALX Series

**Xpress**




accessories & electrics


F V A S K   Splice Kit  
Xpress




F V A C S   Ceiling Support  
Xpress




F V A L S   Low Profile Light Switch  
Xpress




F V A R M   Low Profile Receptacle  
Module



F V A A K   Glass Applicator Kit  
Xpress




F V A F F   Frame Cut Fixture  
Xpress

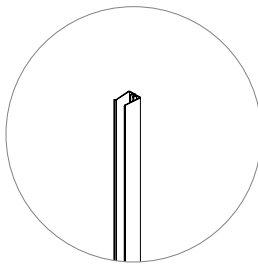

F V K K   Control Key  
Xpress



F V C W T   Curved Wall Template  
Xpress

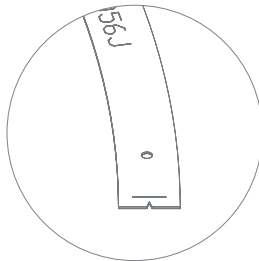







# horizontal frame overview

The following diagram describes the features and details of the ceiling and base frame components.


## straight ceiling frame

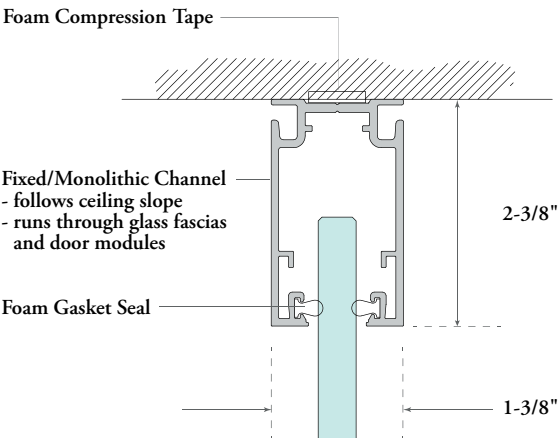


## curved ceiling frame

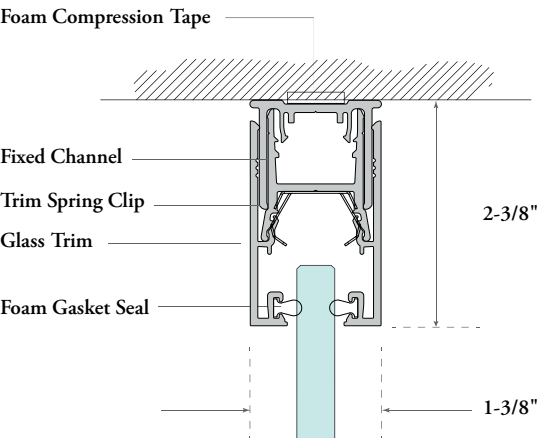

## straight base frame

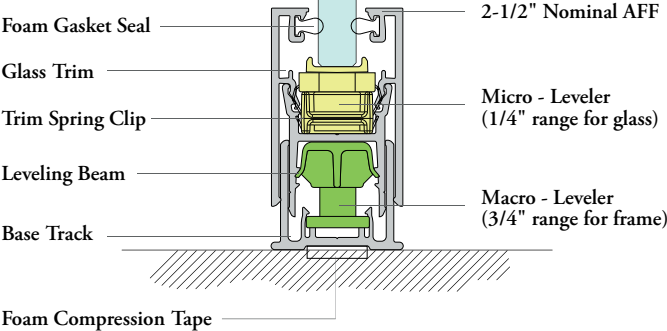


## curved base frame

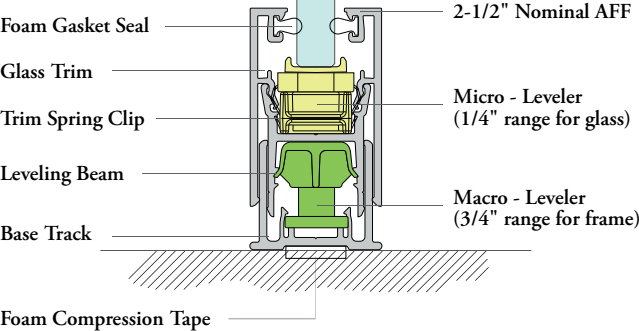

# horizontal frame basics

Tek Vue horizontal frames consist of two discrete elements, Ceiling Frame and Base Frame.

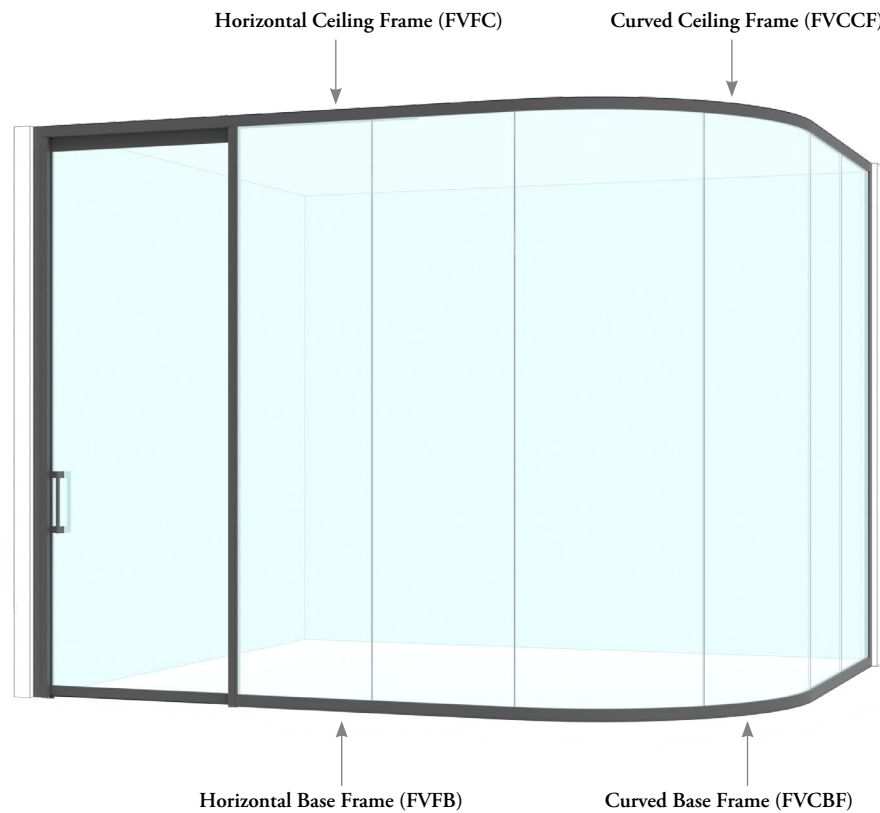


## Straight Horizontal Frame

- Glass Thickness: 10 or 12mm
- Lengths: 36", 84", 121"
- Finishes: Clear Anodized or Painted
- Cut to size on site


## Curved Horizontal Frame

- Glass Thickness: 10 or 12mm
- Angle: 90°
- Radius: 15" to 48"
- Finishes: Painted




## Horizontal Ceiling Frame (FVFC)

- Fixed ceiling frame for single center glass




## Horizontal Base Frame (FVFB)

- Adjustable base frame for single center glass



## Curved Ceiling Frame (FVCCF)

- Fixed ceiling frame for single center glass




## Curved Base Frame (FVCBF)

- Adjustable base frame for single center glass

## planning with horizontal frames

The following describes the floor to ceiling building accommodation provided by Tek Vue horizontal frames.

- If the site is in a constructed condition, the nominal floor to ceiling height is determined through site measurements and specification software
- Based on the nominal floor to ceiling height, base and ceiling frame have an overall building accommodation range of 2-1/4" (+1-1/4" / -1")





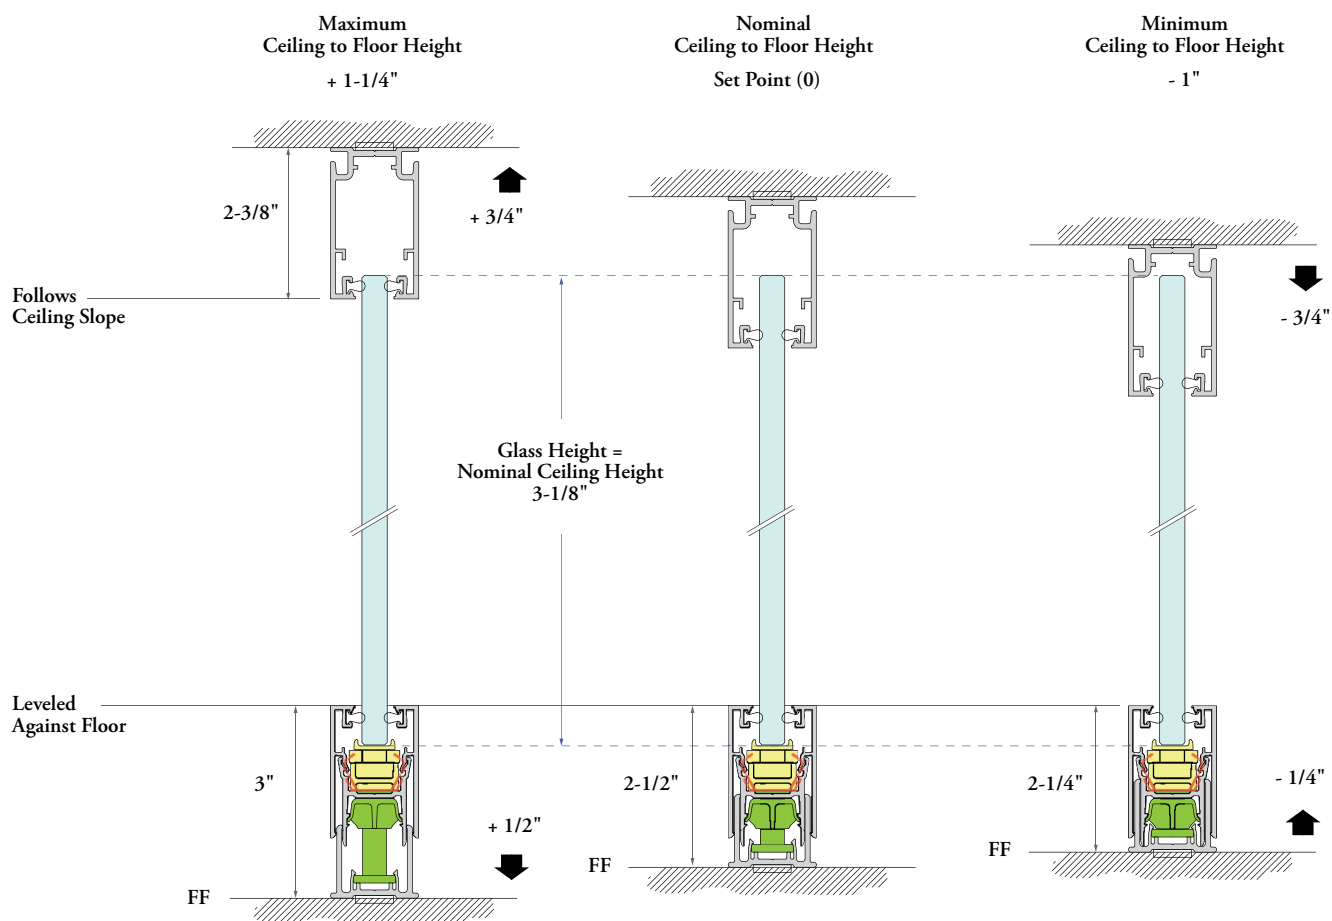


- The ceiling frame follows the ceiling slope and has an overall range 1-1/2" (+3/4" / -3/4")
- The base frame is leveled against the floor and has an overall range of 3/4" (+1/2" / -1/4")

# planning with horizontal frames (continued)

The following describes the type of cuts that are possible on site with horizontal frames.

- Cut restrictions refer to one single piece of framing on centerline reference (shown in red)
- When combining cut conditions on a single piece of framing, the smallest maximum value must be used (example, maximum frame cut length for inline to 90° is 119-1/2")


Cut Condition	Diagram	Cut Specification	Cut Restrictions*
Inline		None. Cut on site.	Min = 12" when used beside door frame Min = 14" in all other applications Max = 121"
90° Corner		None. Cut on site.	Min = 12" when used beside door frame Min = 14" in all other applications Max = 119-1/2"
Three-Way Corner		None. Cut on site.	External / Demising Frames: Min = 12" when used beside door frame Min = 14" in all other applications Max = 121"
Four-Way Corner		None. Cut on site.	Min = 12" when used beside door frame Min = 14" in all other applications Max = 121"
Variable Angle		None. Cut on site.	Min = 12" when used beside door frame Min = 14" in all other applications Max = 119-1/2" A = Min. 80° Only two variable angle joints per continuous run



## planning with curved horizontal frames

The following describes the floor to ceiling building accommodation provided by Tek Vue curved horizontal frames.


- If the site is in a constructed condition, the nominal floor to ceiling height is determined through site measurements and specification software
- Based on the nominal floor to ceiling height, curved base and curved ceiling frame have an overall building accommodation range of 1" (+1/2" / -1/2")

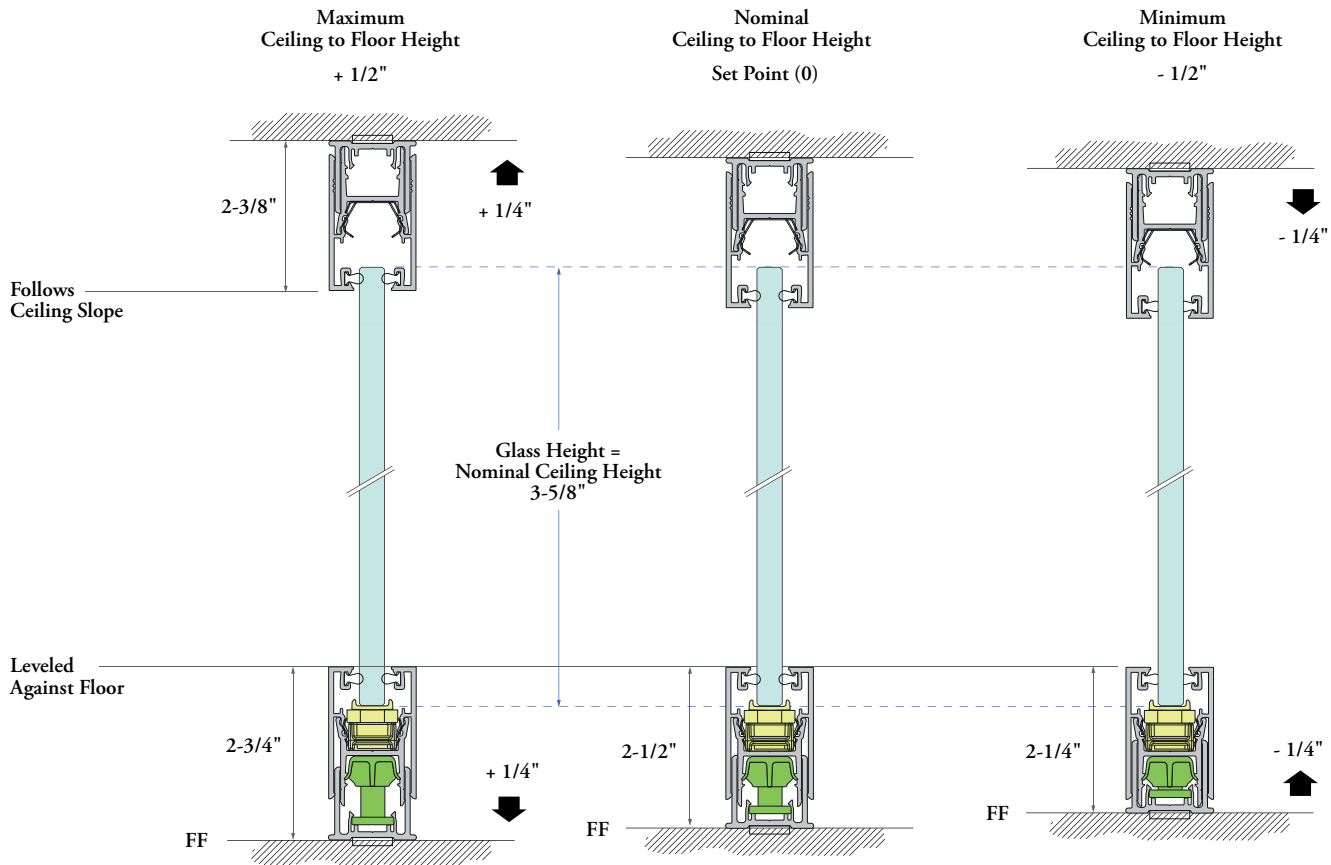

FF = Finished floor

- The curved ceiling frame follows the ceiling slope and has an overall range of 1/2" (+1/4" / -1/4")
- The curved base is leveled against the floor and has an overall range of 1/2" (+1/4" / -1/4")

Tek Vue glass fascias consists of two discrete elements; 10mm or 12mm single centered glass.

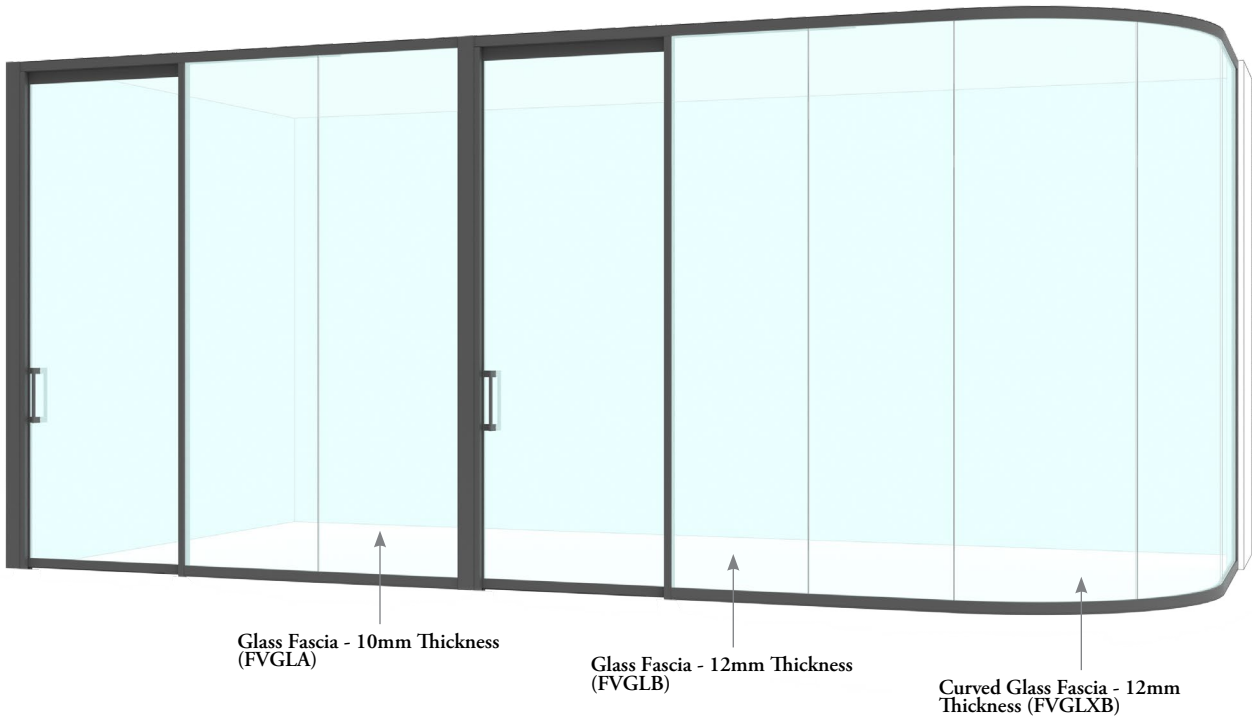

**Straight Glass**

- For single center glass application
- Type: Tempered or Laminated
- Finish: Clear or Clear Low Iron
- Height/Width Increments: Every 1/16"
- Two glass edge styles are available:
  - Straight on both sides
  - Mitered on one side and straight on one side

**Curved glass**

- For single center glass application
- Type: Tempered or Laminated
- Finish: Clear or Clear Low Iron
- Radius: 15" to 48"
- 45° (2 times to create a 90° wall, only for radius from 31" to 48") and 90° (only for radius from 15" to 30")
- Edge styles available:
  - Straight on both sides



**Glass Fascia - 10mm Thickness (FVGLA)**  
• 10mm monolithic glass fascia



**Glass Fascia - 12mm Thickness (FVGLB)**  
• 12mm monolithic glass fascia



**Curved Glass Fascia - 10mm Thickness (FVGLXA)**  
• 10mm monolithic glass fascia



**Curved Glass Fascia - 12mm Thickness (FVGLXB)**  
• 12mm monolithic glass fascia

## planning with glass fascias


Tek Vue 10mm and 12mm glass fascias consist of the following restrictions and limitations.

### Straight Glass Fascia

- Fascia Height:
  - 80" - 117" for tempered 10/12mm
  - 80" - 117" for laminated 10/12mm
- Fascia Width:
  - 12" - 36" for straight edge both sides (10mm)
  - 12" - 36" for mitered one side (10mm)
  - 12" - 48" for straight edge both sides (12mm)
  - 12" - 48" for mitered one side (12mm)
- Glass Thickness
  - Glass thickness must be the same in a continuous run
  - Glass thickness must be the same in adjacent runs that share a common vertical transition
- Maximum Run:
  - 24' continuous run for 10mm
  - 36' continuous run for 12mm

### Curved Glass Fascia

- Fascia Height:
  - 80 3/8" - 116 3/8" for tempered 10/12mm
  - 80 3/8" - 116 3/8" for laminated 10/12mm
- Fascia Radius:
  - 15" - 30": One glass fascia
  - 31" - 48" : Two glass fascias
- Fascia Angle:
  - 45° (two glass fascias for 31" - 48")
  - 90° (one glass fascia for 15" - 30")
- Glass Thickness:
  - Glass thickness must be the same in a continuous run
  - Glass thickness must be the same in adjacent runs that share a common vertical transition

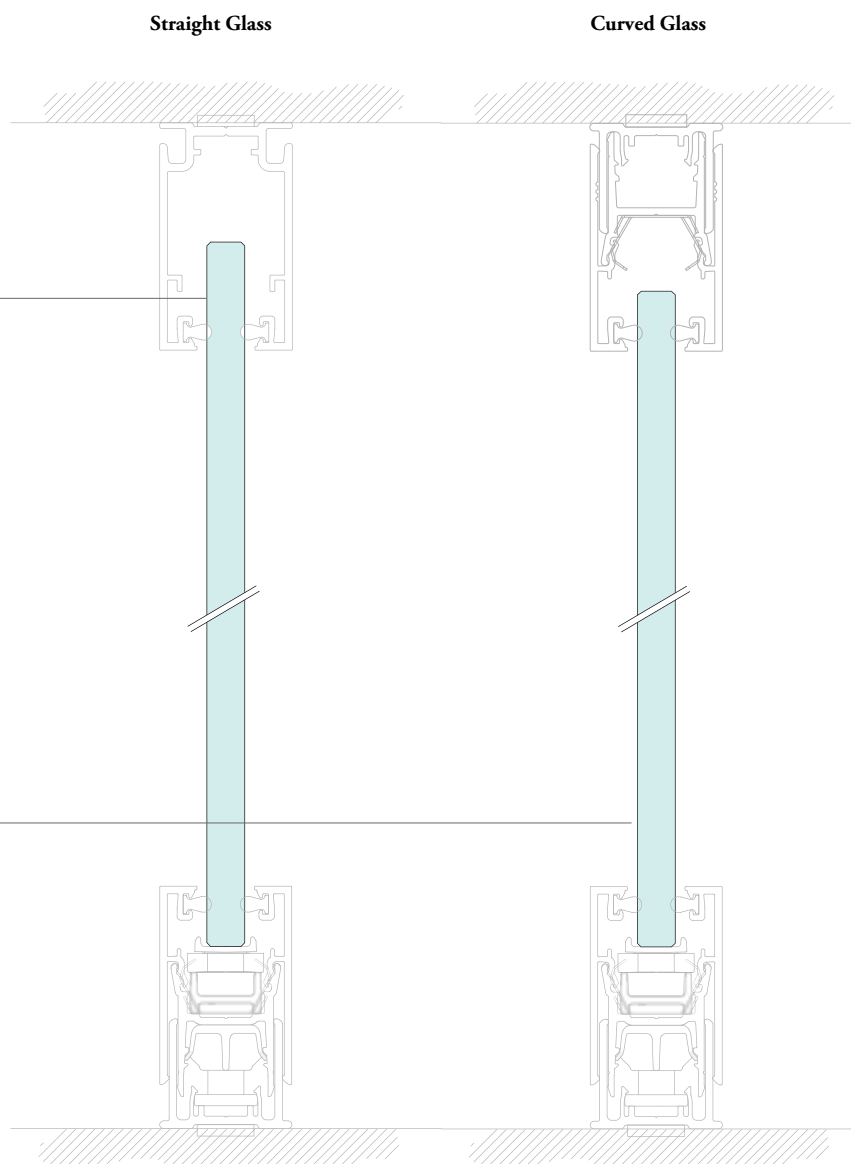



# application guide

## glass connector basics

Tek Vue offers a variety of glass connectors for different applications in 10mm and 12mm glass.


There are two main types of connectors offered

- Tape
- Clear Plastic

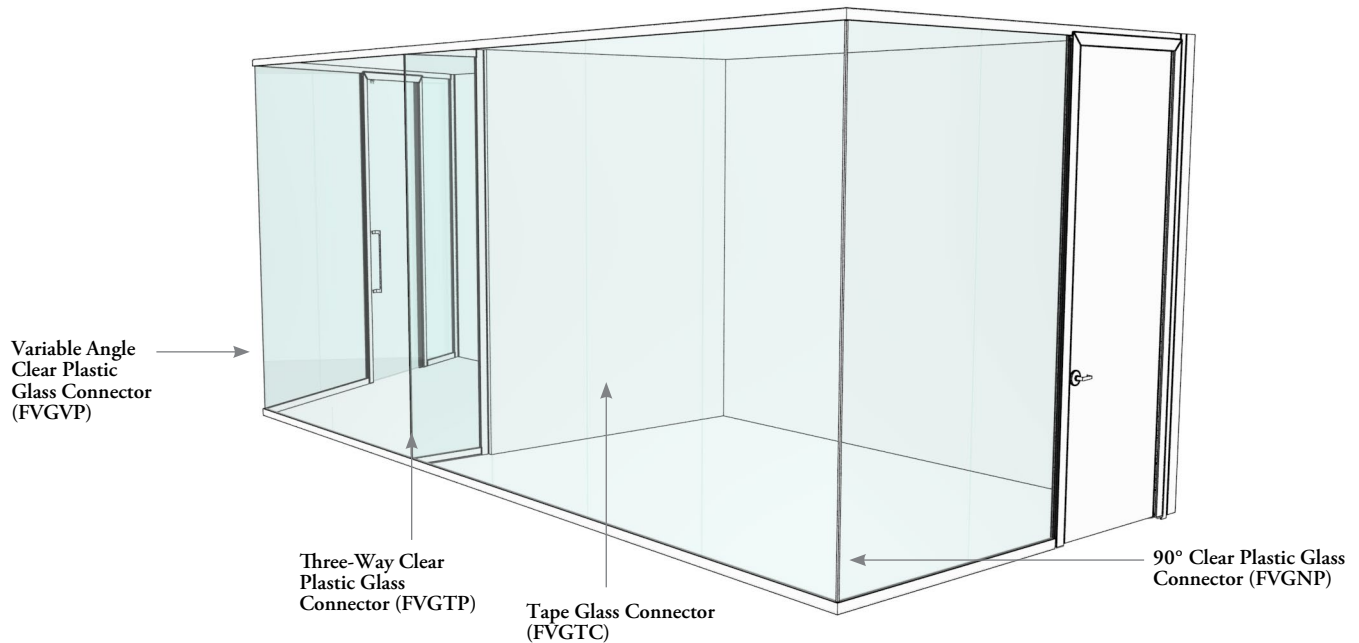


**Inline Clear Plastic Glass Connector (FVGIP)**

- Available for 10mm and 12mm glass




**Tape Glass Connector (FVGTC)**

- Available for 10mm and 12mm glass




**Variable Angle Clear Plastic Glass Connector (FVGVP)**

- Available for 10mm and 12mm glass



**90° Clear Plastic Glass Connector (FVGNP)**

- Available for 10mm and 12mm glass



**Three-Way Clear Plastic Glass Connector (FVGTP)**

- Available for 10mm and 12mm glass









# application guide

## planning with glass connectors

The following should be considered when planning and specifying glass connectors.


Below describes the applications, features and restrictions of each glass connector type;

- \* There is only one inline connector type per continuous run
- \*\* Corner/variable angle connector types can be specified separately from inline connectors
- Connector is on-module with framing seams/joints
- Connector is off-module with framing seams/joints
- Connector is optimal for glass to glass install ease
- Connector is optimal for glass to framing install ease

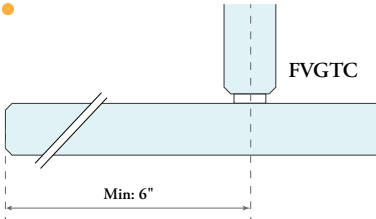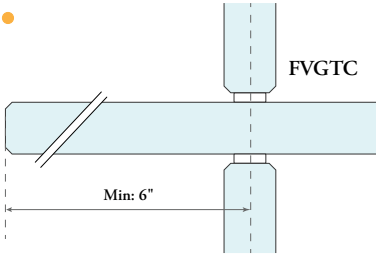		Clear Plastic (joined with tape)	Tape (2mm thick)
Inline	* □ ○ ●	 <p>Frame Seam/ Splice</p> <p>Min: 6"</p> <p>FVGIP</p>	 <p>Frame Seam/ Splice</p> <p>Min: 6"</p> <p>FVGTC</p> <p>FVGTC</p>
90° Corner	** ■ ○	 <p>FVGNP</p>	 <p>FVGTC</p>
Three-Way Corner	** ■ ○	 <p>FVGTP</p>	 <p>FVGTC</p> <p>Min: 6"</p>
Four-Way Corner	** □ ○ ●		 <p>FVGTC</p> <p>Min: 6"</p>
Variable Angle	** ■	 <p>Min: 80°</p> <p>FVGVP</p>	


# wall & door start basics

Tek Vue offers wall and door starts which can be perpendicular or articulated in reference to the base building.

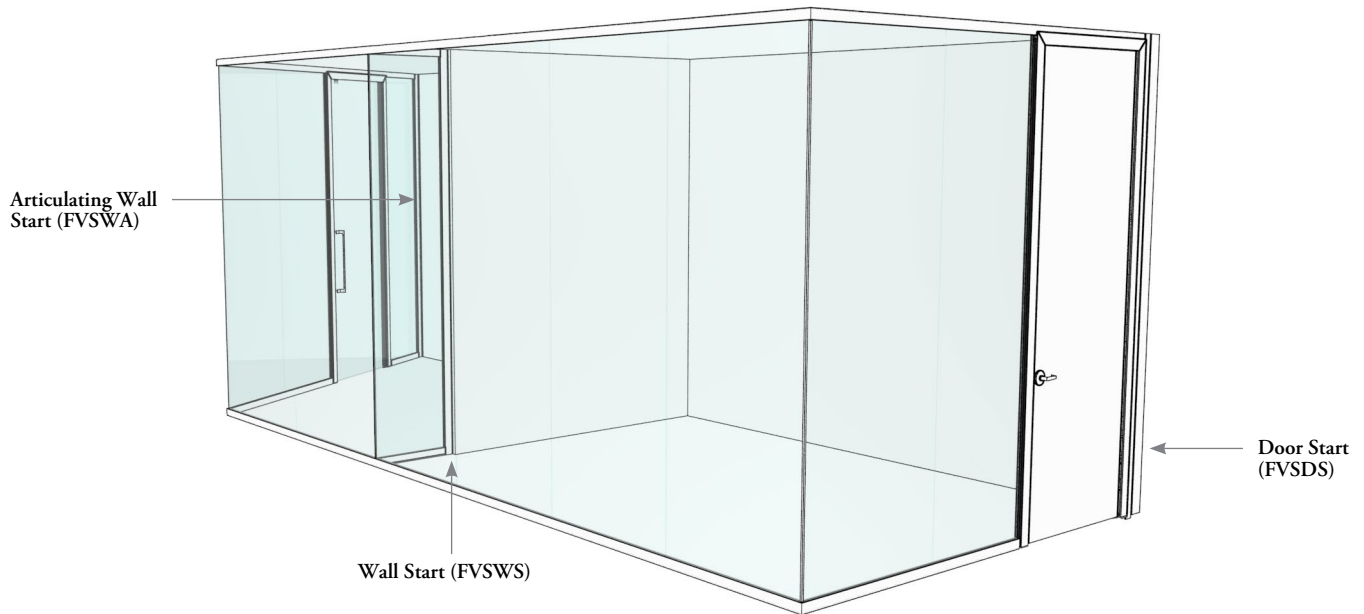


Finishes: Clear Anodized or Painted

Cut to size on site (up to 120" nominal ceiling height)




## Wall Start (FVSW)

- Adjustable, perpendicular wall start for monolithic single centered glass fascias against the base building
- Glass Thickness: 10mm or 12mm




## Articulating Wall Start (FVSWA)

- Adjustable, articulating wall start for monolithic single centered glass fascias against the base building
- Glass Thickness: 10mm or 12mm



## Door Start (FVSD)

- Adjustable, perpendicular door start for pivot or sliding doors against the base building







## Articulating Door Start (FVSDA)

- Adjustable, articulating door start for pivot or sliding doors against the base building


planning with wall & door starts

Below describes the applications, features and restrictions of wall and door starts.

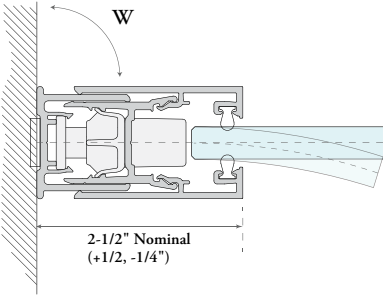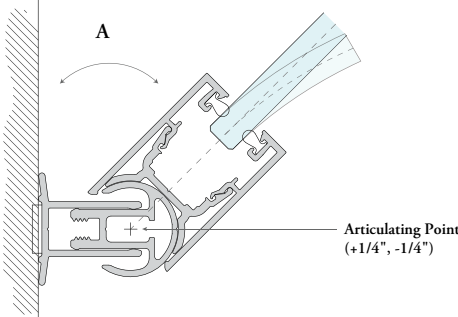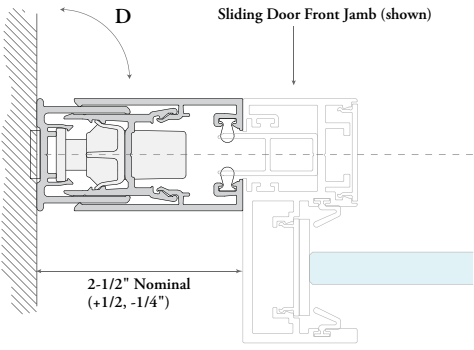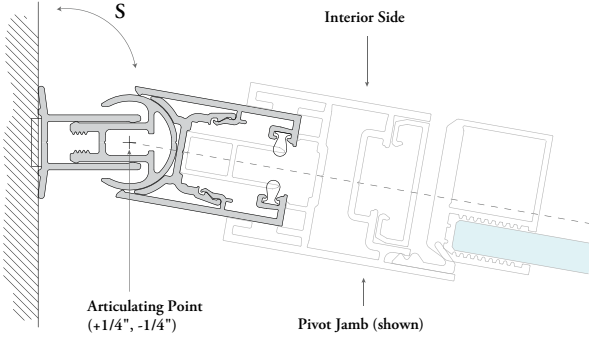
Wall Start (FVSW)		W: 90°
Articulating Wall Start (FVSWA)		A: 45° - 135
Door Start (FVSDS)		D: 90° Pivot Door Integration: - Strike Jamb - Applicable - Pivot Jamb - Applicable Sliding Door Integration: - Front Jamb - Applicable
Articulating Door Start (FVSDA)		S: 90°-110° (interior) Pivot Door Integration: - Strike Jamb - Applicable* - Pivot Jamb - Applicable Sliding Door Integration: - Front Jamb - Applicable* * Depending on drywall condition

# glass & drywall transition basics

The following outlines transitions that can be applied to glass and drywall.

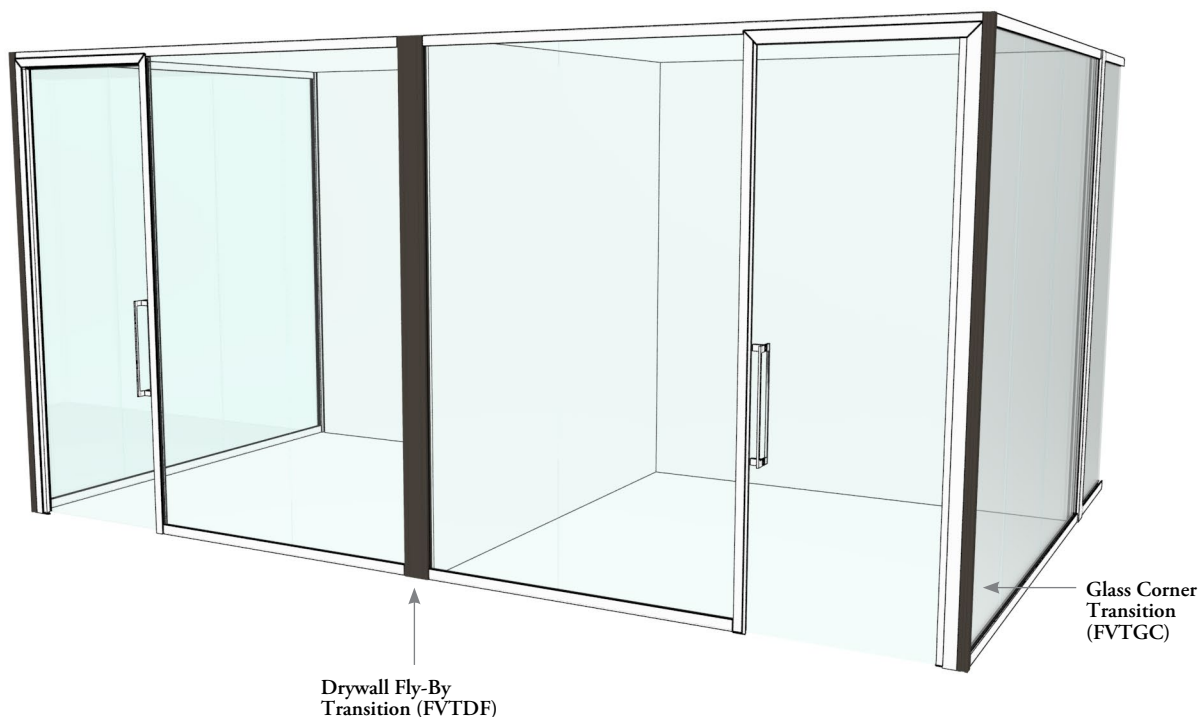


- Glass Thickness: 10mm or 12mm
- Finishes: Clear Anodized or Painted
- Cut to size on site (up to 120" nominal ceiling height)



## Glass Corner Transition (FVTGC)

- Corner transition for monolithic single centered glass fascias and doors
- Can be used to break run or simplify on-site cut conditions for horizontal frames
- Available configurations;
  - Inline,
  - 90°
  - Three-Way,
  - Four-Way,













## Drywall Fly-By Transition (FVTDF)

- Adjustable transition for monolithic single centered glass storefront directly against demising drywall
- Can accommodate drywall up to 6" nominal thickness
- Available configurations;
  - Inline
  - 90°
- Receptacle cut out option









planning with glass corner transitions

The following describes the main conditions that are possible with the glass corner transition.

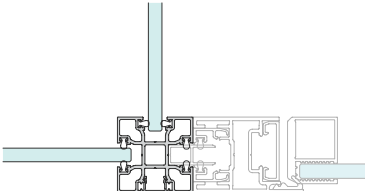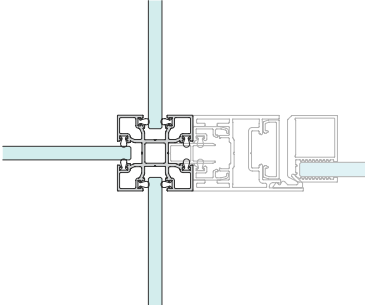	Glass	Pivot Door	Sliding Door
Glass Corner Transition, Inline (FVTGC)			
Glass Corner Transition, 90° (FVTGC)		 <p>Door can be applied to one side only</p>	 <p>Door can be applied to one side only</p>
Glass Corner Transition, Three-Way (FVTGC)		 <p>Door can be applied to both sides of storefront if necessary</p>	 <p>Door can be applied to both sides of storefront if necessary</p>
Glass Corner Transition, Four-Way (FVTGC)		 <p>Door can be applied to both sides if required</p>	 <p>Door can be applied to both sides if required</p>


planning with drywall fly-by transitions

The following describes the main conditions that are possible with the drywall fly-by transition.

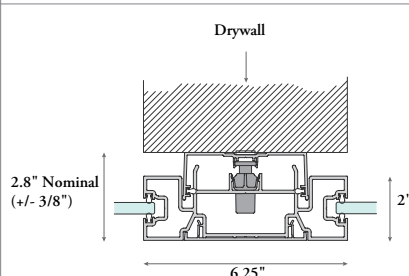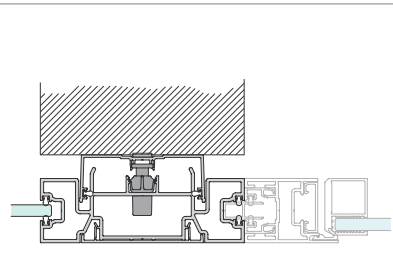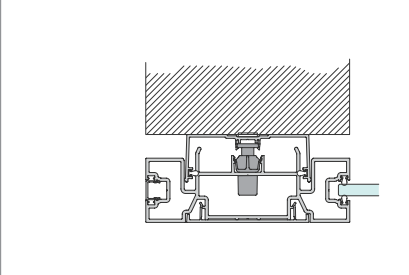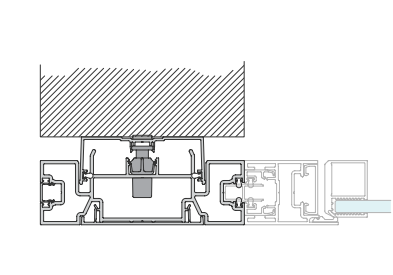
	Glass	Pivot Door	Sliding Door
Drywall Fly-By Transition, Inline (FVTDF)			
Drywall Fly-By Transition, 90° (FVTDF)			

## altos & focus transition basics

The following outlines transitions that can be applied to Altos and Focus wall programs.

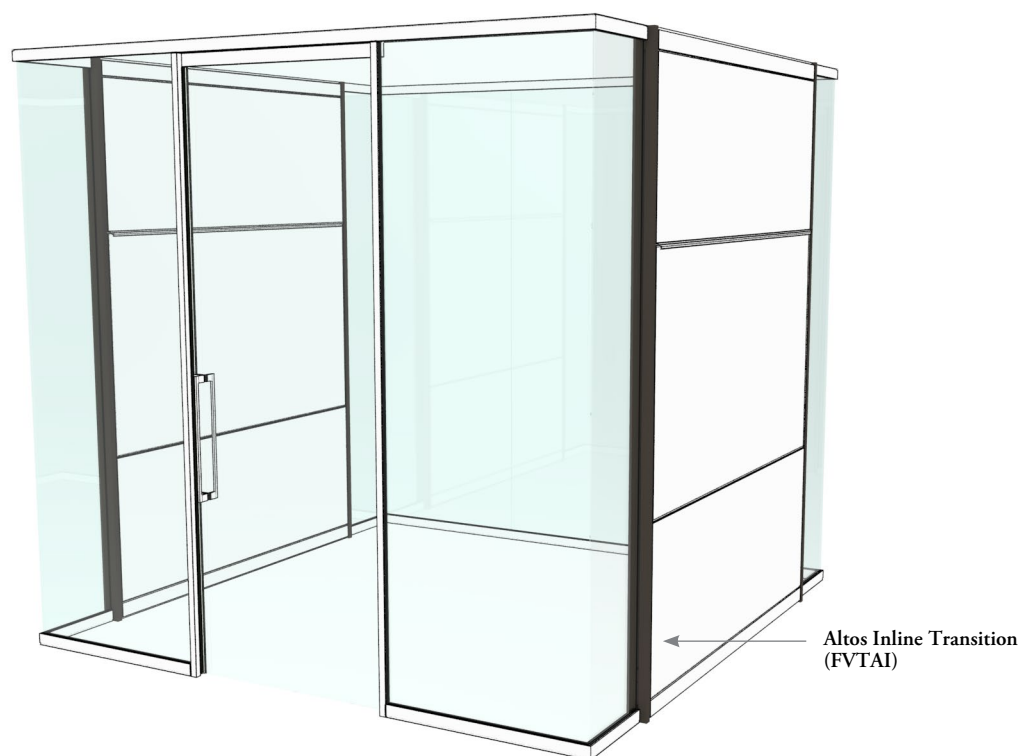


- Glass Thickness: 10mm or 12mm
- Finishes: Clear Anodized or Painted
- Cut to size on site (up to 120" nominal ceiling height)




### Altos Inline Transition (FVTAI)

- Inline transition for monolithic single centered glass fascia to Altos wall



### Altos Corner Transition (FVTAC)

- Corner transition for monolithic single centered glass storefront directly against demising Altos wall
- Available configurations;
  - 90°
  - Three-Way
- Receptacle cut out option



### Focus Corner Transition (FVTFC)










- Corner transition for monolithic single centered glass storefront directly against demising Focus wall
- Available configurations;
  - 90°
  - Three-Way
- Receptacle cut out option

# application guide

## planning with altos transitions

The following describes the main conditions that are possible with Altos inline and corner transitions.







Altos side of transition can be planned with solid (portrait/landscape), clerestory or any door type if required.

	Glass	Pivot Door	Sliding Door
<b>Altos Inline Transition (FVTAI)</b>		 <p>Altos can be applied to both sides of pivot door</p>	 <p>Can be applied to front and back jamb</p>
<b>Altos Corner Transition, 90° (FVTAC)</b>		 <p>Door can be applied to one side only</p>	 <p>Door can be applied to one side only</p>
<b>Altos Corner Transition, Three-Way (FVTAC)</b>		 <p>Door can be applied to both sides of storefront if necessary</p>	 <p>Door can be applied to both sides of storefront if necessary</p>

application guide


planning with focus transitions

The following describes the main conditions that are possible with Focus inline and corner transitions.


	Glass	Pivot Door	Sliding Door
Focus Corner Transition, 90° (FVTFC)	<div><p>Focus Wall End (solid or double glazed)</p></div>	<div><p>Door can be applied to one side only</p></div>	<div><p>Door can be applied to one side only</p></div>
Focus Corner Transition, Three-Way (FVTFC)	<div><p>Focus Wall End (solid or double glazed)</p></div>	<div><p>Door can be applied to both sides of storefront if necessary</p></div>	<div><p>Door can be applied to both sides of storefront if necessary</p></div>

# wall end transition basics

The following outlines transitions that can be used in wall end applications

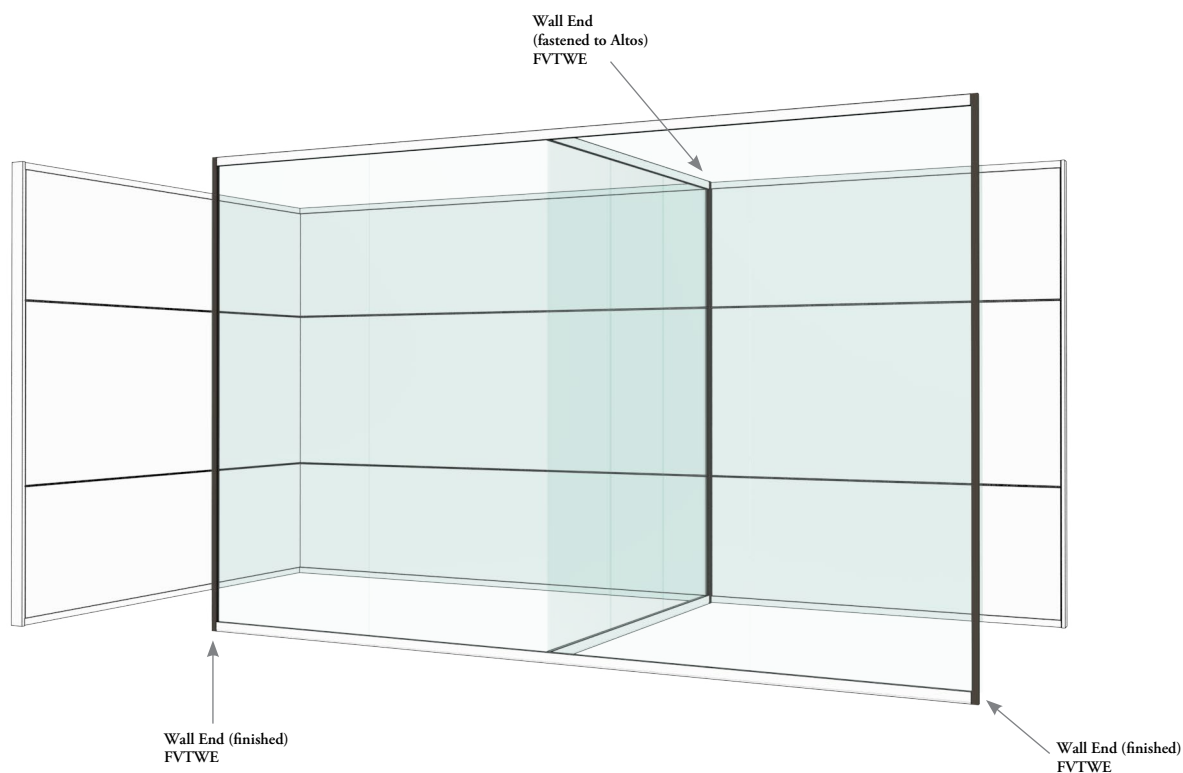

- Glass Thickness: 10mm or 12mm
- Finishes: Clear Anodized or Painted
- Cut to size on site (up to 120" nominal ceiling height)







## Wall End (FVTWE)

- Wall end transition for monolithic single centered glass fascias
- Not to be used against drywall
- Available configurations;
  - finished Wall End
  - fastened to Altos,
  - fastened to Focus


planning with wall end transitions

The following describes the conditions that are possible with the wall end transition.


	Finished End	Fastened to Altos		Fastened to Focus
Wall End (FVTWE)		 On Module	 Off Module	
Restrictions		<b>Portrait / Landscape</b> Can be planned with Solid, Fabric Wrapped and Microperforated fascias (secured via vertical reveal)	<b>Portrait</b> Can be planned with Solid and Fabric Wrapped fascias (secured via fascia substrate) <b>Landscape</b> Can be planned with Solid, Fabric Wrapped and Microperforated fascias (secured via horizontal reveals only)	Can be planned with Focus Corner Transition (FWTCD)

# articulating & electrical transition basics

The following outlines transitions for articulating and electrical applications.

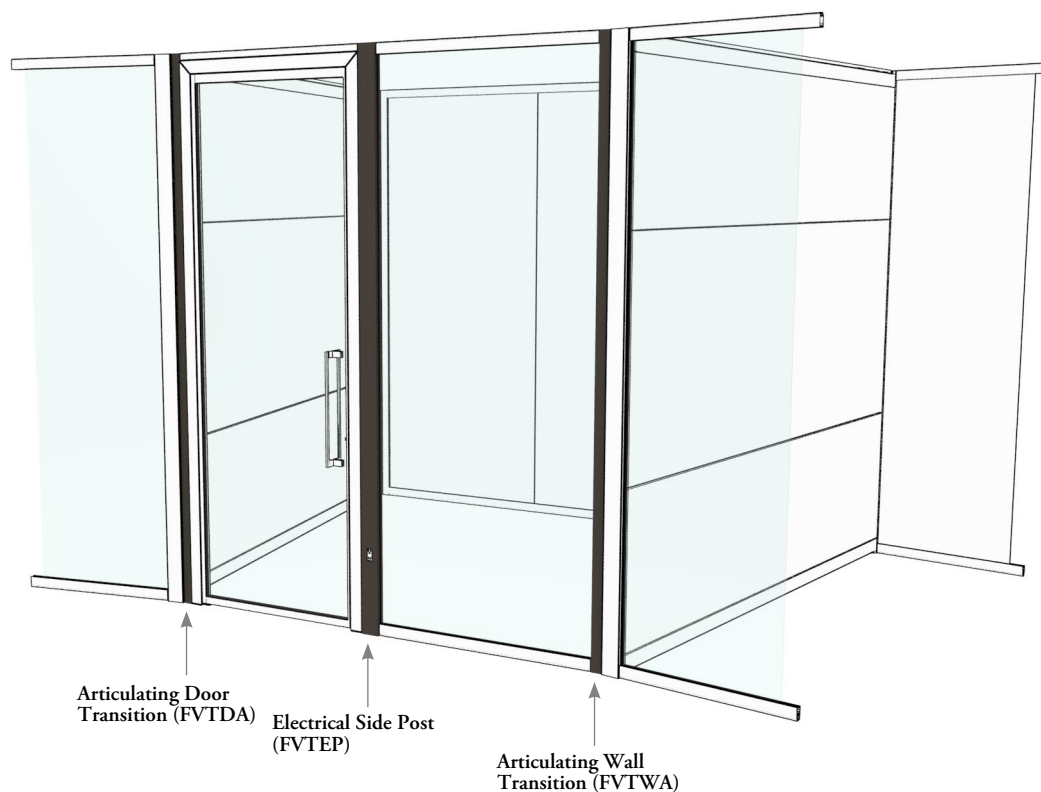


- Finishes: Clear Anodized or Painted
- Cut to size on site (up to 120" nominal ceiling height)




## Articulating Wall Transition (FVTWA)

- Articulating transition for monolithic single centered glass fascia
- Glass Thickness: 10mm or 12mm



## Articulating Door Transition (FVTDA)

- Articulating transition for pivot or sliding door



## Electrical Side Post (FVTEP)

- Electrical post used inline with pivot or sliding door
- Glass Thickness: 10mm or 12mm
- Light Switch or Receptacle cutout option



planning with articulating transitions



The following describes the conditions that are possible with articulating wall and door transitions.

	Articulating Wall Transition (FVTWA)	Articulating Door Transition (FVTDA)
Glass Corner Transition (FVTGC)		
Drywall Fly By Transition (FVTDF)		
Altos Corner Transition (FVTAC)		
Focus Corner Transition (FVTFC)		
	<p>W: 70° - 110° (interior)</p> <p>Articulating wall transition can be applied to both sides of storefront if necessary</p> <p>Articulating wall transition can be applied to all sides of Glass Corner Transition (FVTGC) if necessary</p>	<p>D: 90° -110° (interior)</p> <p>Pivot Door Integration:</p> <ul style="list-style-type: none"><li>- Strike Jamb - Applicable</li><li>- Pivot Jamb - Applicable</li></ul> <p>Sliding Door Integration:</p> <ul style="list-style-type: none"><li>- Front Jamb - Applicable</li></ul> <p>Articulating door transition can be applied to both sides of storefront if necessary</p>


# application guide

## planning with electrical transitions

The following describes the conditions that are possible with the electrical side post.

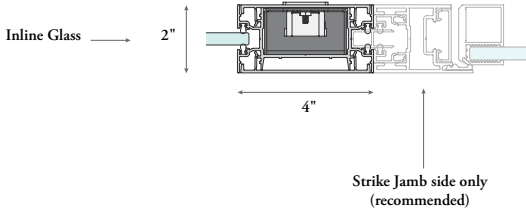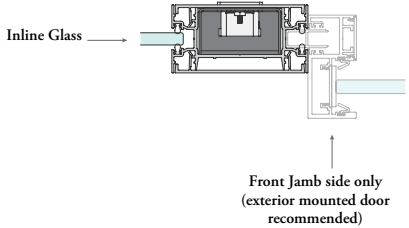	Pivot Door	Sliding Door
Electrical Side Post (FVTEP)	 <p>Inline Glass → 2" → 4" → Strike Jamb side only (recommended)</p>	 <p>Inline Glass → Front Jamb side only (exterior mounted door recommended)</p>

Below describes the electrical cut out options offered in the electrical side post.

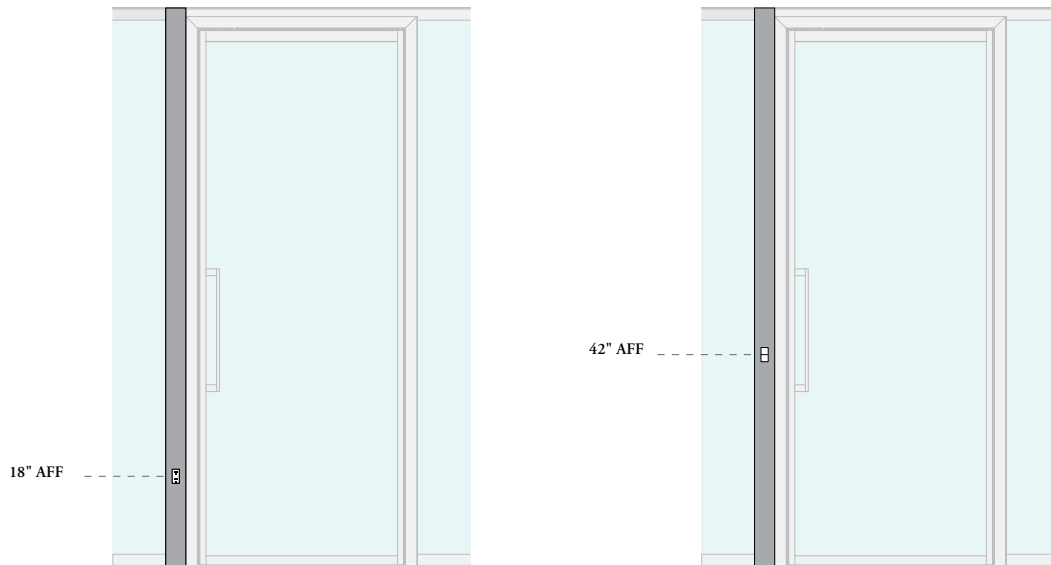

### Receptacle Module Cut Out


- Can be oriented on interior or exterior
- Opening is always factory cut
- Low Profile Receptacle Module (FVARM) specified separately

### Light Switch Cut Out

- Can only be oriented on interior
- Opening is always factory cut
- Low Profile Light Switch (FVALS) specified separately

## planning with electrical transitions (continued)

The following describes the additional electrical cut out options offered in other transitions.

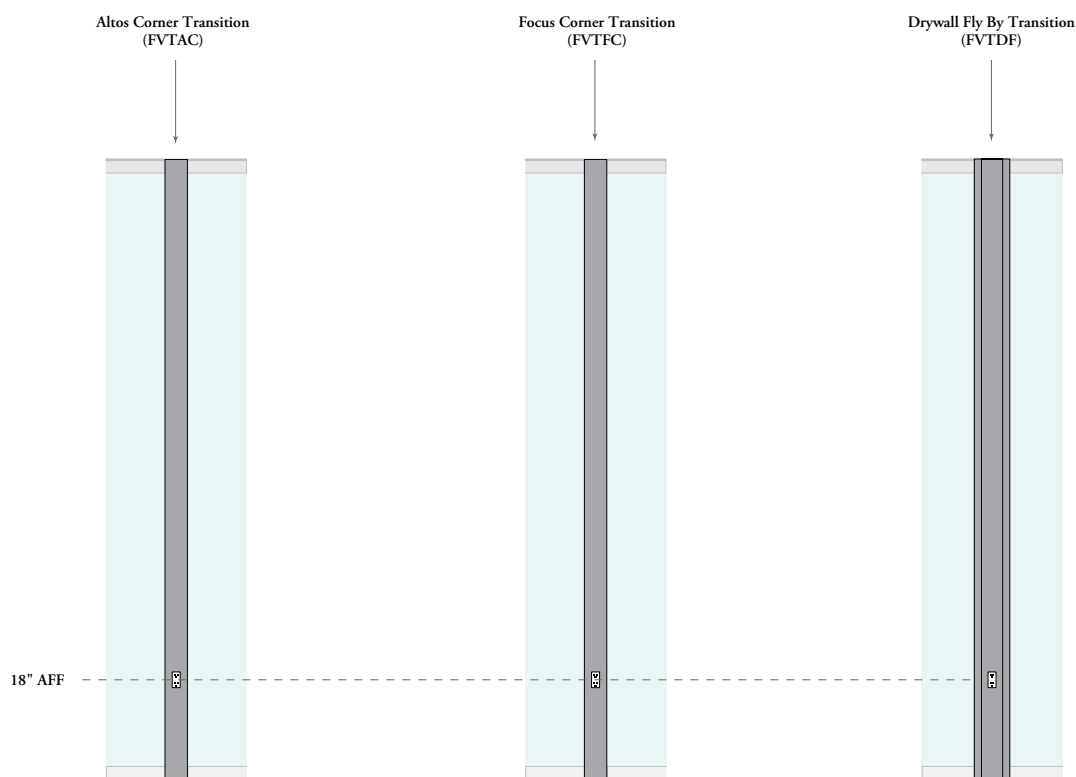


### Receptacle Module Cut Out

- Opening is always factory cut
- Electrics oriented towards exterior
- Low Profile Receptacle Module (FVARM) specified separately

# application guide

## pivot door program basics

The pivot door program consists of the following discrete elements.

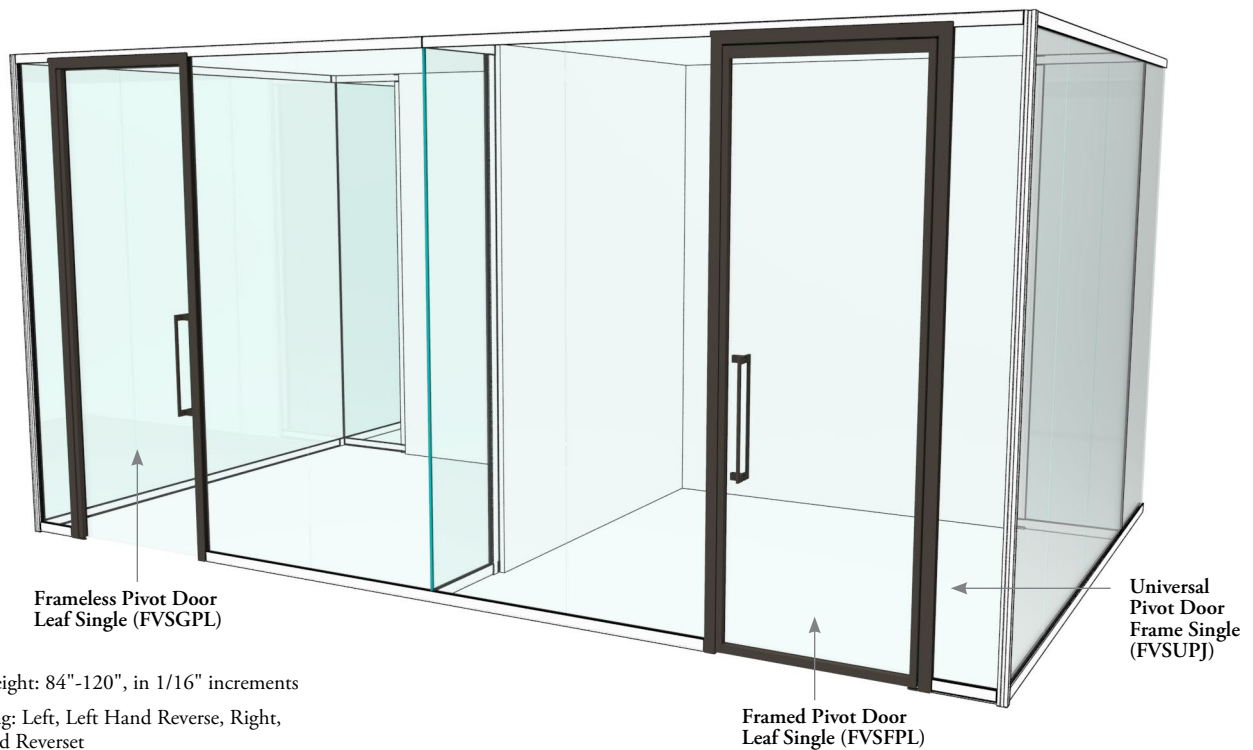

- Ceiling Height: 84"-120", in 1/16" increments
- Door Swing: Left, Left Hand Reverse, Right, Right Hand Reverset
- Hardware Prep: Linear Pull, Ladder Pull or Schlage ALX Series
- Stile and Trim Finish: Clear Anodized or Painted



### Frameless Pivot Door Leaf Single (FVSGPL)

- 10mm frameless glass single leaf pivot door with 1-3/4" pivot stile
- Includes inner jamb and header trims
- Available in 40" and 42" nominal widths with clear openings of 35-3/8" (898mm) and 37-3/8" (949mm) respectively
- Bottom seal not available
- Hold-Open Closer not available
- Optional Hidden Closer
- Doors without Closer or with Hidden Closer will be supplied with Magnetic Door Stop
- Glass Type: Tempered only
- Glass Finish: Clear or Clear Low Iron
- Roller latch is always included with the soft close and selected handle type
- Roller latch catch plate is painted according to frame finish
- In reversed application, the door stop will be located in the passage and can therefore be seen as a tripping hazard



### Framed Pivot Door Leaf Single (FVSFPL)

- 1-3/4" framed single leaf pivot door with 10mm glass insert
- Includes inner jamb and header trims
- Available in 40" and 42" nominal widths with clear openings of 35-7/8" and 37-3/8" respectively
- Optional Drop Seal
- Optional Hold-Open Closer or Hidden Closer
- Doors without Closer or with Hidden Closer will be supplied with Magnetic Door Stop
- Doors with Hold-Open Closer will be supplied with Round Door Stop
- Glass Type: Tempered only
- Glass Finish: Clear or Clear Low Iron
- Optional kickplate
- Roller latch is always included with the soft close and selected handle type
- Roller latch catch plate is painted according to frame finish
- In reversed application, the door stop will be located in the passage and can therefore be seen as a tripping hazard

## pivot door program basics (continued)



### **Solid Pivot Door Leaf Single (FVSSPL)**


- Solid single leaf pivot door with 1-3/4" pivot stile
- Includes inner jamb and header trims
- Available in 40" and 42" nominal widths with clear openings of 35-5/16" (898mm) and 37-5/16" (948mm) respectively
- Optional Brush Seal
- Optional Hold-Open Closer or Hidden Closer
- Doors without Closer or with Hidden Closer will be supplied with Magnetic Door Stop
- Doors with Hold-Open Closer will be supplied with Round Door Stop
- Laminate, Flintwood or Veneer finish
- Roller latch is always included with the soft close and selected handle type
- Roller latch catch plate is painted according to frame finish
- In reversed application, the door stop will be located in the passage and can therefore be seen as a tripping hazard



### **Universal Pivot Door Frame Single (FVSUPJ)**

- Universal pivot door frame works with any single pivot door leaf type, cut to height on site and is not specific to hardware or orientation
- Mitered frame consists of two jambs and one header
- 40" and 42" nominal widths
- Finishes: Clear Anodized or Painted


# pivot door program basics (continued)

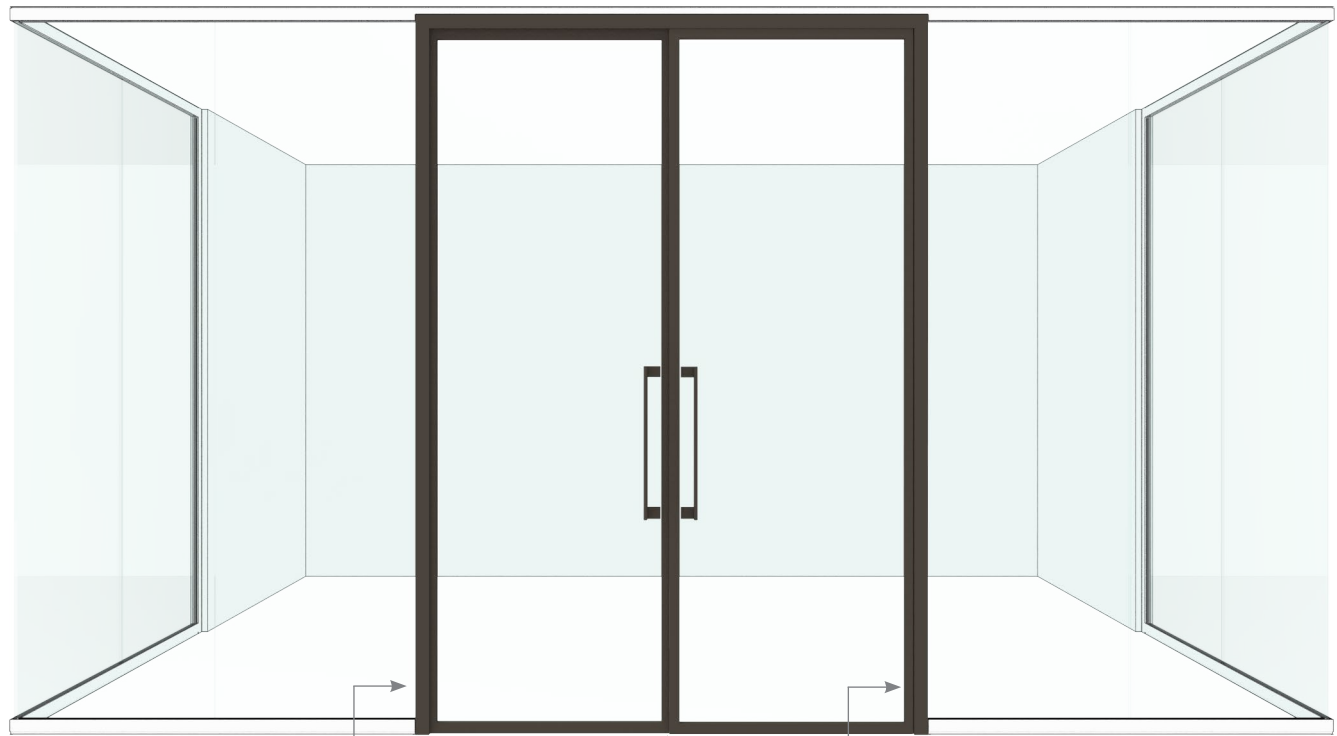

Pivot Door Jamb  
Connection  
(FVDJPC)


Framed Pivot  
Door Leaf Double  
(FVDPDF)

Universal Pivot  
Door Frame  
Double (FVDFPD)



## Framed Pivot Door Leaf Double (FVDPL)


- 1-3/4" framed double leaf pivot door with 10mm glass insert
- Includes inner jamb and header trims
- Available in 78" and 84" nominal widths with clear openings of 69-7/16" (1764mm) and 75-7/16" (1916mm) respectively
- Optional Brush Seal
- Optional Hold-Open Closer or Hidden Closer (included on both leaves)
- Glass Type: Tempered only
- Glass Finish: Clear or Clear Low Iron
- Includes Door Stop
- Optional kickplate
- Active right hand leaf, inactive leaf
- Doors without Closer or with Hidden Closer will be supplied with Magnetic Door Stop
- Doors with Hold-Open Closer will be supplied with Round Door Stop
- Due to the astragal, holes are visible at the top and bottom of the door.
- Roller latch is always included with the soft close and selected handle type
- Roller latch catch plate is painted according to frame finish
- In reversed application, the door stop will be located in the passage and can therefore be seen as a tripping hazard



## Solid Pivot Door Leaf Double (FVDSPL)


- 1-3/4" pivot stile
- Includes inner jamb and header trims
- Available in 78" and 84" nominal widths with clear openings of 69-5/16" (1761mm) and 75-5/16" (1914mm) respectively
- Optional Brush Seal
- Optional Hold-Open Closer or Hidden Closer
- Doors without Closer or with Hidden Closer will be supplied with Magnetic Door Stop
- Doors with Hold-Open Closer will be supplied with Round Door Stop
- Laminate, Flintwood or Veneer finish
- Due to the astragal, holes are visible at the top and bottom of the door.
- Roller latch is always included with the soft close and selected handle type
- Roller latch catch plate is painted according to frame finish
- In reversed application, the door stop will be located in the passage and can therefore be seen as a tripping hazard

## pivot door program basics (continued)



### **Universal Pivot Door Frame Double (FVDFPD)**

- Cut to height on site
- Mitered frame consists of two jambs and one header
- 78" and 84" nominal width
- Finishes: Clear Anodized or Painted




### **Pivot Door Jamb Connection (FVDJPC)**

- Used for single and double door frame applications
- Configurable kit of parts that connects jambs of pivot door to adjacent wall conditions
- Strike Jamb Conditions: 10mm or 12mm glass, Corner/Fly-by Transition, Door Start/Articulating
- Pivot Jamb Conditions: 10mm or 12mm glass, Corner/Fly-by Transition, Door Start/Articulating
- Finishes: Clear Anodized or Painted

# planning with pivot door programs


The following describes how the pivot door frame and leaf interface with the wall program, ceiling and finished floor.

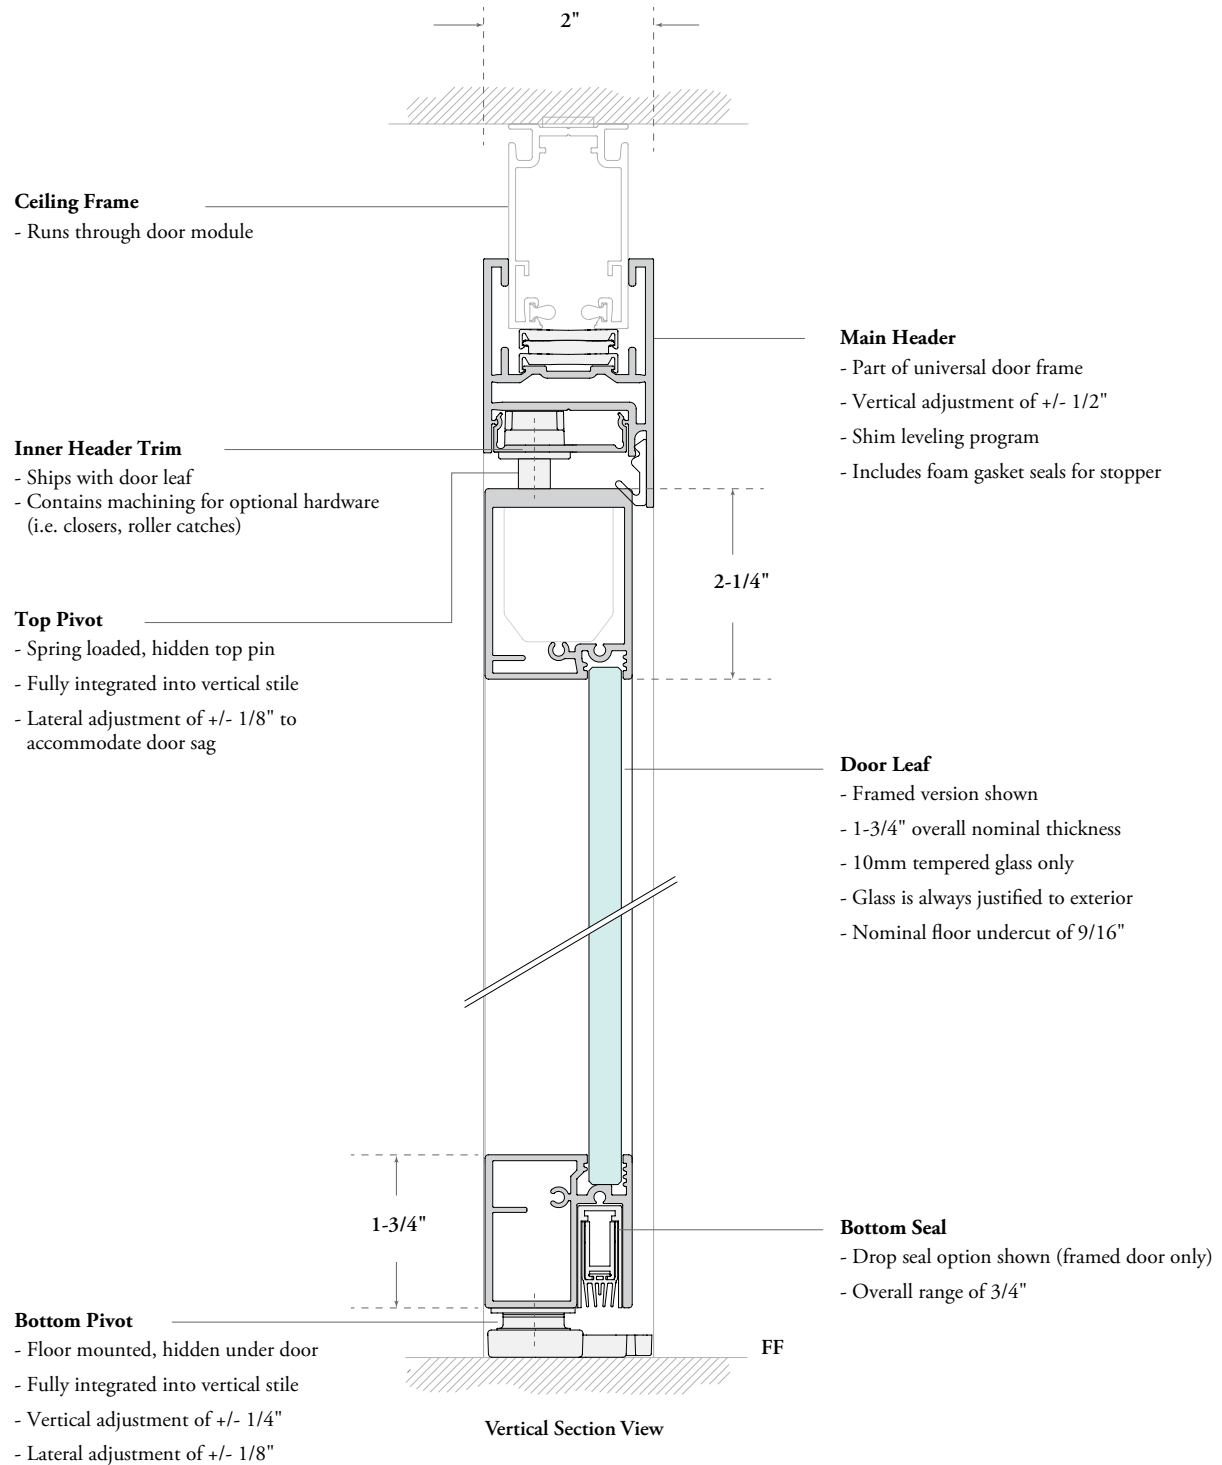



## planning with pivot door programs (continued)



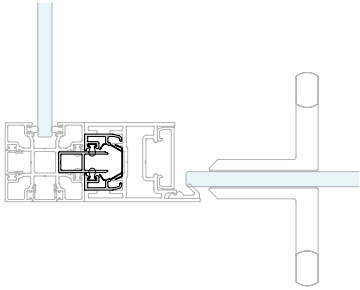

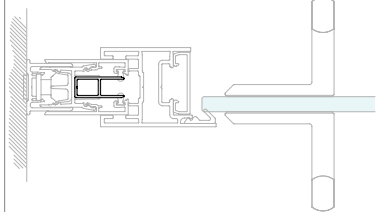

The following describes additional details and configurations of the pivot door program.

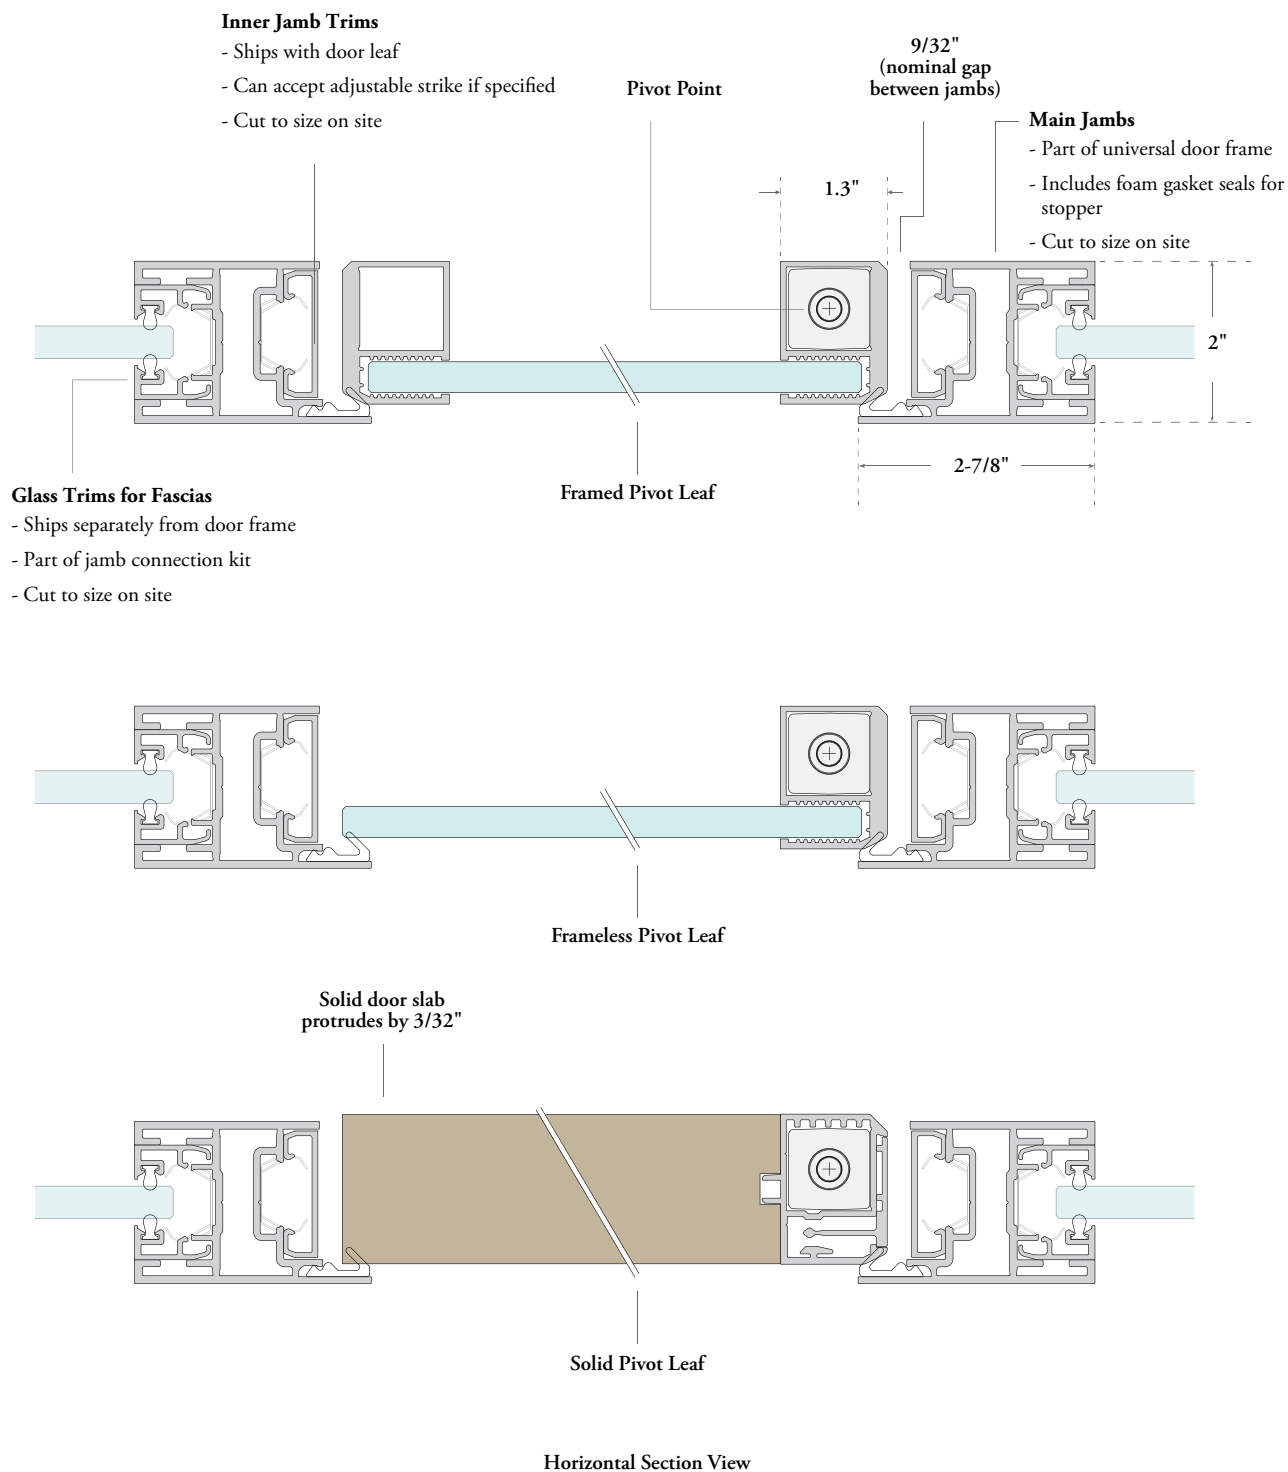

# planning with pivot door jamb connections

The pivot door jamb connection is configurable kit of parts that connects jambs of a pivot door to adjacent wall conditions.




Below describes the strike and pivot jamb conditions that can be specified and the restrictions that exist.

Pivot Door Jamb Connection (FVDJPC)	Strike Jamb	Pivot Jamb	Restrictions
10mm or 12mm glass			Each side of door must be specified with same glass thickness (10mm or 12mm)
Corner or Fly-By Transitions			
Door Start or Articulating			

# planning opening range with pivot doors


The opening range of a pivot door depends on the specific door leaf and hardware specified.

The chart below communicates the maximum angles possible in each application.

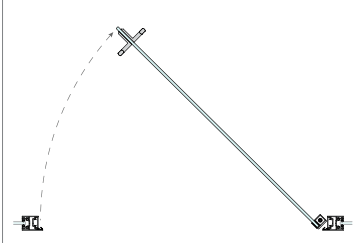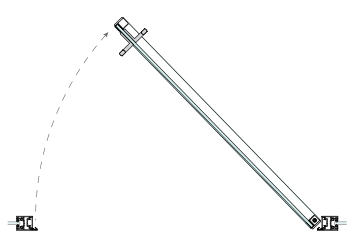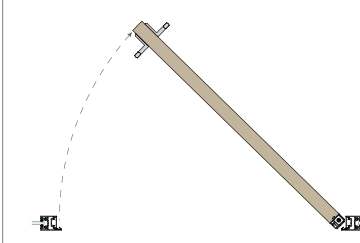	 <b>Frameless Pivot Leaf</b>	 <b>Framed Pivot Leaf</b>	 <b>Solid Pivot Leaf</b>
No Closer	Maximum 180°	Maximum 115°	Maximum 115°
Closer with Hold Open (110 degree closing functionality)	n/a	Maximum 110°	Maximum 110°
Hidden Closer (75 degree closing functionality)	Maximum 180°	Maximum 115°	Maximum 115°

When planning with the door stop:



- Whenever possible, place the stop close to nearby walls so it is not an obstacle to the path of travel
- Ensure the stop prevents door hardware (example: pulls, levers) from making contact with nearby walls
- Position the stop so it is close to the outer edge of the door leaf for maximum support in the open position

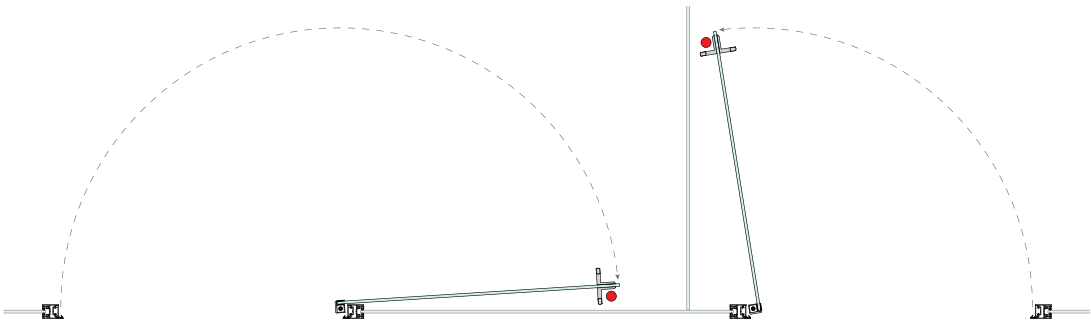

door stop planning examples

# sliding door program basics

The sliding door program consists of the following discrete elements:

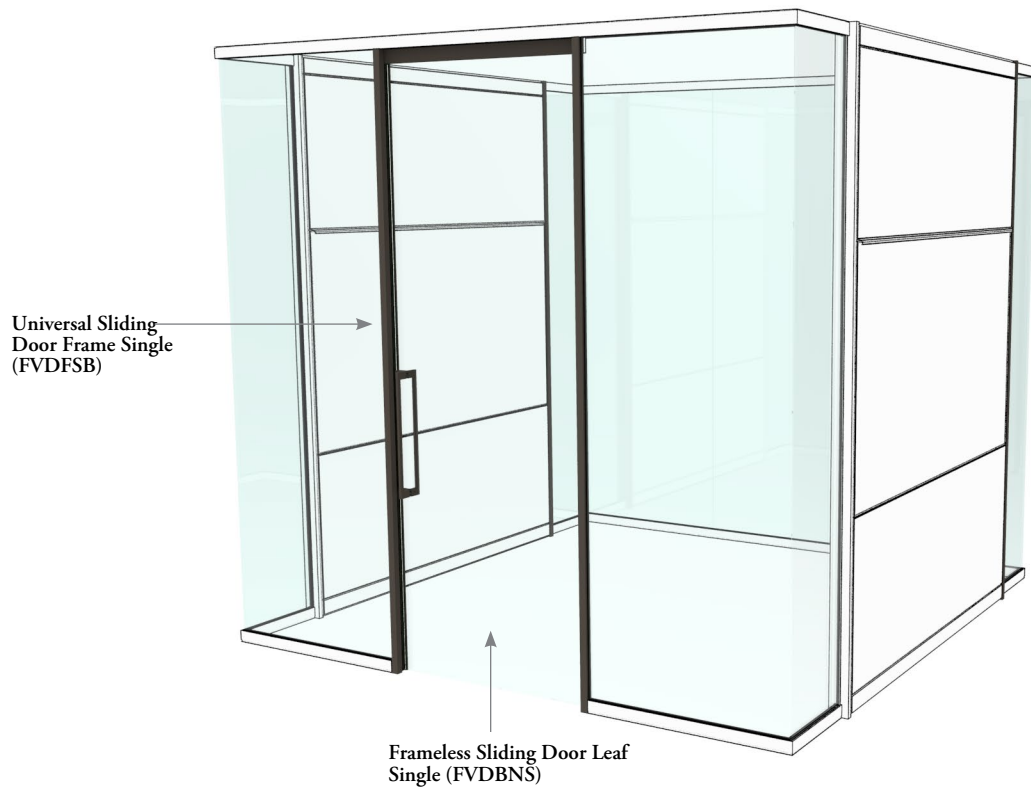


## Frameless Sliding Door Leaf Single (FVSGSL)

- 10mm frameless glass single leaf sliding door with trolley cover
- Includes front inner jamb trim
- Ceiling Height: 84" - 120", in 1/16" increments
- Available in 40" and 42" nominal widths with clear openings of 34-9/16" and 36-9/16" respectively
- Door Slide: Left or Right
- Rail Orientation: Exterior or Interior
- Hardware Prep: Linear Pull or Ladder Pull
- Trolley Cover and Trim Finish: Clear Anodized or Painted
- Glass Type: Tempered only
- Glass Finish: Clear or Clear Low Iron
- Bottom seal not available



## Framed Sliding Door Leaf (FVSFSL)



- 1" framed single leaf sliding door with 10mm glass insert
- Includes front inner jamb trim
- Ceiling Height: 84" - 120", in 1/16" increments
- Available in 40" and 42" nominal widths with clear openings of 34-9/16" and 36-9/16" respectively
- Door Slide: Left or Right
- Rail Orientation: Exterior or Interior
- Hardware Prep: Linear or Ladder Pull
- Frame Finish: Clear Anodized or Painted
- Glass Type: Tempered Only
- Glass Finish: Clear or Clear Low Iron
- Brush Seal Standard



## Universal Sliding Door Frame Single (FVSUSJ)


- Universal sliding door frame works with single leaf, cut to height on site and is not specific to hardware or orientation
- Consists of two jambs and an adjustable top rail (84" fixed length)
- 40" and 42" nominal widths (door module)
- Includes soft open / soft close mechanism as standard
- Finishes: Clear Anodized or Painted

## sliding door program basics (continued)

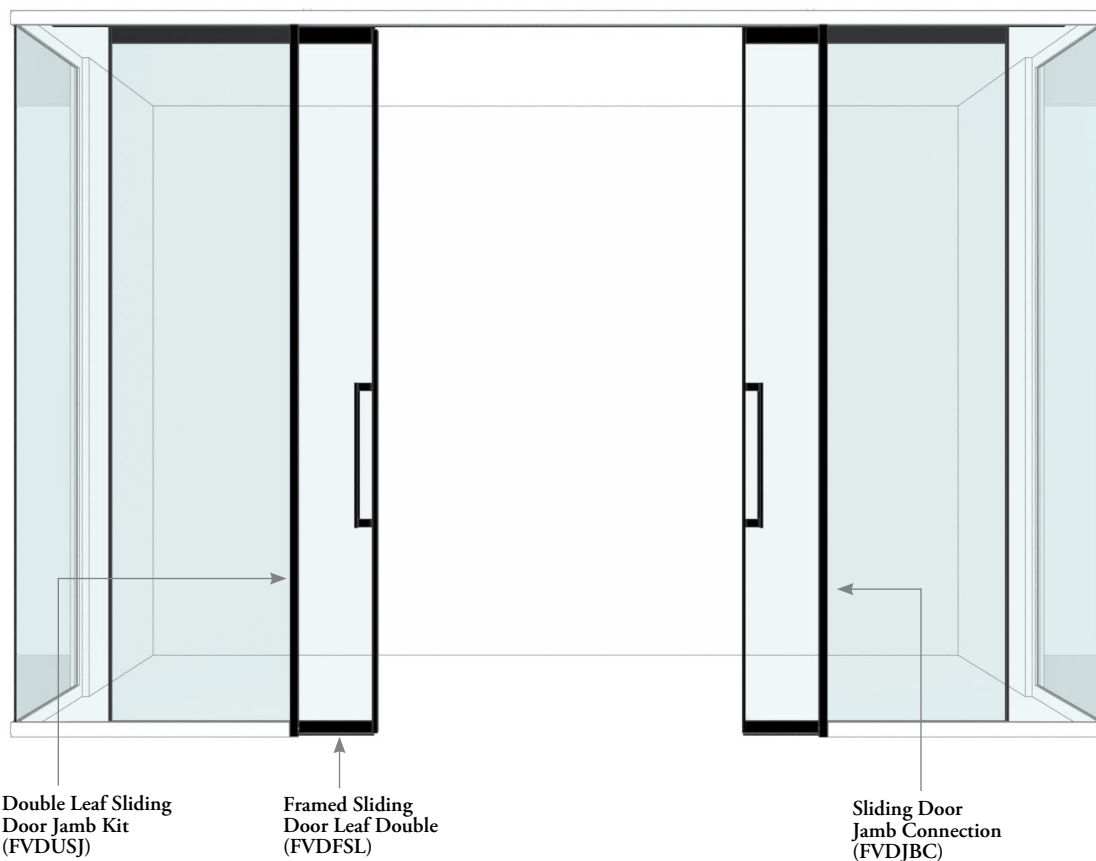


### Framed Sliding Door Leaf Double (FVDFSL)

- 1" framed double leaf sliding door with 10mm glass insert
- Ceiling Height: 80" - 120", in 1/16" increments
- Available in 78" and 84" nominal widths with clear openings of 67-7/8" and 73-7/8" respectively
- Rail Orientation: Exterior or Interior
- Hardware Prep: Linear or Ladder Pull
- Frame Finish: Clear Anodized or Painted
- Glass Type: Tempered Only
- Glass Finish: Clear or Clear Low Iron
- Brush Seal Standard



### Double Leaf Sliding Door Jamb Kit (FVDUSJ)

- Universal sliding door frame works with double leaf, cut to height on site and is not specific to hardware or orientation
- Consists of two back jambs and two adjustable top rails which are spliced together (166-1/2" fixed length)
- 78" and 84" nominal widths (door module)
- Includes soft open / soft close mechanism as standard
- Finishes: Clear Anodized or Painted




### Sliding Door Jamb Connection (FVDJBC)

- Configurable kit of parts that connects jambs of sliding door to adjacent wall conditions
- Front Jamb Conditions: 10mm or 12mm glass, Corner/Fly-by Transition, Door Start/Articulating
- Back Jamb Conditions: 10mm or 12mm glass
- Finishes: Clear Anodized or Painted

# planning with sliding door programs

The following describes how the sliding door frame and leaf interface with the wall program, ceiling and finished floor.

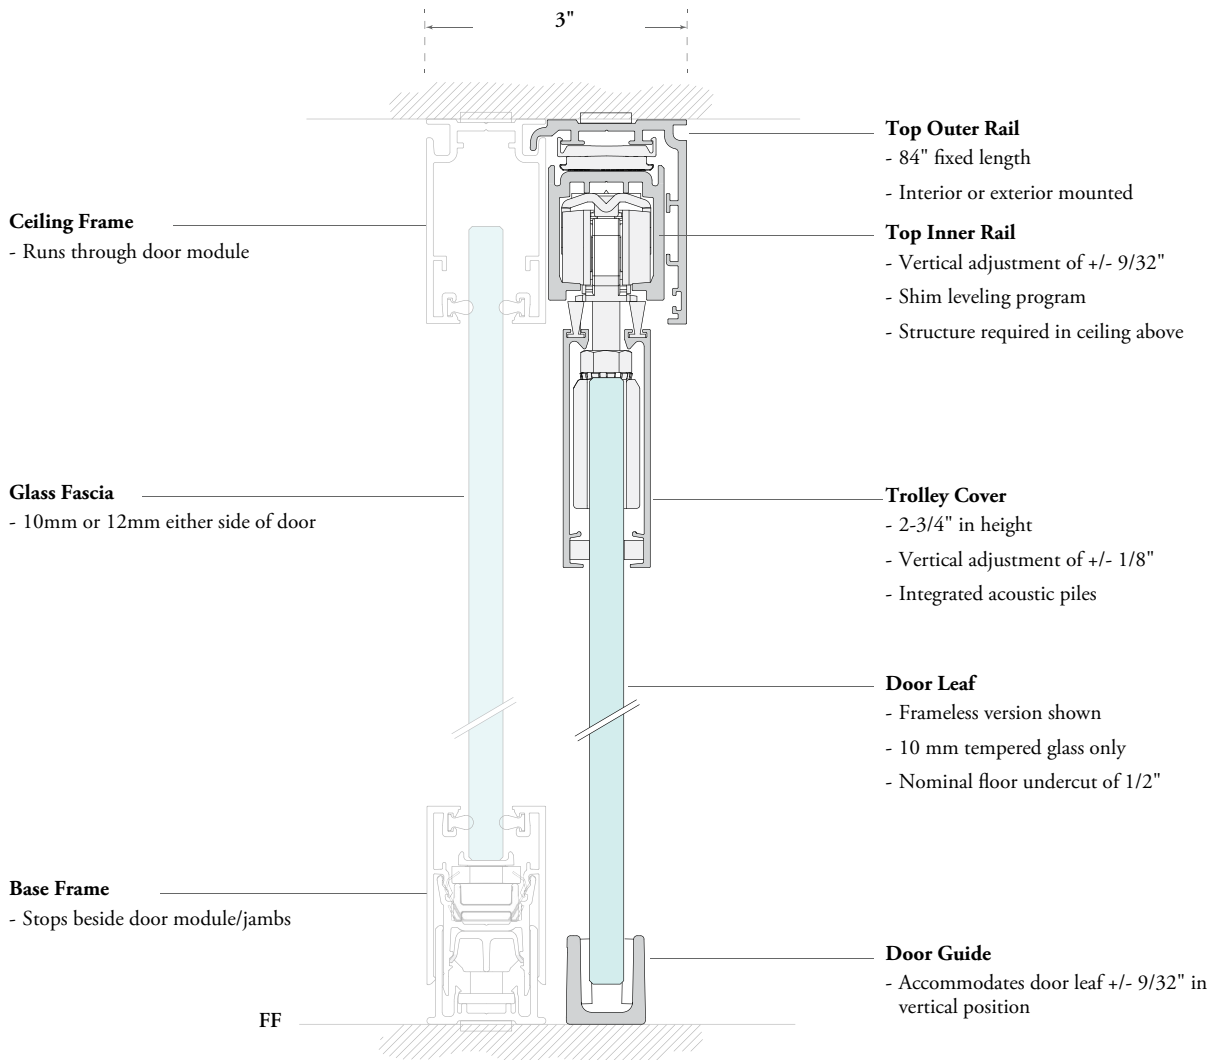

Vertical Section View

## planning with sliding door programs (continued)

The following describes additional details and features of the sliding door program.

### Inner Jamb Trim


- Ships with door leaf
- Cut to size on site

### Front Jamb


- Part of universal door frame
- Includes foam gasket seals for glass
- Cut to size on site

### Back Jamb

- Part of universal door frame
- Includes foam gaskets for glass & brush seal
- Cut to size on site

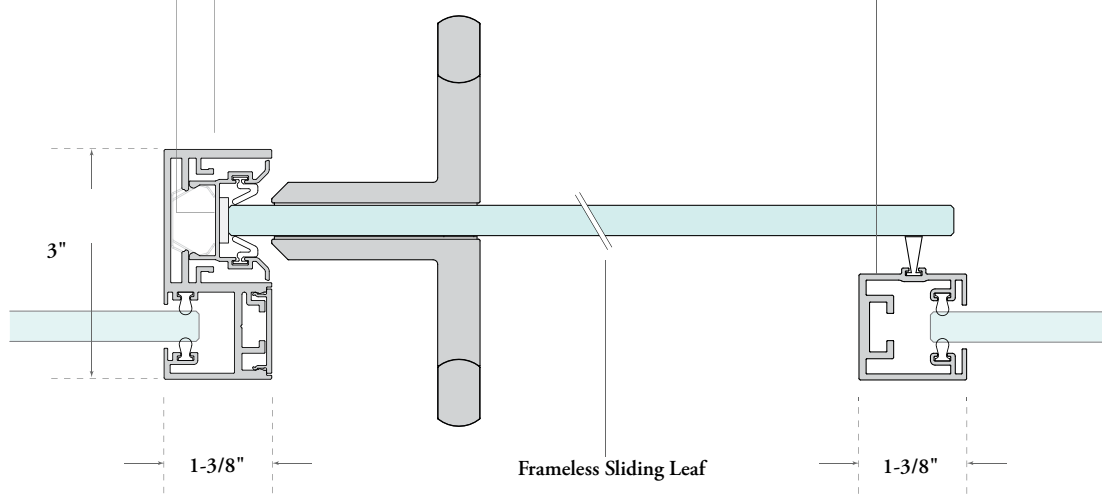




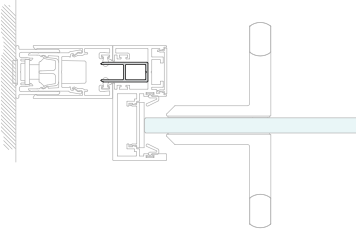
Horizontal Section View

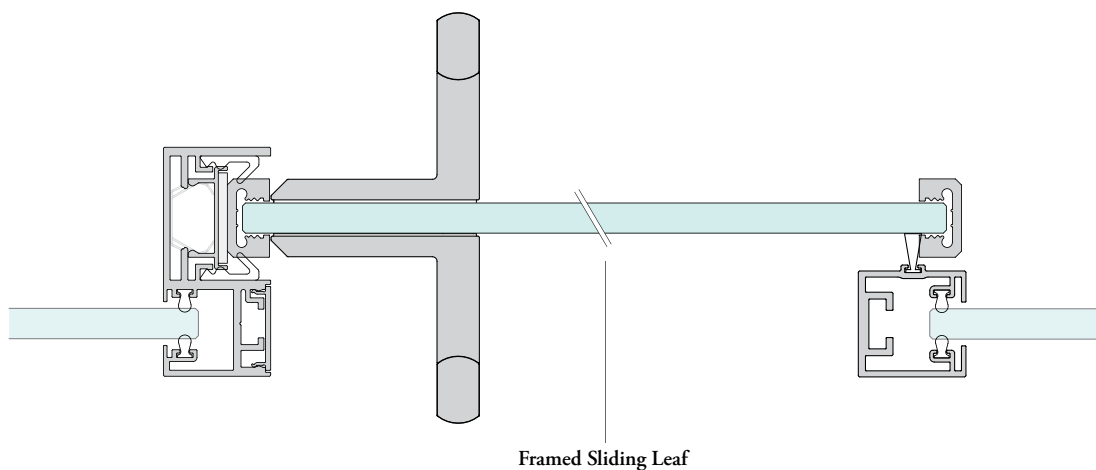

# planning with sliding door jamb connections

The sliding door jamb connection is configurable kit of parts that connects jambs of a sliding door to adjacent wall conditions.

Below describes the front and back jamb conditions that can be specified and the restrictions that exist.



Sliding Door Jamb Connection (FVDJBC)	Front Jamb	Back Jamb	Restrictions
10mm or 12mm glass			Each side of door must be specified with same glass thickness (10mm or 12mm)
Corner or Fly-By Transitions			
Door Start or Articulating			





# planning with interior mounted sliding door rails

The following describes the features and restrictions when planning with interior mounted sliding door rails.

- The rail must not interfere with demising walls and vertical elements ('on-module approach')
- The rail is hidden inside the office creating a clean storefront aesthetic
- The rail is 80" (for 40" nominal door) and 84" (for 42" nominal door) fixed length for single leaf and 154-1/2" (for 78" nominal door) and 166-1/2" (for 84" nominal door) fixed length for double leaf
- The examples shown below are for the 40" single and the 78" double nominal door sizes.

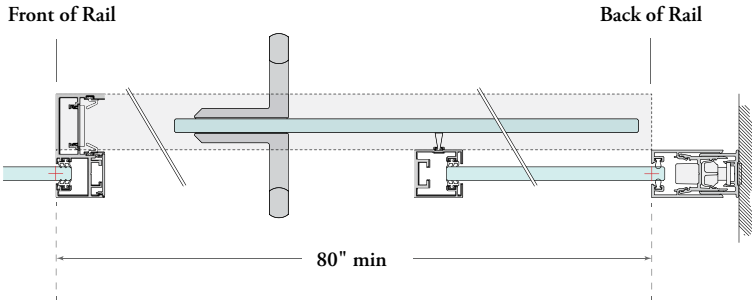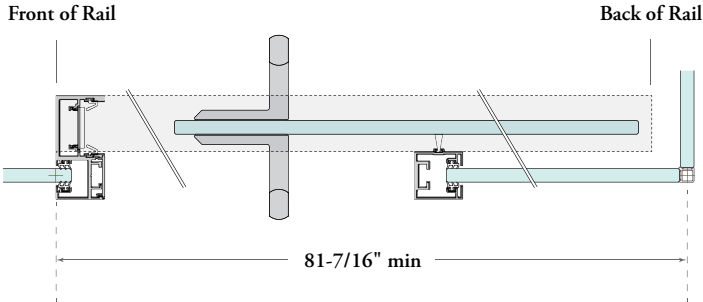Wall Condition at Back of Rail	Interior Mounted Rail (Single Leaf)
<b>Verticals:</b> <ul style="list-style-type: none"><li>- Wall Start</li><li>- Transitions</li></ul>	
<b>Glass Corners:</b> <ul style="list-style-type: none"><li>- 90°</li><li>- Three-Way</li><li>- Four-Way</li><li>- Variable Angle</li></ul>	





# planning with interior mounted sliding door rails (continued)

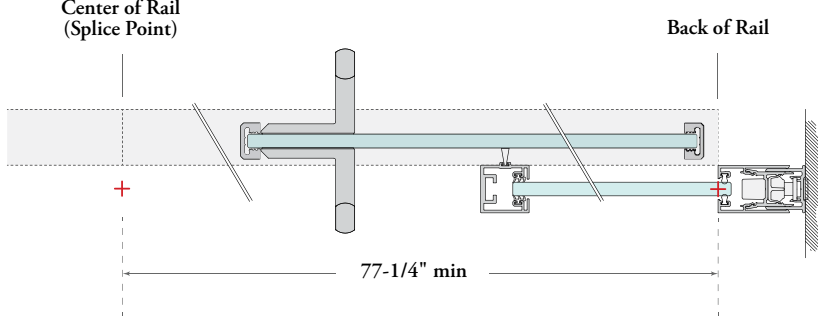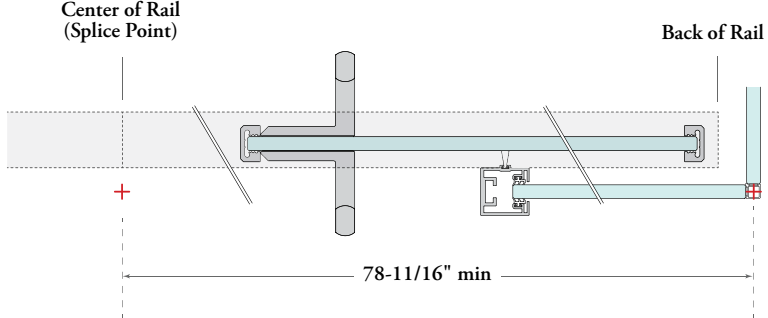Wall Condition at Back of Rail	Interior Mounted Rail (Double Leaf)
<b>Verticals:</b> - Wall Start - Transitions	
<b>Glass Corners:</b> - 90° - Three-Way - Four-Way - Variable Angle	





planning with exterior mounted sliding door rails

The following describes the features and restrictions when planning with exterior mounted sliding door rails;

- The rail can overlap three-way glass storefront corners for space saving opportunities ('off-module approach')
- The rail is visible on the storefront and avoids any potential interference issues with interior planned furniture
- The rail is 80" (for 40" nominal door) and 84" (for 42" nominal door) fixed length for single leaf and 154-1/2" (for 78" nominal door) and 166-1/2" (for 84" nominal door) fixed length for double leaf
- The examples shown below are for the 40" single and the 78" double nominal door sizes.

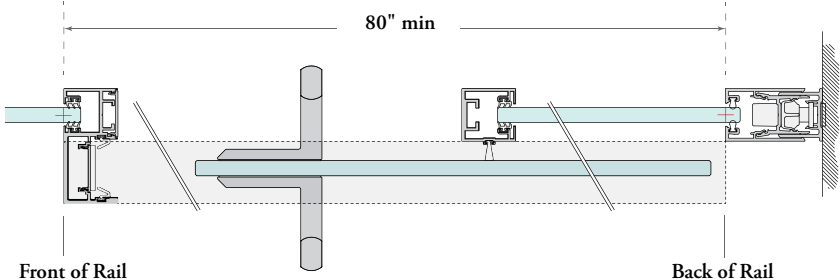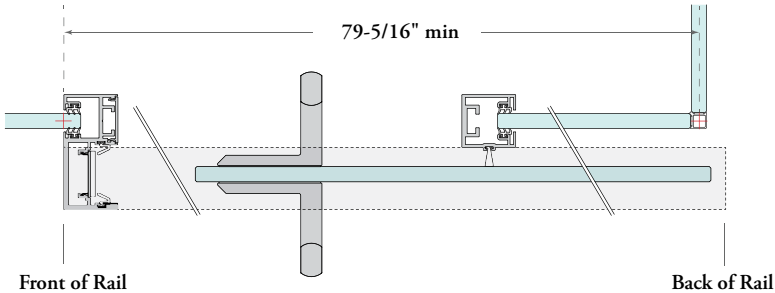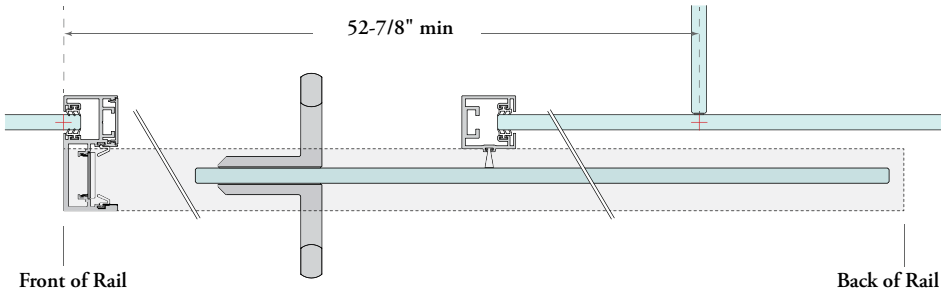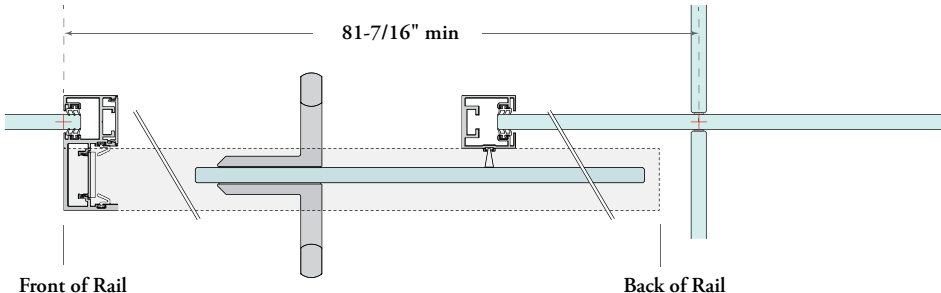Wall Condition at Back of Rail	Exterior Mounted Rail (Single Leaf)
<b>Verticals:</b> - Wall Start - Transitions	
<b>90° Glass Corner</b>	
<b>Three-Way Glass Corner</b>	
<b>Four-Way or Variable Angle Glass Corner</b>	

# planning with exterior mounted sliding door rails (continued)

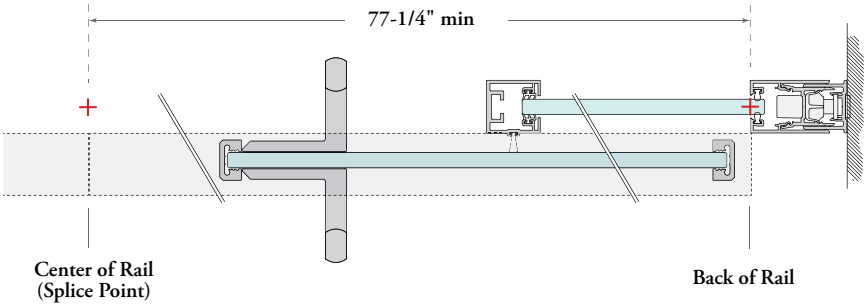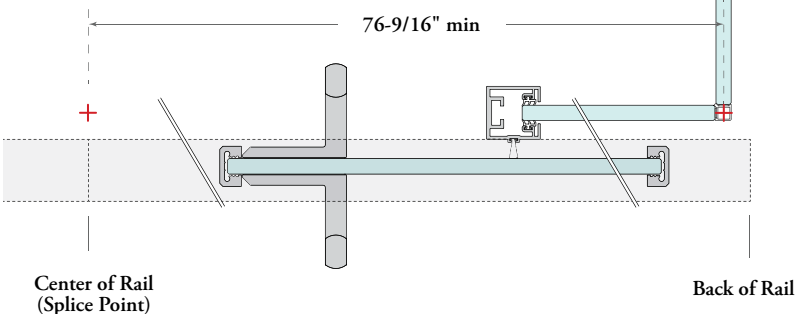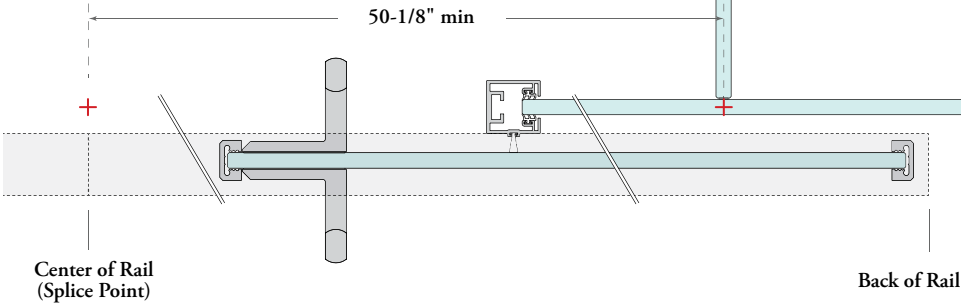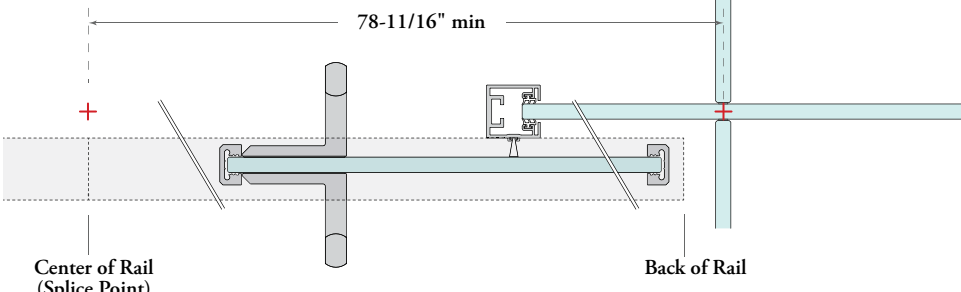
Wall Condition at Back of Rail	Exterior Mounted Rail (Double Leaf)
<b>Verticals:</b> - Wall Start - Transitions	 <p>77-1/4" min</p> <p>Center of Rail (Splice Point)</p> <p>Back of Rail</p>
90° Glass Corner	 <p>76-9/16" min</p> <p>Center of Rail (Splice Point)</p> <p>Back of Rail</p>
Three-Way Glass Corner	 <p>50-1/8" min</p> <p>Center of Rail (Splice Point)</p> <p>Back of Rail</p>
Four-Way or Variable Angle Glass Corner	 <p>78-11/16" min</p> <p>Center of Rail (Splice Point)</p> <p>Back of Rail</p>

## planning with sliding door rails


**The following information must be taken into consideration when planning and specifying the sliding door.**

- Additional ceiling structure is required to accommodate the top rail of the sliding door. This is due to the absence of a third post in the door frame design
- In drywall ceiling and bulkhead conditions, the structure above the ceiling is the responsibility of the General Contractor and must be installed in advance
- In suspended ceiling conditions, consult with a Teknion representative regarding the specific structure required above the ceiling
- Below are general diagrams of the types of structure required. Note: specific structural requirements will be dependent on each building condition. Review with a Teknion representative if required.


### drywall ceiling with wood structure

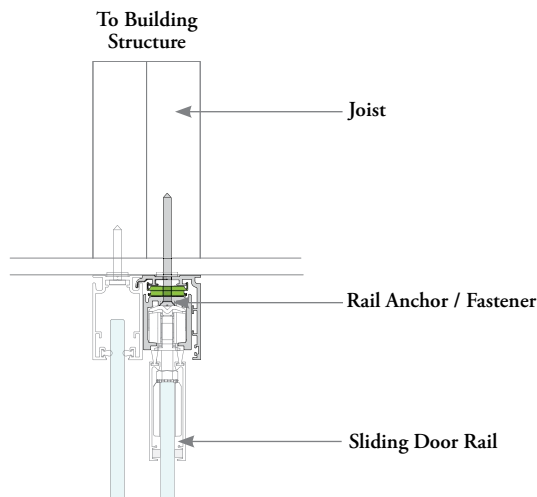

### suspended ceiling with steel framing

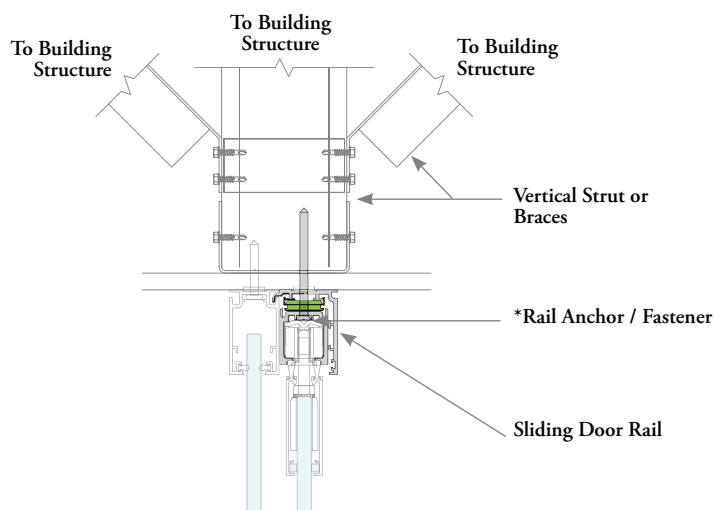



### suspended ceiling with steel framing & cables

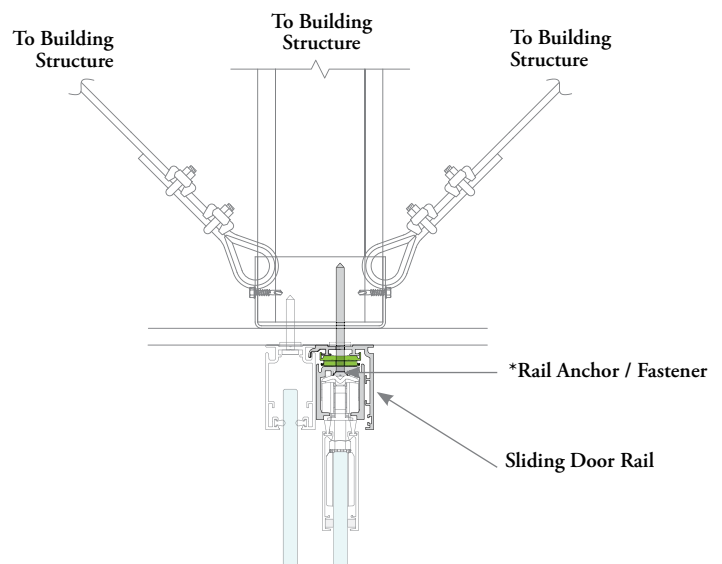

#### Note for Rail Anchor / Fastener:


- Applied every 12" along rail length
- Applied directly through leveling shims
- Each anchor / fastener must support 100 lbs of force

The following outlines the egress hardware available on the pivot and sliding door programs;

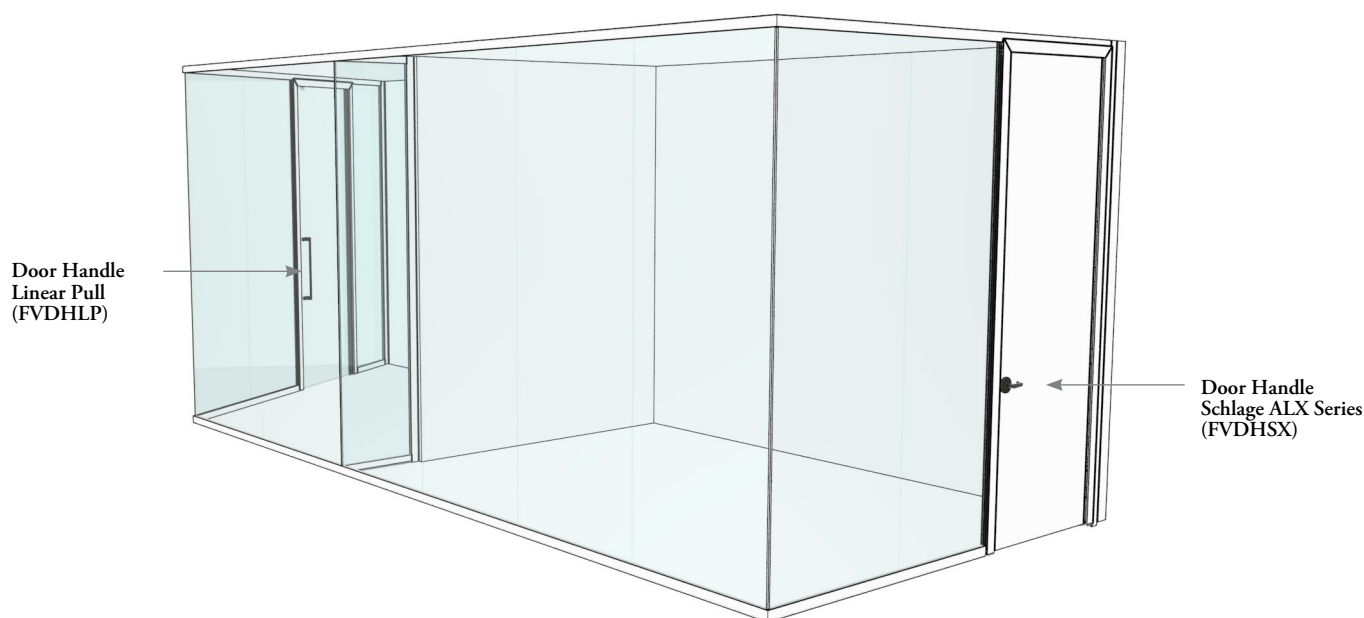


#### Door Handle Ceiling Pull (FVDSCP)

- Tubular steel pull
- Compatible with pivot and sliding doors
- Compatible with single glazed and solid leaf
- Non-locking and Locking options
- Configurable to ceiling heights 86"-120", in 1" increments
- Finishes: Stainless or Painted
- Interior or Exterior option for sliding door rail
- Cylinder finishes: Black or satin chrome (Finishes changes according to color coordination chart, driven by component finish)
- Thumbturn Finishes: Black or satin chrome (Finishes changes according to color coordination chart, driven by component finish)




#### Door Handle Floor Pull (FVDSFP)

- Tubular steel pull
- Non-locking; compatible with sliding doors
- Locking; compatible with sliding doors
- Finishes: Stainless or Matte Black



#### Door Handle Linear Pull (FVDHLP)

- Square aluminum pull
- Compatible with pivot and sliding doors
- Compatible with single glazed and solid leaf
- Non-locking only
- Lengths: 13" or 24"
- Finishes: Textured AC or Painted









#### Door Handle Schlage ALX Series (FVDHSX)

- Cylindrical lock set
- Compatible with pivot doors only
- Compatible with single glazed and solid leaf
- Non-locking and Locking options
- Lever Finishes: Satin Chrome and Matte Black
- Patch Finishes: Clear Anodized or Painted
- Strike Plate Finish: color coordinated with lever
- Rhodes/Athens lever available
- Dummy handle on the inactive door on double leaf pivot / hinged doors

## planning with hardware

The following describes further details and restrictions of egress hardware available on the pivot and sliding door programs.

Egress hardware is a configurable kit of parts that is always specified separately from the door leaf.



		 	 	
		<b>Non-Locking</b> <b>Locking (with patch)</b>	<b>Non-Locking</b> <b>Locking</b>	
<b>Product Code</b>	FVDHLP	FVDSCP	FVDSFP	FVDHSX
<b>Series</b>	Linear Pull	Ladder Pull	Floor Pull	ALX Series (Cylindrical Lock set)
<b>Supplier</b>	Teknion	Teknion	Standard Metal Hardware	Schlage
<b>Lever/Pull Type</b>	Square Aluminum Pull	Tubular Steel Pull (1" diameter)	1-3/8" Tubular steel pull Lock integrated in pull	Rhodes and Athens Lever
<b>Pivot Door Compatibility</b>	Yes	Non-locking only	No	Yes
<b>Sliding Door Compatibility</b>	Yes	Yes	Yes	N/A
<b>Length Options</b>	13" or 24"	Configurable to ceiling heights 86"-120" in 1" increments	48"	N/A
<b>Height AFF</b>	34-5/8" from bottom of pull	Non-Locking: 40-5/16" from bottom of pull (nominal value) Locking: 36-1/2" from CL of cylinder (nominal value)	48-1/2" from finished floor to top of pull	39-5/8" from CL of lever
<b>Lock Function Details</b>	Non-Locking only	Locking Option: Keyed outside, manual thumb turn inside Non-Locking Option	Locking option Keyed outside, manual ADA thumb turn Inside	Locking Option: Entrance/Office (keyed outside, push button inside) Non-Locking Option: Passage Latch
<b>Code Compliance</b>	ADA compliant	ADA compliant	Not ADA compliant	ADA compliant
<b>Cylinder &amp; Core Details</b>	N/A	Full Size Interchangeable Core (FSIC) cylinder six pin	Full Size Interchangeable Core (FSIC) Rim Cylinder	Full Size Interchangeable Core (FSIC) cylinder six pin
<b>Lever / Pull Finish Options</b>	Clear Anodized Can match all standard paint finishes	Stainless Can match all standard paint finishes	Stainless Steel ANSI / BHMA 630, US32D or Painted Matte Black	Satin Chrome and Matte Black (strike plate color coordinated with lever)
<b>Patch Cover Details</b>	N/A	Die cast zinc construction Stainless or Painted	N/A	Machined aluminum construction Clear Anodized or Painted

- Pull finishes should be specified to match door leaf finish
- Patch finishes are driven by door leaf finish
- Doors specified with "interchangeable core cylinder" are keyed randomly (two keys provided per door) but can be removed by a universal control
- After installation, customers may chose to relocate or replace interchangeable core cylinders to suit their security need

# application guide


## accessories & electrics basics

Below describes additional accessory and electrical components offered within Tek Vue.

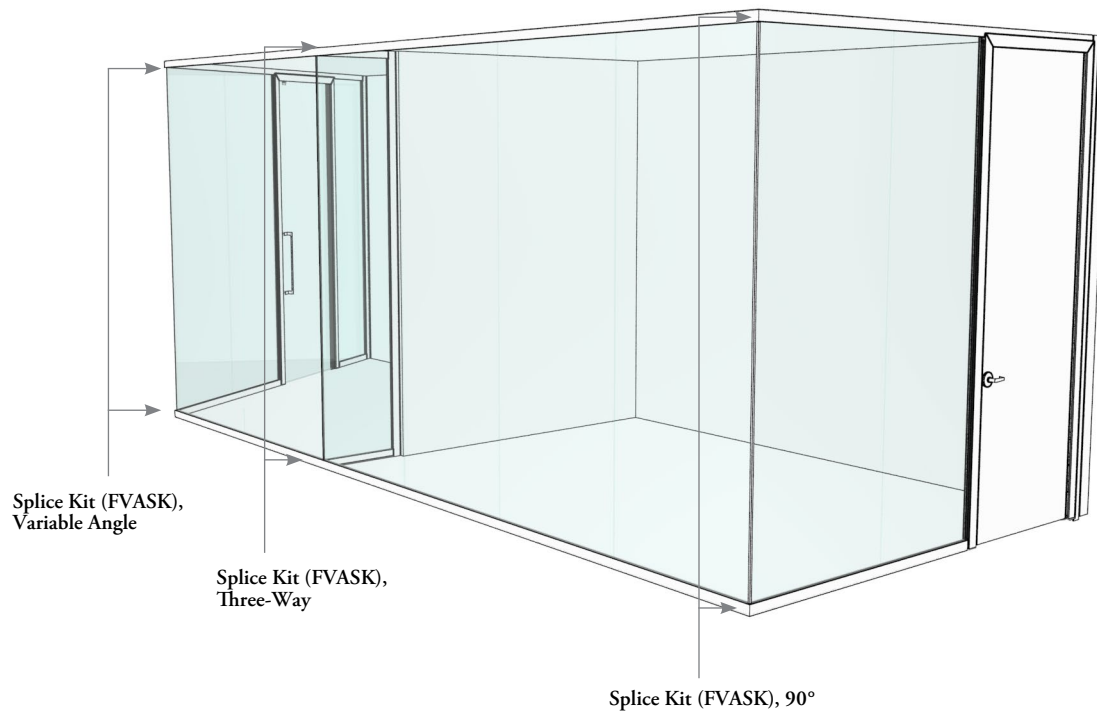


### Splice Kit (FVASK)

- Configurable splice kit for horizontal framing
- Configurations: Inline, 90°, Three-Way, Four-Way or Variable Angle
- One splice kit per framing seam (base and ceiling included)




### Ceiling Support (FVACS)

- Support for ceiling frame (in suspended ceiling conditions)



### Low Profile Light Switch (FVALS)

- Color: Black, White or Grey




### Low Profile Receptacle Module (FVARM)

- Color: Black, White or Grey
- Amperage: 15 or 20 Amps



### Glass Applicator Kit (FVAAK)

- Kit for glass cleaning before install
- One applicator kit covers approximately 48 pieces of 10mm glass or 36 pieces of 12mm glass (at maximum 120" ceiling height)




### Frame Cut Fixture (FVAFF)

- Fixture for cutting base frame components in one operation
- Can be used with ceiling frame, wall starts and door starts if required



### Control Key (FVKK)

- Used to remove or install an interchangeable core



### Curved Wall Template (FVCWT)

- Used to aid in the accurate positioning and end cutting of the curved base and ceiling frame assembly



# teknion

[www.teknion.com](http://www.teknion.com)

IN CANADA:

1150 Flint Road  
Toronto, Ontario  
M3J 2J5 Canada  
Tel 866.teknion  
866.835.6466

IN THE USA:

350 Fellowship Road  
Mt Laurel, New Jersey  
08054 USA  
Tel 877.teknion  
877.835.6466

OTHER OFFICES LOCATED IN:

Europe, South and Central America  
Middle East, Asia and Russia  
For regional contact information  
go to [www.teknion.com](http://www.teknion.com)

CAN/US/INT 09-23

©Teknion 2024

®, ™ trade marks of Teknion  
Corporation and/or its subsidiaries or  
licensed to it. Patents may be pending.

Some products may not be available  
in all markets. Contact your  
local Teknion Representative for  
availability.

SEP24-TEKVUE-PG