

Promenade® II Two-Piece Toilet, 1.0GPF

FEATURES

- TORNADO FLUSH® system, high-efficiency (1.0GPF/3.8LPF)
- CEFIONTECT® glaze prevents debris from sticking to ceramic surfaces, making them easier to clean
- ADA Compliant
- Universal Height
- Two-piece decorative high-profile toilet
- Chrome trip lever
- 12" Rough-in

MODELS

- CST404CUFG (#01, #03, #11, #12)
With CEFIONTECT ceramic glaze
- CST404CUF (#51)
Without CEFIONTECT
- CST404CUFRG (#01)
With CEFIONTECT and right-hand trip lever

COMPONENTS

- C404CUFG
Elongated bowl with CEFIONTECT
- C404CUF
Elongated bowl without CEFIONTECT
- ST403U
Tank and cover only
- ST403ER
Tank with right-hand trip lever and cover only
- SS224
SoftClose® seat (sold separately)

OPTIONAL COMPONENT

- THU466(#01, #BN, #CP, #PN, #MBL)
Trip Lever (Cotton, Brushed Nickel, Polished Nickel, Matte Black)

COLORS/FINISHES

- Standard
#01 Cotton
#03 Bone
#11 Colonial White
#12 Sedona Beige
#51 Ebony (without CEFIONTECT)

PRODUCT SPECIFICATION

The two-piece high-efficiency Tornado Flush system toilet shall be 1.0GPF/3.8LPF. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be universal height and ADA compliant when approached from trip lever side. CST404CUFG model shall have CEFIONTECT ceramic glaze. Toilet shall be TOTO Model CST404CUF_____.



1G One Gallon
Per Flush

CEFIONTECT

TORNADO FLUSH **U** Universal Height

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, Buy American Act (BAA)
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



CST404CUF(G)

Promenade® II Two-Piece Toilet, 1.0GPF


SPECIFICATIONS

Water Use	1.0 GPF/3.8LPF
Flush System	TORNADO FLUSH®
Min. Water Pressure	8 psi (static)
Water Surface	9" x 6-3/4"
Trap Diameter	2-1/8"
Rough-in	12"
Trap Seal	2-1/4"
Warranty	One Year Limited Warranty
Material	Vitreous china
Shipping Weight	C404CUF(G) - 60 lbs ST403U - 31.5 lbs
Shipping Dimensions	C404CUF(G) 29-3/4"L x 14-3/4"W ¹ x 12"W ² x 17-1/2"H ST403U 18"L x 9"W x 16"H

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

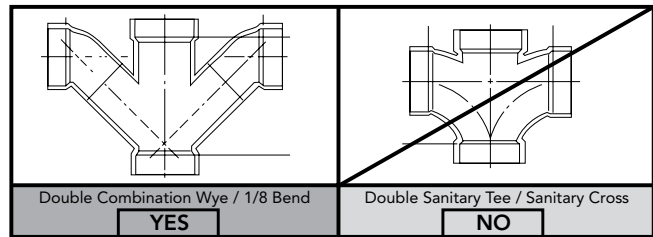

Ultra-low high efficiency toilets require a system with adequate supplemental flows from other water usage fixtures and a 4" ID drainline with minimum 2% slope and maximum linear runs of 60ft.

DIMENSIONS

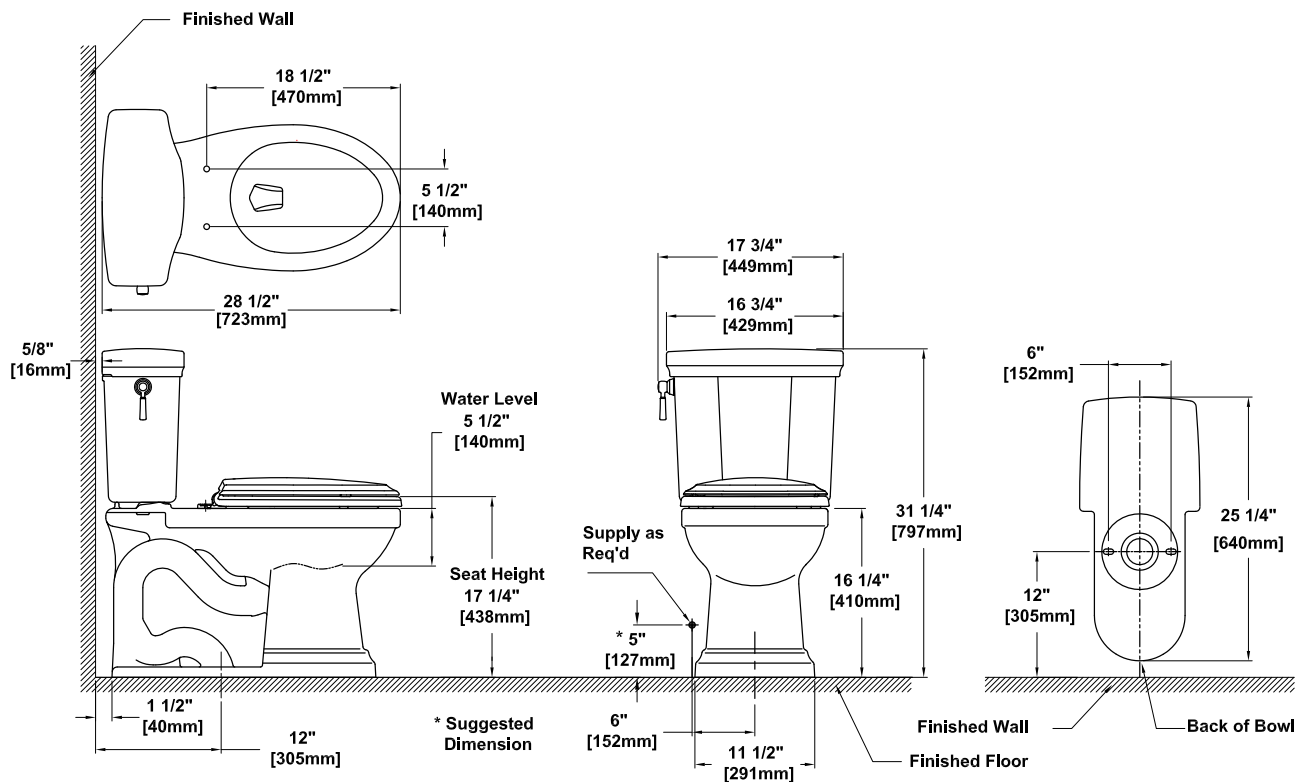

TOTO®

These dimensions and specifications are subject to change without notice