

TOTO® MS854114S(G)/MS853113S

UltraMax® One-Piece Toilet, 1.6GPF

FEATURES

- G-Max® flushing system, high efficiency (1.6GPF/6.0LPF)
- Optional CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces, leading to fewer chemicals.
- One-piece decorative toilet with high-profile tank
- Chrome trip lever
- Elongated front bowl with SoftClose® seat (SS114) or round front bowl with SoftClose seat (SS113)
- 12" Rough-in

MODELS

- **MS854114SG**
Elongated bowl with CEFIONTECT and SoftClose seat (SS114)
- **MS854114S**
Elongated bowl with SoftClose seat (SS114)
- **MS853113S**
Round bowl with SoftClose seat (SS113)

OPTIONAL COMPONENTS

- **THU808#(01, 03, 11, 12, 51, BN, PN, PB, RB, MBL)-A**
Trip Lever - Cotton, Bone, Colonial White, Sedona Beige, Ebony, Brushed Nickel, Polished Nickel, Polished Brass, Oil Rubbed Bronze, Matte Black

COLORS/FINISHES

- Standard
#01 Cotton
#03 Bone
#11 Colonial White
#12 Sedona Beige

PRODUCT SPECIFICATION

The one-piece high efficiency G-Max flushing system toilet shall be 1.6GPF/6.0LPF. Toilet shall be of elongated front bowl (MS854) or round front bowl (MS853) with a low-profile tank and SoftClose seat. Toilet shall have chrome trip lever. Toilet shall have optional CeFiONtect ceramic glaze. Toilet shall be TOTO Model MS85_____.



 **CEFIONTECT**

 **G-Max**

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others



MS854114S(G)/MS853113S

UltraMax® One-Piece Toilet, 1.6GPF


SPECIFICATIONS

- Water Use 1.6 GPF/6.0LPF
- Flush System G-Max®
- Min. Water Pressure 8 psi (static)
- Water Surface 10-1/4" x 8-1/4"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-3/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight MS854114S(G) 93 lbs.
MS853113S(G) 91 lbs.
- Shipping Dimensions 29-3/4" L x 18-1/8" W x
28-3/4" H¹ x 20-1/2" H²


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

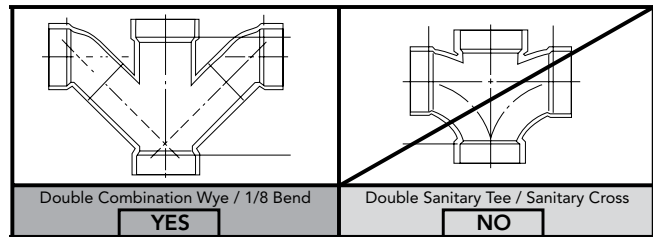

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

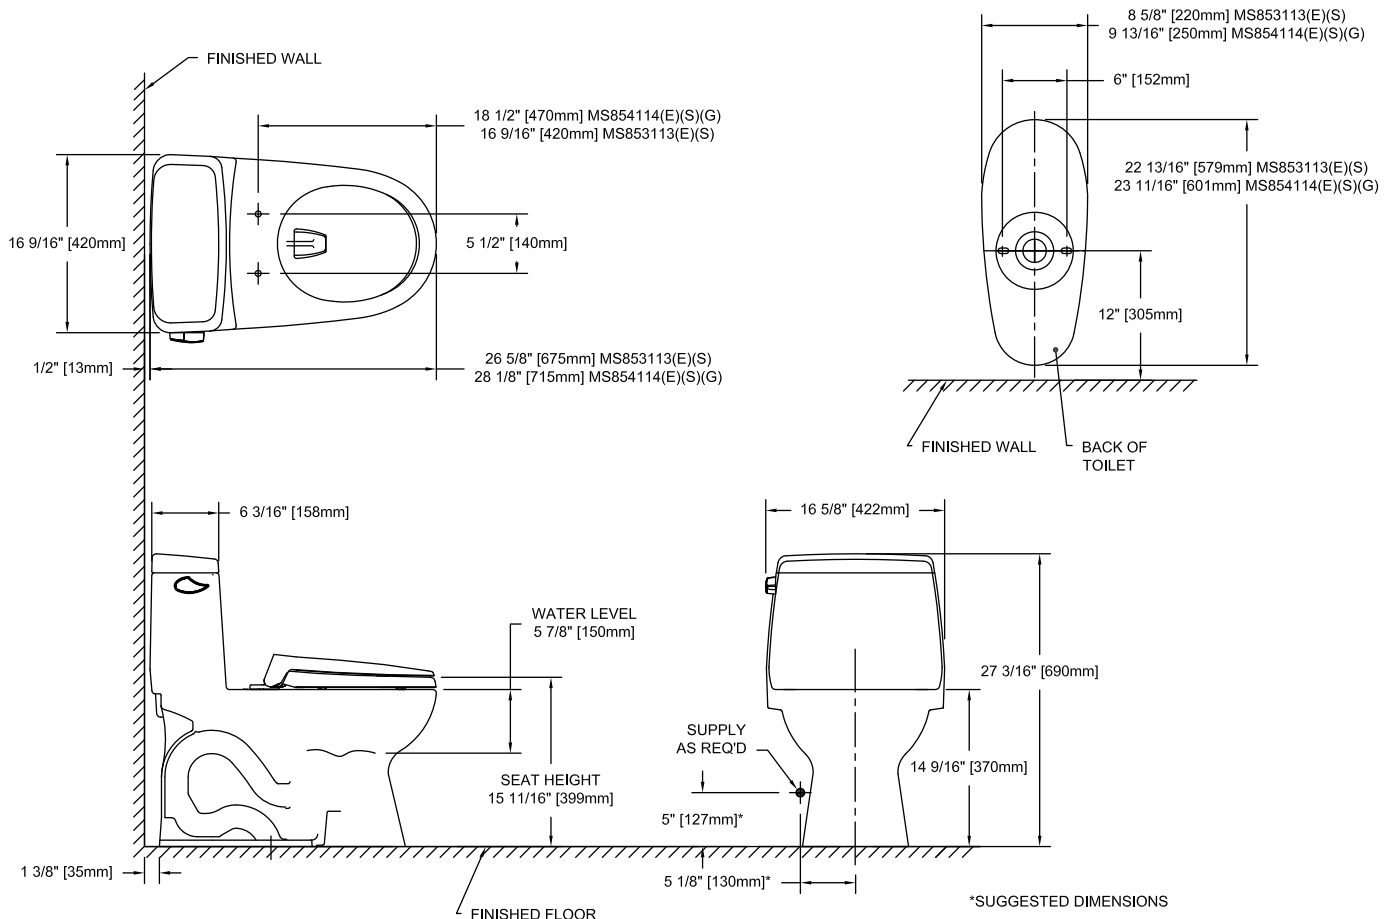

TOTO®

These dimensions and specifications are subject to change without notice