



TX:Style Collection

Mannington
COMMERCIAL



Cover: A La Mode (Modular) - Spruce 43288, **Installation** - Vertical Ashlar
Above: Bark II (Modular) - Spruce 43288, **Installation** - Brick Horizontal Ashlar



Above: Bark II (Broadloom) - Spruce 43288



Canopy II (Modular) - Spruce 43288
Installation - Brick Horizontal Ashlar



Canopy II (Broadloom) - Spruce 43288



Squareberry II (Modular) - Spruce 43288 (500 sq yd minimum)
Installation - Brick Horizontal Ashlar




Squareberry II (Broadloom) - Spruce 43288 (500 sq yd minimum)

TX:Style Inspiration

The tx:style design challenge was the first of its kind: an open invitation to the A+D community to think creatively about what sort of products they would love to see in the market. They then went to work with Mannington Commercial to make those products a reality.

In four years, more than 2,000 designers uploaded concepts for new flooring collections, and more than 700,000 votes were cast selecting favorites. Every year, finalists were chosen based on public votes, and brought to Mannington for a two-day workshop with our product development team. The grand

prize winners, selected at NeoCon, saw their concepts translated into products. Creating a new platform for creativity and peer to peer design, and giving the design community the power to engage with products they want.

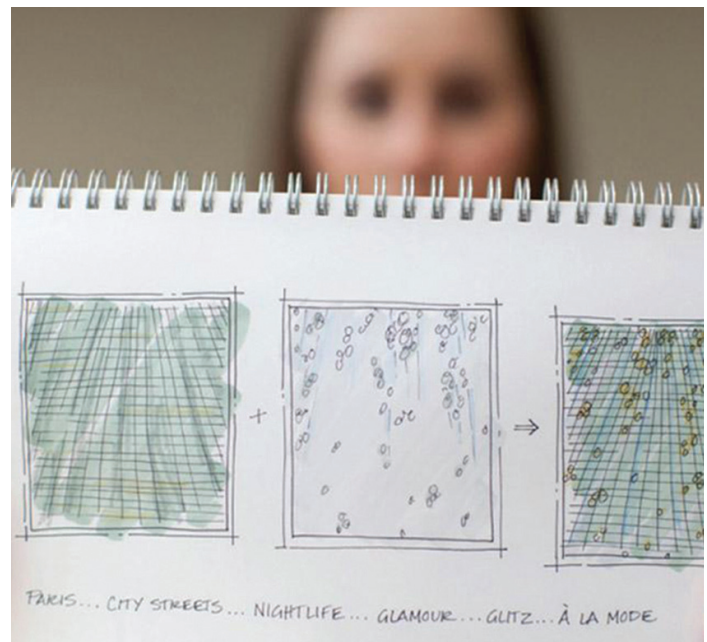

Squareberry II, by Meagan Webb
Inspired by the perfect design of details in natural landscapes.
Combining simple forms with a geometric grid, in delicate rhythm.



A la Mode, by Sara Meier
An abstract design that alludes to the glitz and glamour of fashion; with multiple pattern layers translating into a contemporary, organic visual.

Crafted with Purpose.

TX:Style Collection

Style	A La Mode (Modular)	Bark II (Modular)
Construction	Patterned Loop	Tip-Sheared Patterned Loop
Face Fiber	Type 6,6 Nylon	Type 6,6 Nylon
Dye Method	Yarn/Solution	Yarn/Solution
Guage	5/64	5/64
Stitches Per Inch	10.66 (41.97 per 10 cm)	11.5 (45.28 per 10cm)
Density	5,781 (214.81 kg/m³)	6,646 (246.95 kg/m³)
Pile Thickness	0.137" (3.48 mm)	0.130" (3.30 mm)
Weight	22 oz/yd² (746 g/m²)	24 oz/yd² (814 g/m²)
Backing Type	Infinity® 2 Modular	Infinity® 2 Modular
Sizes	24" x 24" (60.96 x 60.96 cm)	24" x 24" (60.96 x 60.96 cm)
Colors	16	16
Packaging	8 yd² / 18 Tiles	8 yd² / 18 Tiles
Adhesive	Infinity 2 Adhesive	Infinity 2 Adhesive
Installation Method	Vertical Ashlar	Horizontal Brick Ashlar
Testing		
Dimensional Stability (Aachen Test)	Passes	Passes
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV	Less than 3.0 kV
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm²	Passes - Class 1; ≥ 0.45 watts/cm²
Smoke Density (ASTM E662)	Passes - ≤ 450	Passes - ≤ 450
Methenamine Pill Test (ASTM D2859)	Passes	Passes
Hexapod (ASTM D5252) TARR	3.5 - severe	3.5 - severe
Environmental Data		
NSF/ANSI 140 Certification	Infinity® 2 Modular - Gold	
Recycled Content	Contains recycled content	
Indoor Air Quality	CRI Green Label Plus Certified	
Product Declarations	Third Party Verified EPD, HPD	
Carbon Offset	105% Cradle to Gate (A1 - A3), visit website for more information	
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials	
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information	
Manufacturing	Calhoun, GA (USA) - ISO 14001 Registered	
Warranty		
	Limited Lifetime Wear & Backing Warranty Limited 15-Year XGUARD® Stain Resistant Warranty Limited 15-Year ColorSafe® Bleach Resistant Warranty	

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.

TX:Style Collection

Style	Canopy II (Modular)	Squareberry II (Modular)
Construction	Patterned Loop	Tip-Sheared Patterned Loop
Face Fiber	Type 6,6 Nylon	Type 6,6 Nylon
Dye Method	Yarn/Solution	Yarn/Solution
Guage	5/64	5/64
Stitches Per Inch	12.33 (48.54 per 10 cm)	12 (47.24 per 10 cm)
Density	6,711 (249.37 kg/m³)	6,133 (227.89 kg/m³)
Pile Thickness	0.118" (3.00 mm)	0.135" (3.43 mm)
Weight	22 oz/yd² (746 g/m²)	0.135" (3.43 mm)
Backing Type	Infinity® 2 Modular	Infinity® 2 Modular
Sizes	24" x 24" (60.96 x 60.96 cm)	24" x 24" (60.96 x 60.96 cm)
Colors	16	16
Packaging	8 yd² / 18 Tiles	8 yd² / 18 Tiles
Adhesive	Infinity 2 Adhesive	Infinity 2 Adhesive
Installation Method	Horizontal Brick Ashlar	Horizontal Brick Ashlar
Testing		
Dimensional Stability (Aachen Test)	Passes	Passes
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV	Less than 3.0 kV
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm²	Passes - Class 1; ≥ 0.45 watts/cm²
Smoke Density (ASTM E662)	Passes - ≤ 450	Passes - ≤ 450
Methenamine Pill Test (ASTM D2859)	Passes	Passes
Hexapod (ASTM D5252) TARR	3.5 - severe	4.0 - severe
Environmental Data		
NSF/ANSI 140 Certification	Infinity® 2 Modular - Gold	
Recycled Content	Contains recycled content	
Indoor Air Quality	CRI Green Label Plus Certified	
Product Declarations	Third Party Verified EPD, HPD	
Carbon Offset	105% Cradle to Gate (A1 - A3), visit website for more information	
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials	
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information	
Manufacturing	Calhoun, GA (USA) - ISO 14001 Registered	
Warranty		
	Limited Lifetime Wear & Backing Warranty Limited 15-Year XGUARD® Stain Resistant Warranty Limited 15-Year ColorSafe® Bleach Resistant Warranty	

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.

TX:Style Collection

Style	Bark II (Broadloom)	Canopy II (Broadloom)	Squareberry II (Broadloom)
Construction	Tip-Sheared Patterned Loop	Patterned Loop	Tip-Sheared Patterned Loop
Face Fiber	Type 6,6 Nylon	Type 6,6 Nylon	Type 6,6 Nylon
Dye Method	Yarn/Solution	Yarn/Solution	Yarn/Solution
Gauge	5/64	5/64	5/64
Stitches Per Inch	11.5 (45.28 per 10 cm)	12.33 (48.54 per 10 cm)	12 (47.24 per 10 cm)
Density	6,646 (246.95 kg/m³)	6,711 (249.37 kg/m³)	6,133 (227.89 kg/m³)
Pile Thickness	0.130" (3.30 mm)	0.118" (3.00 mm)	0.135" (3.43 mm)
Weight	24 oz/yd² (814 g/m²)	22 oz/yd² (746 g/m²)	23 oz/yd² (780 g/m²)
Backing Type	UltraBac® RE, Integra® HP	UltraBac® RE, Integra® HP	UltraBac® RE, Integra® HP
Size	12' 6" Width	12' 6" Width	12' 6" Width
Colors	16	16	16
Packaging	18 3/4" W x 21 1/4" L	18 3/4" W x 42 1/4" L	18 3/4" W x 19 1/2" L
Adhesive	Mannington Ultra Adhesive Mannington Integra-2 Adhesive	Mannington Ultra Adhesive Mannington Integra-2 Adhesive	Mannington Ultra Adhesive Mannington Integra-2 Adhesive
Testing			
Dimensional Stability (Aachen Test)	Passes	Passes	Passes
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV	Less than 3.0 kV	Less than 3.0 kV
Flooring Radiant Panel (ASTM E648)	Passes - Class 1 ≥ 0.45 watts/cm²	Passes - Class 1 ≥ 0.45 watts/cm²	Passes - Class 1 ≥ 0.45 watts/cm²
Smoke Density (ASTM E662)	Passes ≤ 450	Passes ≤ 450	Passes ≤ 450
Methenamine Pill Test (ASTM D2859)	Passes	Passes	Passes
Hexapod (ASTM D5252) TARR	3.5 - severe	3.5 - severe	3.5 - severe
Environmental Data			
NSF/ANSI 140 Certification	UltraBac® RE - Gold, Integra® HP - Gold		
Recycled Content	Contains recycled content		
Indoor Air Quality	CRI Green Label Plus Certified		
Product Declarations	Third Party Verified EPD, HPD		
Carbon Offset	105% Cradle to Gate (A1 - A3), visit website for more information		
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 -Low Emitting Materials		
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information		
Manufacturing	Calhoun, GA (USA) - ISO 14001 Registered		
Warranty			
	Limited Lifetime Wear & Backing Warranty Limited 15-Year XGUARD® Stain Resistant Warranty Limited 15-Year ColorSafe® Bleach Resistant Warranty		

• Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.

• Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.

• As with all quality carpets, slight variation in color may occur from dye lot to dye lot.

• Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.

• This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.

• The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.

• Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.