



All Star Collection

Mannington
COMMERCIAL



Cover: **Halftime** (Broadloom) - Cobb
Above: **Gametime III** (Broadloom) - Dean




Gametime III (Modulon) - Dean
Installation: Monolithia



Halftime (Modular) - Cobb
Installation - Monolithic

Proven by Third-Party Testing

All of our carpet products are third-party tested and proven to exceed industry standards in appearance retention, texture retention, fire safety factors and static generation, and our modular carpet exceeds industry standards in dimensional stability—so you can be sure that the carpet you specify will perform for years to come.

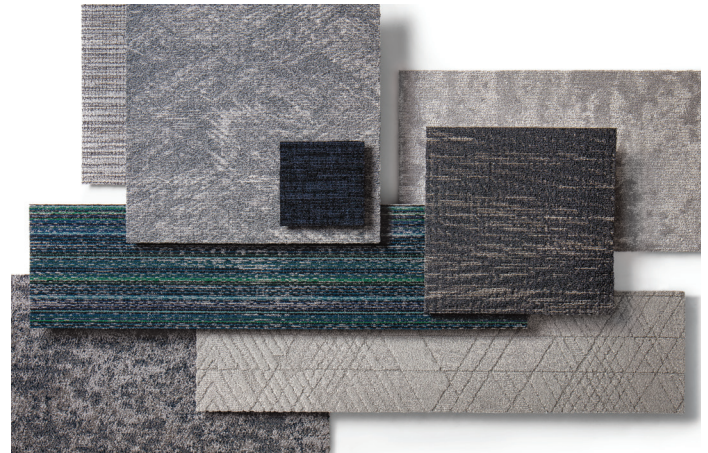

Easier to Maintain

- > The molecular strength of type 6,6 nylon delivers greater resilience against matting and resists abrasive wear, keeping carpet looking better longer.
- > XGUARD® Stain Resistant Technology provides long-term stain resistance for our space dye products.
- > ColorSafe® Bleach Resistant Technology resists color fade-out from bleach spills for our space dye products.
- > Moisture-barrier backings are built to withstand aggressive wet cleanings.

Backing Advantages

- > Infinity® 2 Modular backing provides exceptional performance with a moisture barrier and allows for installations in areas with up to 99% RH.
- > Infinity® 2 Modular backing offers superior tuft bind and dimensional stability with a limited lifetime warranty.
- > Infinity® 2 Modular backing offers superior tuft bind and dimensional stability with a limited lifetime warranty.

Sustainable Solutions

- > Supported with EPDs and HPDs.
- > Infinity® 2 Modular, UltraBac broadloom and Integra® HP broadloom backings are CRI Green Label Plus Certified, NSF/ANSI 140 Gold Certified and contain recycled content.

TARR

- > All Star carpet was specifically designed with a minimum of 3.0 TARR rating for use in environments with heavy foot traffic. This includes conference rooms, open offices and classrooms. Our TARR rating is tested and verified by an independent lab.

All Star Collection

Style	Gametime III 20 oz (Broadloom)	Gametime III 26 oz (Broadloom)	Gametime III 20 oz (Modular)
Construction	Tufted Texture Twist Loop	Tufted Texture Twist Loop	Textured Patterned Loop
Face Fiber	Type 6,6 Nylon	Type 6,6 Nylon	Type 6,6 Nylon
Dye Method	Solution/Yarn	Solution/Yarn	Solution/Yarn
Gauge	1/10 (39.37 per 10 cm)	1/10 (39.37 per 10 cm)	1/10 (39.37 per 10 cm)
Stitches Per Inch	6.33 (24.92 per 10 cm)	8.33 (32.08 per 10 cm)	6.33 (24.92 per 10 cm)
Density	8,372 (311.09 kg/m³)	7,865 (292.25 kg/m³)	8,372 (311.09 kg/m³)
Pile Thickness	0.086" (2.18 mm)	0.119" (3.02 mm)	0.086" (2.18 mm)
Weight	20 oz/yd² (678 g/m²)	26 oz/yd² (881 g/m²)	20 oz/yd² (678 g/m²)
Backing Type	Integra® HP, UltraBac® RE	Integra® HP, UltraBac® RE	Infinity® 2 Modular
Size	12' width (381 cm)	12' width (381 cm)	24" x 24" (60.96 x 60.96)
Colors	16	16	16
Packaging	N/A	N/A	8 yd² / 18 Tiles
Adhesive	Integra® HP - Integra 2 Adhesive UltraBac® RE - Ultra Adhesive	Integra® HP - Integra 2 Adhesive UltraBac® RE - Ultra Adhesive	Infinity® 2 Adhesive
Installation Method	N/A	N/A	Monolithic
Testing			
Dimensional Stability (Aachen Test)	Passes		
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV		
Flooring Radiant Panel (ASTM E648)	Passes - Class 1 ≥ 0.45 watts/cm²		
Smoke Density (ASTM E662)	Passes ≤ 450		
Methenamine Pill Test (ASTM D2859)	Passes		
Hexapod (ASTM D5252) TARR	3.0 - heavy	3.5 - severe	4.0 - severe
Environmental Data			
NSF/ANSI 140 Certification	Infinity® 2 Modular - Gold, UltraBac® RE - Gold, Integra® HP - Gold		
Recycled Content	Contains recycled content		
Indoor Air Quality	CRI Green Label Plus Certified		
Product Declarations	Third Party Verified EPD, HPD		
Carbon Offset	105% Cradle to Gate (A1 - A3), visit website for more information		
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 -Low Emitting Materials		
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information		
Manufacturing	Calhoun, GA (USA) - ISO 14001 Registered		
Warranty			
	Limited Lifetime Wear & Backing Warranty		
	Limited 15-Year XGUARD® Stain Resistant Warranty		
	Limited 15-Year ColorSafe® Bleach Resistant Warranty		

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.

All Star Collection

Style	Gametime III 26 oz (Modular)	Halftime (Broadloom)	Halftime (Modular)
Construction	Textured Patterned Loop	Textured Patterned Loop	Textured Patterned Loop
Face Fiber	Type 6,6 Nylon	Type 6,6 Nylon	Type 6,6 Nylon
Dye Method	Solution/Yarn	Solution/Yarn	Solution/Yarn
Gauge	1/10 (39.37 per 10 cm)	1/12 (47.24 per 10 cm)	1/12 (47.24 per 10 cm)
Stitches Per Inch	8.33 (32.08 per 10 cm)	7.0 (27.56 per 10 cm)	7.0 (27.56 per 10 cm)
Density	7,865 (292.25 kg/m³)	6,923 (257.24 kg/m³)	6,923 (257.24 kg/m³)
Pile Thickness	0.119" (3.02 mm)	0.104" (2.64 mm)	0.104" (2.64 mm)
Weight	26 oz/yd² (881 g/m²)	20 oz/yd² (678 g/m2)	20 oz/yd² (678 g/m2)
Backing Type	Infinity® 2 Modular	Integra® HP, UltraBac® RE	Infinity® 2 Modular
Size	24" x 24" (60.96 x 60.96 cm)	12' width (381 cm)	24" x 24" (60.96 x 60.96)
Colors	16	16	16
Packaging	8 yd² / 18 Tiles	N/A	8 yd² / 18 Tiles
Adhesive	Infinity® 2 Adhesive	Integra® HP - Integra 2 Adhesive UltraBac® RE - Ultra Adhesive	Infinity® 2 Adhesive
Installation Method	Monolithic	N/A	Monolithic
Testing			
Dimensional Stability (Aachen Test)	Passes		
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV		
Flooring Radiant Panel (ASTM E648)	Passes - Class 1 ≥ 0.45 watts/cm²		
Smoke Density (ASTM E662)	Passes ≤ 450		
Methenamine Pill Test (ASTM D2859)	Passes		
Hexapod (ASTM D5252) TARR	3.0 - heavy	3.5 - severe	4.0 - severe
Environmental Data			
NSF/ANSI 140 Certification	Infinity® 2 Modular - Gold, UltraBac® RE - Gold, Integra® HP - Gold		
Recycled Content	Contains recycled content		
Indoor Air Quality	CRI Green Label Plus Certified		
Product Declarations	Third Party Verified EPD, HPD		
Carbon Offset	105% Cradle to Gate (A1 - A3), visit website for more information		
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 -Low Emitting Materials		
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information		
Manufacturing	Calhoun, GA (USA) - ISO 14001 Registered		
Warranty			
	Limited Lifetime Wear & Backing Warranty		
	Limited 15-Year XGUARD® Stain Resistant Warranty		
	Limited 15-Year ColorSafe® Bleach Resistant Warranty		

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.