

**S19-120P****Drench Shower w/Hose Spray and Horizontal Supply**

- Exceeds American National Standard Z358.1 Specifications
- Easily Mounts to Wall
- Galvanized Steel Protected with BradTect® Safety Yellow Coating
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- Classified by Underwriters Laboratory Inc. to ANSI Z358.1
- SpinTec™ showerheads are covered by one or more of the following patents: 8113446; D594,089; D669,555; Reg. Comm. Des. D001079560-0001. Other patents pending.
- Classified by Underwriters Laboratory Inc. to ANSI Z358.1

**Specifications**



Impact-resistant plastic showerhead is colored bright yellow for high visibility in emergency situations. Shower provides a superior washdown with a more even spray pattern. Shower pull rod is stainless steel. Galvanized steel piping is additionally protected with BradTect® safety yellow coating. Hand-held hose sprayhead contains an antimicrobial agent to protect the sprayhead.

*Installer to supply backflow prevention as required by UPC, IPC and/or local plumbing coded. Contact Bradley or visit [bradleycorp.com](http://bradleycorp.com) for available options.*

*Drench shower is designed to accommodate standard 8' ceiling height. ANSI Z358.1 compliant drench showers are mounted between 82"-96" from the lower edge of the showerhead or shroud to the floor.*

*This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.*


| Model           | Description   |
|-----------------|---|
| <b>S19-120P</b> | Drench Shower w/Hose Spray and Horizontal Supply      |
| <b>S19-2150</b> | Navigator EFX20 - Emergency Thermostatic Mixing Valve |

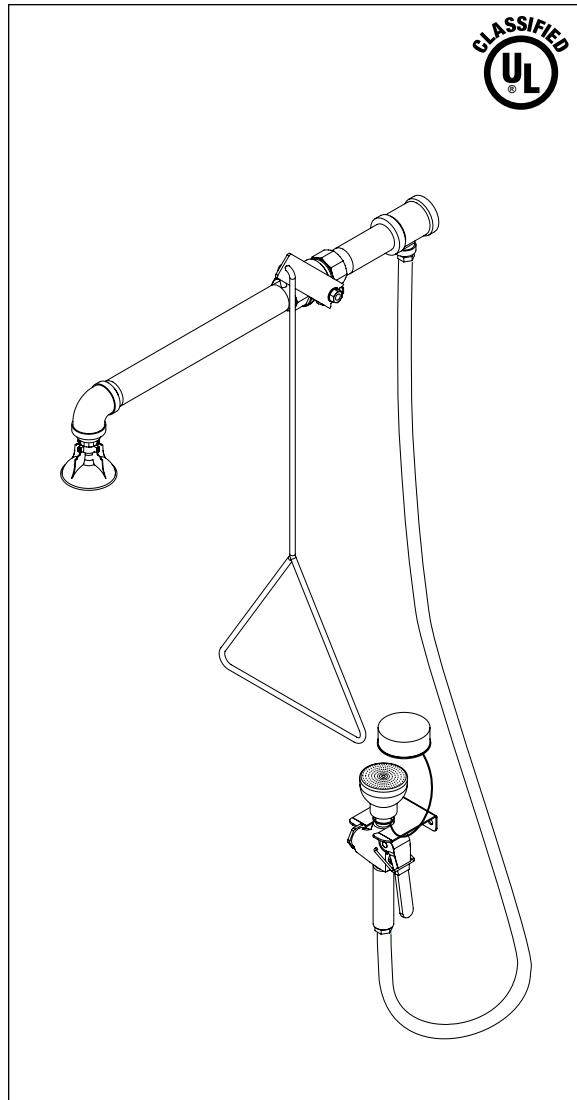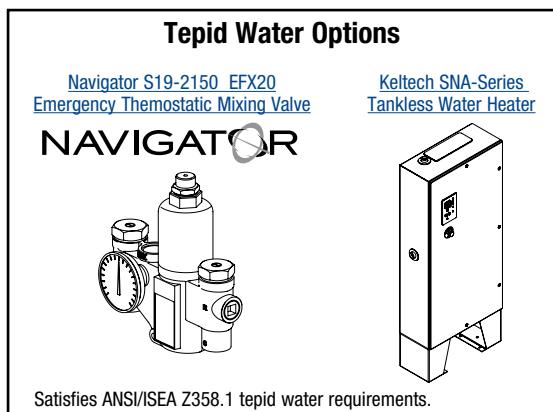

## Standard Equipment

### SpinTec™ Showerhead

3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic for high visibility in emergency situations. SpinTec drench showerhead features integral 22 GPM (83.3 L) flow control, conserving water and helping to accurately size your tepid water system.

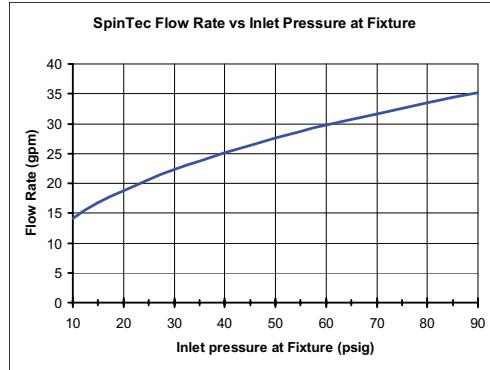

### Valve

Chrome-plated brass 1" NPT stay-open valve. Operated by a stainless steel pull rod with triangular handle.

### 8' Hand-Held Hose Spray


The hose spray attachment acts as a face and/or body rinser. Valve remains open once handle is squeezed. Hose is 8' yellow reinforced thermoplastic with 450 PSI burst strength.

### Pipe and Fittings

Galvanized steel with BradTect® safety yellow coating.

### Water Supply

1" NPT Horizontal.

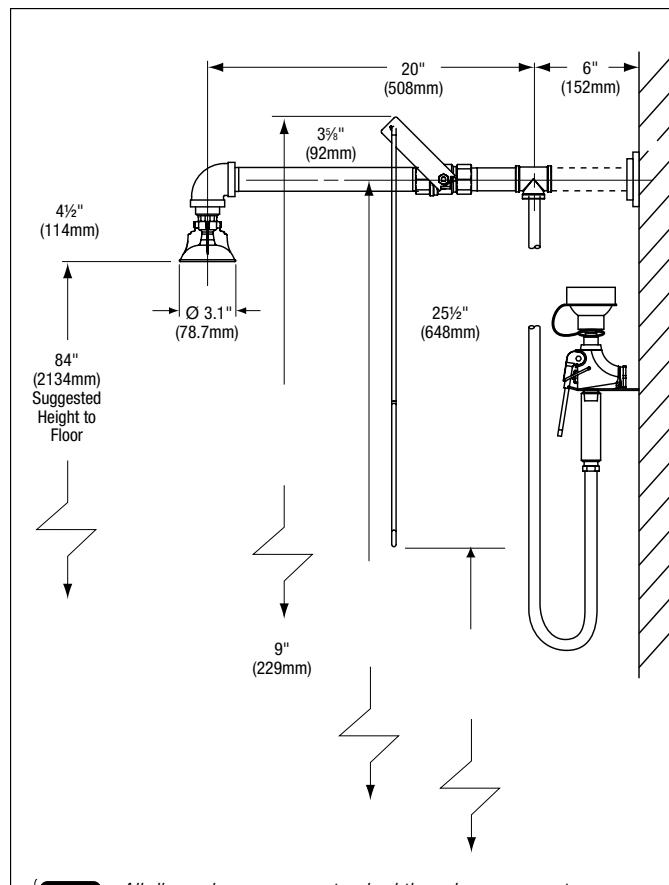

All dimensions assume standard thread engagement. Variations in manufacturing allow for +/- 1/8" (3mm) per threaded joint. To find the tolerance of a dimension, add the number of thread joints in between a dimension and multiply it by 1/8" (3mm).