



A WATTS Brand

# Showerhead Options – Column and Wall Showers

## Features

- Fixed or adjustable spray pattern options available
- Chrome plated to protect against corrosion
- 1.5 gpm (5.7 L/Min) or 2.0 gpm (7.6 L/Min) flow control

## Product Compliance

### Complies with

- ANSI A112.18.1M flow requirements
- ASME A112.18.1-2018/CSA B125.1-18 for: S24-038WE15, S24-039WE15, S24-040WE15, S24-116WE15, S24-118WE15, S24-120WE15, S24-086WE15, S24-172WE15, S24-173WE15, S24-174WE15, S24-174WE15, S24-172WE15, S24-173WE15, S24-174WE15, S24-044, S24-045WE20, S24-046WE20, S24-088WE20, S24-127WE20, S24-130WE20, S24-133WE20, S24-173WE20 & S24-174WE20
- WaterSense® certification\*



- Meets California Commission 20 CCR T.20, Div. 2, 1601-1609 (Only showerheads with 1.5 gpm (5.7 L/Min) flow control)

## Options

### Allen Key Volume Control – AKV (S15, S115, S20, & S120 only)

Key operated volume control is adjustable by supervisory personnel only. Does not compensate for pressure fluctuations but restricts maximum discharge to desired level.

### Lever Handle Volume Control – LHV (S15, S115, S20, & S120 only)

Lever handle operated volume control is adjustable by user. Does not compensate for pressure fluctuation but restricts maximum discharge to desired level.

### Lockable Universal Ball Joint – LBJ (S15, S115, S20, & S120 only)

Allows showerhead to be locked at desired angle. Ideal for keeping spray away from dry areas.










### Anchor Plates – AP (Concealed 1C Showerheads with Wall Arm)

Providing additional mounting strength for built-in shower components. 3/16" cadmium-plated steel plate furnished with countersunk mounting holes and 1/4-20 x 1-1/4" machine screws for installation.

### Back Plates –BP Concealed 1C Showerheads with Wall Arm)

Allows most secure anchorage of wall-mounted components. 3/16" cadmium-plated steel plate furnished with couplings, studs, and nuts. Will accommodate 8" wall thickness.

## Concealed Showers (1C) – Showerhead Options

1C Wall Arm Options		1C Bent Arm Options	
	<p><b>Standard Institutional Showerhead</b> Chrome-plated brass arm with stainless steel wall flange and adjustable spray pattern</p> <p>S15 (Flow Rate = 1.5 gpm (5.7 L/Min)) S20 (Flow Rate = 2.0 gpm (7.6 L/Min))</p> <p>Optional Allen Key Volume Control (AKV), Lockable Ball Joint (LBJ), Lever Handle Volume Control (LHV)</p>		<p><b>Standard Institutional Showerhead</b> Chrome-plated brass bent arm with stainless steel wall flange and adjustable spray pattern</p> <p>S115 (Flow Rate = 1.5 gpm (5.7 L/Min)) S120 (Flow Rate = 2.0 gpm (7.6 L/Min))</p> <p>Optional Allen Key Volume Control (AKV), Lockable Ball Joint (LBJ), Lever Handle Volume Control (LHV)</p>
	<p><b>Severe Service Showerhead</b> Chrome-plated brass arm with stainless steel wall flange and fixed directional spray pattern - adjustable only through orifice using 1/8" Allen key</p> <p>SX15 (Flow Rate = 1.5 gpm (5.7 L/Min)) SX20 (Flow Rate = 2.0 gpm (7.6 L/Min))</p>		<p><b>Deluxe Showerhead</b> Heavy chrome-plated ABS construction with brass bent arm, stainless steel wall flange and adjustable spray pattern</p> <p>- All components are anti-liming - WaterSense certified</p> <p>D1 (Flow Rate = 1.5 gpm (5.7 L/Min))</p> 
	<p><b>Deluxe Showerhead</b> Heavy chrome-plated ABS construction with brass arm, stainless steel wall flange and adjustable spray pattern</p> <p>- All components are anti-liming - WaterSense certified</p> <p>SF (Flow Rate = 1.5 gpm (5.7 L/Min))</p> 		<p><b>Axis Showerhead</b> Chrome-plated brass bent arm with stainless steel wall flange</p> <p>- Ball joint (not lockable) - T-Handle adjustable spray pattern - WaterSense certified</p> <p>B1 (Flow Rate = 1.5 gpm (5.7 L/Min))</p> 

Verify all rough-in dimensions prior to installation.











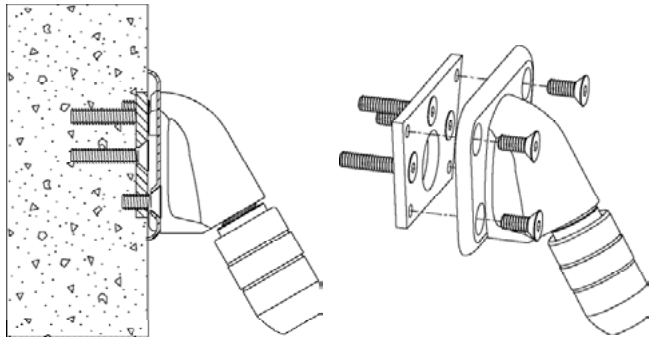


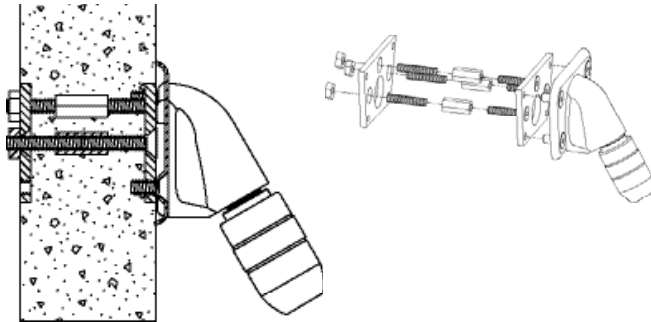

Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.



A WATTS Brand

## Showerhead Options – Column and Wall Showers

### Concealed Showers (1C) – Showerhead Options (continued)

1C Wall Arm Options		1C Bent Arm Options	
	<p><b>Luxury Showerhead</b> Heavy chrome-plated ABS construction with brass arm, stainless steel wall flange, and adjustable spray pattern; includes pulsating massage option</p> <ul style="list-style-type: none"> <li>- All components are anti-liming</li> <li>- WaterSense certified</li> </ul> <p>LX (Flow Rate = 1.5 gpm (5.7 L/Min))</p> 		<p><b>Economy Soft Flow Showerhead</b> Heavy chrome-plated ABS construction with brass bent arm, stainless steel wall flange, and adjustable spray pattern</p> <ul style="list-style-type: none"> <li>- Ball joint (not lockable)</li> <li>- All components are anti-liming</li> <li>- WaterSense certified</li> </ul> <p>ES1 (Flow Rate = 2.0 gpm (7.6 L/Min))</p> 
	<p><b>Axis Showerhead</b> Chrome-plated brass arm with stainless steel wall flange</p> <ul style="list-style-type: none"> <li>- Ball joint (not lockable)</li> <li>- T-Handle adjustable spray pattern</li> <li>- WaterSense certified</li> </ul> <p>B (Flow Rate = 1.5 gpm (5.7 L/Min))</p> 		<p><b>Luxury Showerhead</b> Heavy chrome-plated ABS construction with brass arm, stainless steel wall flange, and adjustable spray pattern; includes pulsating massage option</p> <ul style="list-style-type: none"> <li>- All components are anti-liming</li> <li>- WaterSense certified</li> </ul> <p>LX1 (Flow Rate = 1.5 gpm (5.7 L/Min))</p> 
	<p><b>Economy Soft Flow Showerhead</b> Heavy chrome-plated ABS construction with brass arm, stainless steel wall flange, and adjustable spray pattern</p> <ul style="list-style-type: none"> <li>- Ball joint (not lockable)</li> <li>- All components are anti-liming</li> <li>- WaterSense certified</li> </ul> <p>ES (Flow Rate = 2.0 gpm (7.6 L/Min))</p> 	<p><b>Anchor Plate for Showerheads</b></p> 	
	<p><b>Multi-Jet Showerhead</b> Heavy chrome-plated ABS construction with brass arm, stainless steel wall flange, and lever handle adjustable spray pattern</p> <ul style="list-style-type: none"> <li>- Ball joint (not lockable)</li> <li>- All components are anti-liming</li> <li>- WaterSense certified</li> </ul> <p>J (Flow Rate = 1.5 gpm (5.7 L/Min))</p> 	<p><b>Back Plate for Showerheads</b></p> 	
	<p><b>Ligature Resistant Showerhead</b> Chrome-plated brass showerhead with built-in wall flange</p> <ul style="list-style-type: none"> <li>- Non-adjustable spray pattern</li> <li>- Does not make shower ligature resistant</li> </ul> <p>AS (Flow Rate = 2.0 gpm (7.6 L/Min))<sup>1</sup></p>		

<sup>1</sup> Considered a special order

Verify all rough-in dimensions prior to installation.

Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.



A WATTS Brand

## Showerhead Options – Column and Wall Showers

Standard Selection	
<b>Showerhead Type (select one)</b>	
<b>Showerhead w/Wall Arm</b>	
<b>S15</b>	Standard Institutional Showerhead – 1.5 gpm (5.7 L/Min)
<b>SX15</b>	Standard Institutional Showerhead – 2.0 gpm (7.6 L/Min)
<b>S20</b>	Severe Service Showerhead – 1.5 gpm (5.7 L/Min)
<b>SX20</b>	Severe Service Showerhead – 2.0 gpm (7.6 L/Min)
<b>SF</b>	Deluxe Showerhead – 1.5 gpm (5.7 L/Min)
<b>LX</b>	Luxury Showerhead – 1.5 gpm (5.7 L/Min)
<b>B</b>	Axis Showerhead – 1.5 gpm (5.7 L/Min)
<b>ES</b>	Economy Soft Flow Showerhead – 2.0 gpm (7.6 L/Min)
<b>J</b>	Multi-Jet Showerhead – 1.5 gpm (5.7 L/Min)
<b>AS</b>	Ligature Resistant Showerhead – 2.0 gpm (7.6 L/Min) <sup>1</sup>
<b>Showerhead w/Bent Arm</b>	
<b>S115</b>	Standard Institutional Showerhead – 1.5 gpm (5.7 L/Min)
<b>S120</b>	Standard Institutional Showerhead – 2.0 gpm (7.6 L/Min)
<b>ES1</b>	Deluxe Showerhead – 1.5 gpm (5.7 L/Min)
<b>B1</b>	Axis Showerhead – 1.5 gpm (5.7 L/Min)
<b>D1</b>	Economy Soft Flow Showerhead – 1.5 gpm (5.7 L/Min)
<b>LX1</b>	Luxury Showerhead – 1.5 gpm (5.7 L/Min)

<sup>1</sup> Considered a special order

Optional Selections	
<b>Volume Control Type (select one) <sup>2</sup></b>	
<b>AKV</b>	Allen Key Volume Control
<b>LVH</b>	Lever Handle Volume Control
<b>NONE</b>	No Volume Control
<b>Ball Joint Type (select one) <sup>2</sup></b>	
<b>LBJ</b>	Lockable Ball Joint
<b>NONE</b>	No Ball Joint
<b>Showerhead Anchor Plate Type (select one) <sup>3</sup></b>	
<b>AP</b>	Anchor Plate
<b>NONE</b>	No Anchor Plate
<b>Showerhead Back Plate Type (select one) <sup>3</sup></b>	
<b>BP</b>	Back Plate
<b>NONE</b>	No Back Plate

<sup>2</sup> Available for S15, S115, S20 & S120 only

<sup>3</sup> Available for Wall Arm Showereheads only

Verify all rough-in dimensions prior to installation.

Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.



A WATTS Brand

## Showerhead Options – Column and Wall Showers

### Wall Showers – Showerhead Options

	<p><b>Standard Institutional Showerhead</b> Chrome-plated brass arm with adjustable spray pattern</p> <p>S15 (Flow Rate = 1.5 gpm (5.7 L/Min)) S20 (Flow Rate = 2.0 gpm (7.6 L/Min))</p> <p>Optional Allen Key Volume Control (AKV), Lockable Ball Joint (LBJ), Lever Handle Volume Control (LHV)</p>		<p><b>Economy Soft Flow Showerhead</b> Heavy chrome-plated ABS construction with brass arm and adjustable spray pattern</p> <ul style="list-style-type: none"> <li>- Ball joint (not lockable)</li> <li>- All components are anti-liming</li> <li>- WaterSense certified</li> </ul> <p>ES (Flow Rate = 2.0 gpm (7.6 L/Min))</p> 
	<p><b>Severe Service Showerhead</b> Chrome-plated brass arm with fixed directional spray pattern - adjustable only through orifice using 1/8" Allen key</p> <p>SX15 (Flow Rate = 1.5 gpm (5.7 L/Min)) SX20 (Flow Rate = 2.0 gpm (7.6 L/Min))</p>		<p><b>Ligature Resistant Showerhead</b> Chrome-plated brass showerhead with built-in wall flange</p> <ul style="list-style-type: none"> <li>- Non-adjustable spray pattern</li> <li>- Does not make shower ligature resistant</li> </ul> <p>AS (Flow Rate = 2.0 gpm (7.6 L/Min))<sup>1</sup></p>
	<p><b>Deluxe Showerhead</b> Heavy chrome-plated ABS construction with brass arm and adjustable spray pattern</p> <ul style="list-style-type: none"> <li>- All components are anti-liming</li> <li>- WaterSense certified</li> </ul> <p>SF (Flow Rate = 1.5 gpm (5.7 L/Min))</p> 	<p><b>Standard Selection</b></p> <p><b>Showerhead Type (select one)</b></p> <p><b>Showerhead w/Wall Arm</b></p> <p><b>S15</b> Standard Institutional Showerhead – 1.5 gpm (5.7 L/Min)</p> <p><b>SX15</b> Standard Institutional Showerhead – 2.0 gpm (7.6 L/Min)</p> <p><b>S20</b> Severe Service Showerhead – 1.5 gpm (5.7 L/Min)</p> <p><b>SX20</b> Severe Service Showerhead – 2.0 gpm (7.6 L/Min)</p> <p><b>SF</b> Deluxe Showerhead – 1.5 gpm (5.7 L/Min)</p> <p><b>J</b> Multi-Jet Showerhead – 1.5 gpm (5.7 L/Min)</p> <p><b>LX</b> Luxury Showerhead – 1.5 gpm (5.7 L/Min)</p> <p><b>B</b> Axis Showerhead – 1.5 gpm (5.7 L/Min)</p> <p><b>ES</b> Economy Soft Flow Showerhead – 2.0 gpm (7.6 L/Min)</p> <p><b>AS</b> Ligature Resistant Showerhead – 2.0 gpm (7.6 L/Min)<sup>1</sup></p>	
	<p><b>Multi-Jet Showerhead</b> Heavy chrome-plated ABS construction with brass arm and lever handle adjustable spray pattern</p> <ul style="list-style-type: none"> <li>- Ball joint (not lockable)</li> <li>- All components are anti-liming</li> <li>- WaterSense certified</li> </ul> <p>J (Flow Rate = 1.5 gpm (5.7 L/Min))</p> 		
	<p><b>Luxury Showerhead</b> Heavy chrome-plated ABS construction with brass arm and adjustable spray pattern; includes pulsating massage option</p> <ul style="list-style-type: none"> <li>- All components are anti-liming</li> <li>- WaterSense certified</li> </ul> <p>LX (Flow Rate = 1.5 gpm (5.7 L/Min))</p> 		
	<p><b>Axis Showerhead</b> Chrome-plated brass arm</p> <ul style="list-style-type: none"> <li>- Ball joint (not lockable)</li> <li>- T-Handle adjustable spray pattern</li> <li>- WaterSense certified</li> </ul> <p>B (Flow Rate = 1.5 gpm (5.7 L/Min))</p> 		

<sup>1</sup> Considered a special order

### Optional Selections

#### Volume Control Type (select one)<sup>2</sup>

<b>AKV</b>	Allen Key Volume Control
<b>LVH</b>	Lever Handle Volume Control
<b>NONE</b>	No Volume Control

#### Ball Joint Type (select one)<sup>2</sup>

<b>LBJ</b>	Lockable Ball Joint
<b>NONE</b>	No Ball Joint

<sup>2</sup> Available for S15 & S20 only

Verify all rough-in dimensions prior to installation.

Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.



A WATTS Brand

# Showerhead Options – Column and Wall Showers

## Column Showers – Showerhead Options

An adapter may be required for proper installment of a showerhead on any existing column shower, depending on the type of supply tubing.

	<p><b>Standard Institutional Showerhead</b> Chrome-plated with adjustable spray pattern</p> <p>S15 (Flow Rate = 1.5 gpm (5.7 L/Min)) S20 (Flow Rate = 2.0 gpm (7.6 L/Min))</p> <p>Optional Allen Key Volume Control (AKV), Lockable Ball Joint (LBJ), Lever Handle Volume Control (LHV)</p>		<p><b>Economy Soft Flow Showerhead</b> Heavy chrome-plated ABS construction with brass arm and adjustable spray pattern</p> <ul style="list-style-type: none"> <li>- Ball joint (not lockable)</li> <li>- All components are anti-liming</li> <li>- WaterSense certified</li> </ul> <p>ES (Flow Rate = 2.0 gpm (7.6 L/Min))</p> 
	<p><b>Severe Service Showerhead</b> Chrome-plated with fixed directional spray pattern - adjustable only through orifice using 1/8" Allen key</p> <p>SX15 (Flow Rate = 1.5 gpm (5.7 L/Min)) SX20 (Flow Rate = 2.0 gpm (7.6 L/Min))</p>	<p><b>Standard Selection</b></p> <p><b>Showerhead Type (select one)</b></p> <p><b>Showerhead w/Wall Arm</b></p> <p><b>S15</b> Standard Institutional Showerhead – 1.5 gpm (5.7 L/Min)</p> <p><b>SX15</b> Standard Institutional Showerhead – 2.0 gpm (7.6 L/Min)</p> <p><b>S20</b> Severe Service Showerhead – 1.5 gpm (5.7 L/Min)</p> <p><b>SX20</b> Severe Service Showerhead – 2.0 gpm (7.6 L/Min)</p> <p><b>SF</b> Deluxe Showerhead – 1.5 gpm (5.7 L/Min)</p> <p><b>J</b> Multi-Jet Showerhead – 1.5 gpm (5.7 L/Min)</p> <p><b>LX</b> Luxury Showerhead – 1.5 gpm (5.7 L/Min)</p> <p><b>B</b> Axis Showerhead – 1.5 gpm (5.7 L/Min)</p> <p><b>ES</b> Economy Soft Flow Showerhead – 2.0 gpm (7.6 L/Min)</p>	
	<p><b>Deluxe Showerhead</b> Heavy chrome-plated ABS construction and adjustable spray pattern</p> <ul style="list-style-type: none"> <li>- All components are anti-liming</li> <li>- WaterSense certified</li> </ul> <p>SF (Flow Rate = 1.5 gpm (5.7 L/Min))</p> 		
	<p><b>Multi-Jet Showerhead</b> Heavy chrome-plated ABS construction and lever handle adjustable spray pattern</p> <ul style="list-style-type: none"> <li>- Ball joint (not lockable)</li> <li>- All components are anti-liming</li> <li>- WaterSense certified</li> </ul> <p>J (Flow Rate = 1.5 gpm (5.7 L/Min))</p> 		
	<p><b>Luxury Showerhead</b> Heavy chrome-plated ABS construction and adjustable spray pattern; includes pulsating massage option</p> <ul style="list-style-type: none"> <li>- Ball joint (not lockable)</li> <li>- All components are anti-liming</li> <li>- WaterSense certified</li> </ul> <p>LX (Flow Rate = 1.5 gpm (5.7 L/Min))</p> 		
	<p><b>Axis Showerhead</b> Chrome-plated</p> <ul style="list-style-type: none"> <li>- Ball joint (not lockable)</li> <li>- T-Handle adjustable spray pattern</li> <li>- WaterSense certified</li> </ul> <p>B (Flow Rate = 1.5 gpm (5.7 L/Min))</p> 		

Verify all rough-in dimensions prior to installation.  
Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.

\* EPA WaterSense certified showerheads are owned and manufactured by Delta Faucets® and/or Simmons International Ltd.