

Euro Style Restroom Partitions

Phenolic LT - LOFT Series

LOFT Series Features

- · Exclusive new Phenolic LT material
- Robust and durable
- · Light weight, designed for easier install
- Flush surface construction
- Frameless construction with no visible hardware
- Maintenance-free, 110° pivot slow-close hinge (with finger protection)
- Available in a range of standard and custom colors

Construction

Solid "sandwich-type" construction 1.4 inches (36 mm) thick with a 0.1-inch (3 mm) solid grade face sheet laminate on both sides with a moisture-resistant, foam core and aluminum framing around the edges.

Phenolic LT materials are impact and scratch resistant. Anti-bacterial coating and non-porous surface reduce spread of germs.

Panels

Panels are 1.4 inches (36 mm) thick, constructed from 1/8-inch phenolic face sheets and are encased in an aluminum profile.

Doors

Doors are 1.4 inches (36 mm) thick, constructed from 1/8-inch phenolic face sheets and are encased in an aluminum profile. Interior rebated door catcher is flush integrated into the wall section. Integrated rubber bumper included for silent operation.

Pilasters

Pilaster are 1.4 inches (36 mm) thick, constructed from 1/8-inch phenolic face sheets and are encased in an aluminum profile.

Door Hardware

Integral, self-closing hinges are available for in-swing doors only. This 110° self-closing hinge is hidden in the structure of the door. Out-swing doors are equipped with 180° self-closing barrel hinges. Concealed (non integral) self-closing hinges are also available for in-swing or out-swing doors. All doors are provided with an individual coat hook and door bumper. Stainless steel door knob has an easy-to-maneuver paddle built into the locking wheel on the inside. A white/red indication latch and emergency unlocking feature is integrated on the outside of the door knob. The emergency release uses a 4 mm (5/32 inch) allen key that is inserted into the center of the door knob from the outside to unlock the door. ADA door pull is not included as a default. It is available at an additional cost.

Brackets

Continuous U-brackets are provided.

Feet

Feet are constructed of aluminum.

Height

Standard height of 81.9 inches (2080 mm) including the 4-inch (101.6 mm) floor clearance.

Headrail


A 1.2-inch (30 mm) x 1.2-inch (30 mm) aluminum headrail. Sits flush on top of the pilaster and door.

Verify all rough-in dimensions prior to installation.

Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.

Page 1 of 4 8/2/2024
This information is subject to change without notice.
Bradley_Partitions_LOFT_Series

View Latest Version

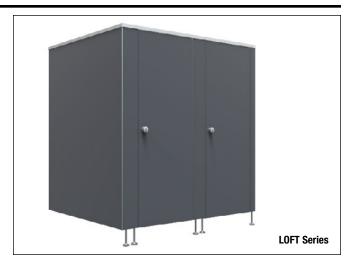

Product Compliance

Complies with

- ADA
- ASTM D6578
- ASTM D2794
- ASTM E84 Class B







Serves the American Disabilities Act and ICC/ANSI 117.1 guidelines, citations 306, 308, 309.4, 609.4 when installed according to these requirements. Consult local codes and standards.

Complementary Bradley Products

- Elvari Grab Bars
- Elvari Napkin Disposal, Surface Mounted
- Elvari Shelf, Surface Mounted, With or Without Hooks
- Elvari Toilet Paper Dispenser, Recessed or Surface Mounted
- Elvari Coat/Robe Hook
- Elvari Seat Cover Dispensers, Recessed or Surface Mounted

© 2024 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com




Example of Stall Width Dimensions - Top View

(mm)



A wide range of stall widths are available.

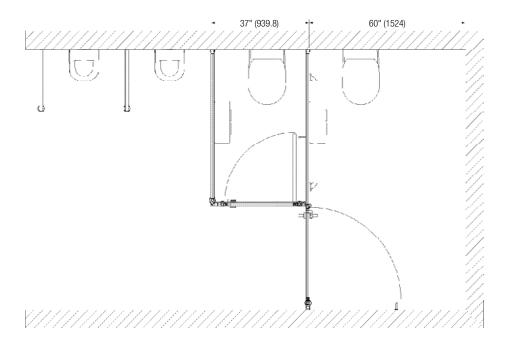


Set Stall Height Dimensions – Front View

(mm)



There is a 9" (228.6 mm) AFF option available for ADA stalls.

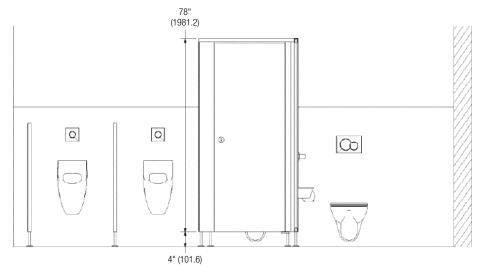

Verify all rough-in dimensions prior to installation.

Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.

Page 2 of 4 8/2/2024
This information is subject to change without notice.
Bradley_Partitions_LOFT_Series

View Latest Version

© 2024 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com




Example of Stall Depth Dimensions – Side View

(mm)



A wide range of stall depths are available.

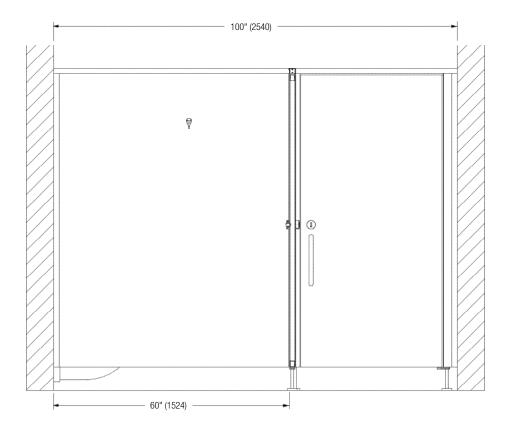

Verify all rough-in dimensions prior to installation.

Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.





Standard Selections (select one)	
Colors	
NOTE: Click on any swatch to view as a larger image.	
18074 - Atlantic	Atlantic
35003 - Birch	Birch
30013 - Dark Wal	nut Dark Walnut
12204 - Manhatta	m Manhattan
12231 - Slate Gre	Slate Grey
70004 - Storm Clo	Storm Cloud
10140 - White	White
Custom	Custom color:
Hinges (select one)	
STD	110° Integral Hinge (in-swing) w/ 180° Barrel (out-swing)
NON-STD	180° Barrel Hinges

 $\label{lem:condition} \mbox{ Verify all rough-in dimensions prior to installation.}$

Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.

View Latest Version