



A WATTS Brand

# WF2803, WF2804, WF2805, WF2808 Bradstone® Classic Washfountains

- Pre-assembled bowl and pedestal
- Available in 54" or 36" diameter semi-circular or circular bowls
- 9" deep bowl, designed for heavy-duty hand washing
- Reliable foot, air, or infrared activations, or TouchTime® mechanical metering

## Specifications

### Size and Capacity

Semi-circular models accommodate up to 3 users (36" models) or 4 users (54" models) at a time. Circular models accommodate up to 5 users (36" models) or 8 users (54" models) at a time. The Classic Sprayhead (non-sectional) is controlled by a foot rail, air activated pushbutton, an infrared sensor, or an electronic pushbutton or piezo switch. The washfountain bowls, pedestals, and valve sets are completely assembled. Only the support column and connections to the valve set and drain require assembly. The operating range is 20-80 psi. Flow rate controlled by volume control valve.

## Construction

**Bradstone®:** An extremely durable plastic material made of reinforced thermosetting polyester resins and fade-resistant pigments.

**Pedestals:** Constructed of die-formed legs, upper braces, scuff bases and panels; legs are zinc chromate plated 14 gauge steel; upper braces are 16 gauge galvanized steel; and scuff bases are 300 series stainless steel with a #4 finish. Bradstone models have tapered, vacuum-formed plastic access panels in the color gray.

## Standard Equipment

### Valves and Fittings

In addition to the bowl and pedestal assembly, the following valves and fittings are standard: sprayhead with stainless steel support tube and bowl gasket; spud with domed strainer; sprayhead supply line; manual mixing valve; volume control valve; and (2) stop, strainer, and check valves.

## Activation Controls

### Foot

Each press of the foot rail mechanically actuates a hold-open valve, with slow closing upon release of foot pressure. Foot rail activates a flow of tempered water at a rate of 0.50 gpm (1.9 Lpm) for WF2803; 1.0 gpm (3.8 Lpm) for WF2804; 0.75 gpm (2.8 Lpm) for WF2805; or 1.0 gpm (3.8 Lpm) for WF2808 from the classic non-sectional sprayhead.

### Air

Each pushbutton pneumatically actuates a non-hold-open, air metering, single-temperature valve with field adjustable timing from 0–45 seconds. Factory preset at 11 seconds. Each pushbutton activates a flow of tempered water from the classic non-sectional sprayhead. Pushbutton requires less than five pounds of pressure.

### Infrared

Hands placed within the bowl are detected by an infrared sensor module which activates a flow of tempered water at a rate of 0.75 gpm (2.8 Lpm) for WF2803; 1.25 gpm (4.7 Lpm) for WF2804; 0.75 gpm (2.8 Lpm) for WF2805; or 1.0 gpm (3.8 Lpm) for WF2808 from the classic non-sectional sprayhead. Shut-off is automatic after hands are removed from the detection area. The infrared sensor uses a conical-shaped transmitting beam, having a detection area adapted to, but not exceeding, the bowl perimeter. The adaptive infrared sensor automatically adapts to the bowl after power is turned on. The infrared sensor is not affected by varying color tones or darkness. Direct sunlight or bright washroom lights will not activate the system. Infrared models also include solenoid valves and a 12V plug-in adapter as standard equipment:

- Solenoid – 12VDC, 3/4" NPT. Few moving parts, and resistant to most chemicals, minerals, and impurities often present in municipal water supplies.
- Low-Voltage UL/CSA listed 120VAC/12VDC plug-in adapter. Plugs into a standard GFCI protected electrical outlet. Location of transformer per local electrical code.



**WF2804**  
**Optional Equipment Shown**

## TouchTime® Mechanical Metering

Each low-voltage, mechanical pushbutton or piezo switch actuates a non-hold-open, slow-closing, anti-hammer solenoid valve that is timed from an electronic potted assembly. Each pushbutton activates a flow of tempered water at a rate of 0.15 gpc (0.57 Lpc) for WF2803; 0.25 gpc (0.95 Lpc) for WF2804; 0.15 gpc (0.57 Lpc) for WF2805; or 0.25 gpc (0.95 Lpc) for WF2808 from the classic non-sectional sprayhead. TouchTime controls water flow at all stations through the use of solid state, digital circuitry. Timing is factory set at 11 second run time but is field adjustable to pre-set timeout periods and optional auto-flush function will activate water flow for a period of 60 seconds any time there has been no activation within the past 24 hours. Pushbutton and piezo switch requires less than five pounds of pressure.

## Product Compliance

### Listed by IAPMO R&T to

- Uniform Plumbing Code (UPC)
- National Plumbing Code of Canada
- International Plumbing Code (IPC)
- IGC 156 and the requirements of CSA B45.5/IAPMO Z124 and ASME A112.18.1/CSA B125.1



### Listed by NSF International to

- NSF/ANSI 372



© 2024 Bradley

P.O. Box 309, Menomonee Falls, WI 53052-0309  
800 BRADLEY (800 272 3539) +1 262 251 6000  
bradleycorp.com



A WATTS Brand

## WF2803, WF2804, WF2805, WF2808 Bradstone® Classic Washfountains

### Models *(Must select one)*

Model	Size	Users	Material
WF2803	36" Semi-Circular	3	Bradstone
WF2804	54" Semi-Circular	4	Bradstone
WF2805	36" Circular	5	Bradstone
WF2808	54" Circular	8	Bradstone

### Standard Selections *(Must select one from each category)*

#### Drain Type *(select one)*

- A** Off-line vent with supplies from below
- B** Centrally rising vent with supplies from above
- H** Centrally rising vent with supplies from below
- O** Off-line vent with supplies from above

#### Mounting Height Type *(select one)*

- STD** Standard Height

#### Sprayhead Type *(select one)*

- CLC** Classic Sprayhead (entire sprayhead activates)

#### Activation Type *(select one)*

- F** Foot **TTPA** TouchTime Pushbutton <sup>1</sup>
- IRP** Infrared **TTPB** TouchTime Piezo Switch <sup>1</sup>
- AST4** Air Valve Metering

#### Water Supply Type *(select one)*

- MMV** Manual Mixing Valve <sup>2</sup> **TMA** Thermostatic Mixing Valve

#### Soap Dispenser Type *(select one)*

- PSD** Powdered Soap Dispenser **SA** Cube Adapter for Individual Soap Dispensers (dispensers sold separately) <sup>3</sup>
- LSD** Liquid Soap Dispenser **NSD** No Soap Dispenser
- MLSD** Metal-Clad Liquid Soap Dispenser
- MPSD** Metal-Clad Powdered Soap Dispenser

#### Bradstone Bowl Color *(select one)*

**NOTE: Click on color swatch to view as a larger image.**

- STRM**  Storm

### Optional Selections

#### Shroud Type

- SH** Stainless Steel Shroud (Conceals Overhead Piping)
- NONE** No Shroud

*NOTE: Floor to ceiling height is required; maximum height of 13 ft. 0 in. A height greater than the maximum height will be considered a special order.*

#### Support Tube Reinforcement Type

- TA** 1-1/2" Tie Pipe Assembly (Not Required When SH is Selected) <sup>5</sup>
- NONE** No Tie Pipe Assembly

#### Towel Dispenser Type

- CFTD** (2 for semi, 3 for circular) C-Fold, Multi-Fold Dispenser
- NONE** No Towel Dispenser


<sup>1</sup> TTPA and TTPB require a low-voltage UL/CSA listed 120VAC/12VDC plug-in adapter.

<sup>2</sup> Not a temperature limiting device. Installer must provide an ASSE 1070 device where required per code.


<sup>3</sup> Towel dispenser with SA option is non-cancelable and non-returnable.

<sup>5</sup> Required with drain A, drain O, and towel dispensers.


### Semi-Circular Bradstone WF2803 and WF2804, Circular Bradstone WF2805 and WF2808




WF2803



WF2804



WF2805

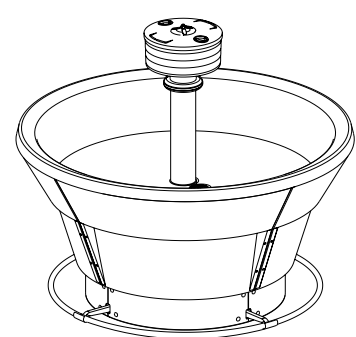

WF2808

© 2024 Bradley




A WATTS Brand


# WF2803, WF2804, WF2805, WF2808 Bradstone® Classic Washfountains

## Dimensional Information

(mm)




\*\*Add 3½" to Dimensions C & D for Optional TouchTime®, Infrared Sensor, or Air Valve

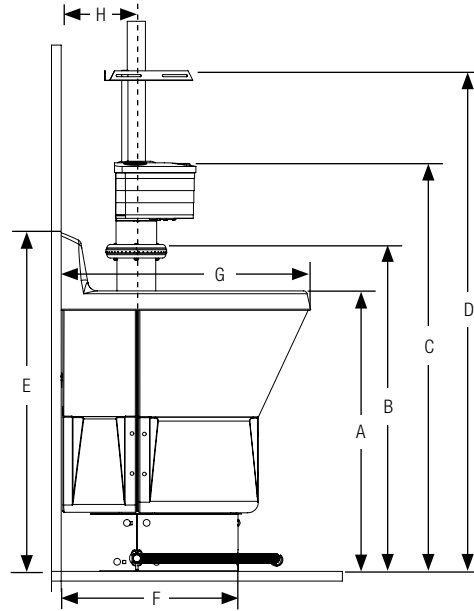


### Semi-Circular

Model	Size	A	B	C**	D**	E	F	G	H
2804	54" (1372)	29¼" (743)	37½" (953)	46" (1168)	54⅝" (1381)	35¼" (895)	24¼" (616)	35¼" (895)	8¼" (222)
2803	36" (914)	29¼" (743)	34" (864)	42½" (1080)	50⅞" (1292)	35¼" (895)	18¼" (464)	25¾" (654)	7¾" (197)



\*\*Add 3½" to Dimensions D & E for Optional TouchTime®, Infrared Sensor, or Air Wave

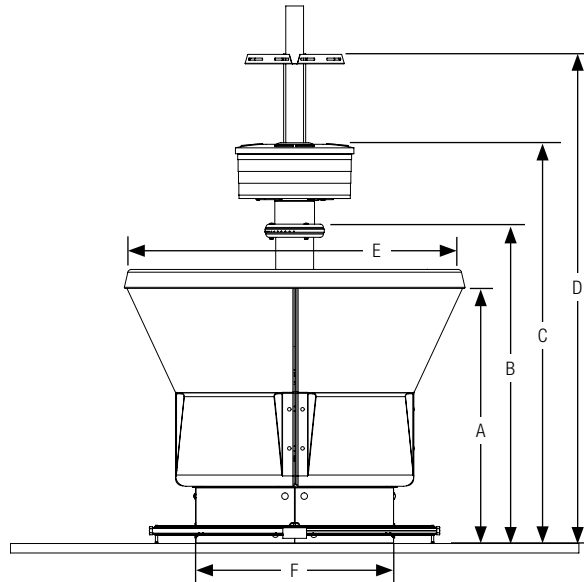

### Circular

Model	Size	A	B	C**	D**	E	F
2808	54" (1372)	29¼" (743)	37½" (953)	46" (1168)	54⅝" (1381)	54 (1372)	32 (813)
2805	36" (914)	29¼" (743)	34" (864)	42½" (1080)	50⅞" (1292)	36 (914)	21 (533)

\*\* Add 3-1/2" (89) for optional TouchTime®, infrared sensor or air valve.



## Bradstone® Classic Washfountains

**(mm)**

1. All pipes and fittings not furnished by Bradley are shown in broken lines.

4. Check valve inlets are 1/2" NPT.

- Off-line vent with supplies from below.

1" NPT Supplies  
Through Wall

Drain Through Wall	Well	Trap for Wall Outlet Only
--------------------	------	---------------------------

1" NPT Supplies from Above Must Reduce to 1/2" Nom. Copper Tube on These Centers to Pass Thru Washfountain

Drain Through Wall ☒ ☐

When installing trap with a coupling and nipple, see dimension D in the chart below. If trap is installed tight to bottom of bowl, dimension D depends on design of trap.

\* Wall to centerline of trap  
\*\* Centerline of drain to floor



A WATTS Brand

# WF2803, WF2804, WF2805, WF2808 Bradstone® Classic Washfountains


## Rough-Ins – Semi-Circular (continued)

(mm)


### Type B

– Centrally rising vent with supplies from above.

#### Top View

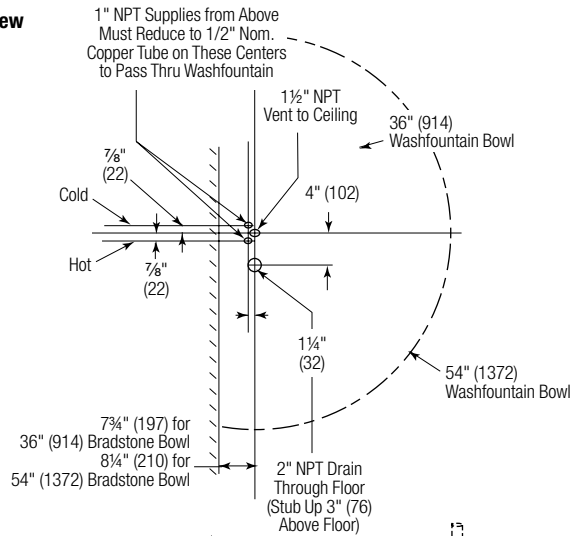


#### Side View

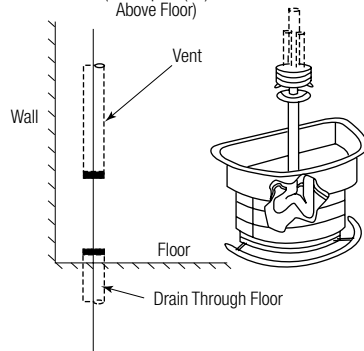


### Type H

– Centrally rising vent with supplies from below.

#### Top View

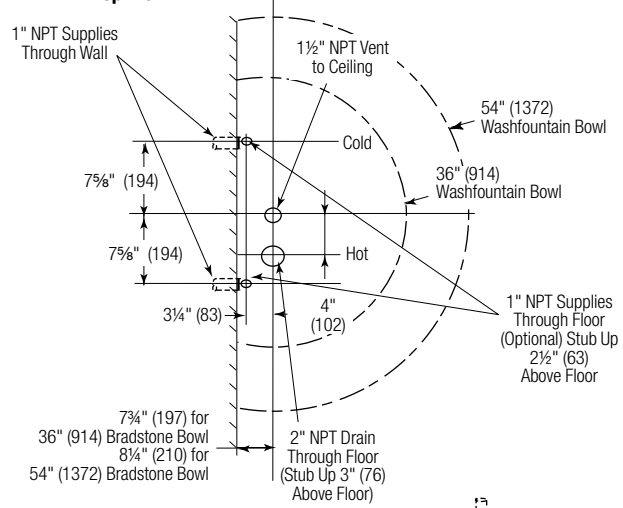

#### Side View

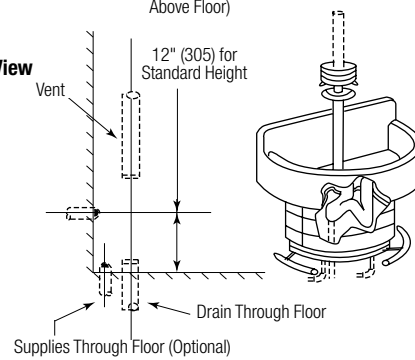


## Dimensions – Pedestal Anchoring

(mm)

Model	Bowl Size	Standard Height		
		A	B	C
WF2504	54" (1372)	16 1/2" (419)	14" (356)	18 1/4" (464)
WF2503	36" (914)	11" (279)	8 5/8" (219)	18 1/4" (464)

### Anchoring Pedestals

1. Place pedestal assembly as shown.
2. Anchor pedestal assembly to floor and wall with suitable wall fasteners. Backing may be required in some types of wall construction.

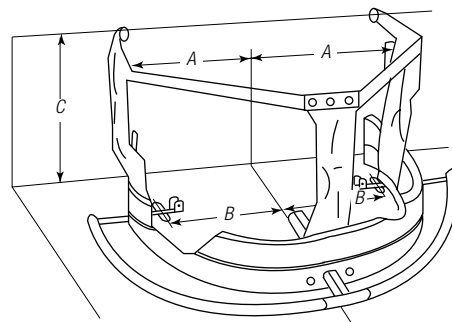



A WATTS Brand



# WF2803, WF2804, WF2805, WF2808 Bradstone® Classic Washfountains

## Rough-Ins – Semi-Circular (continued)

(mm)

Types A and O

Types B and H

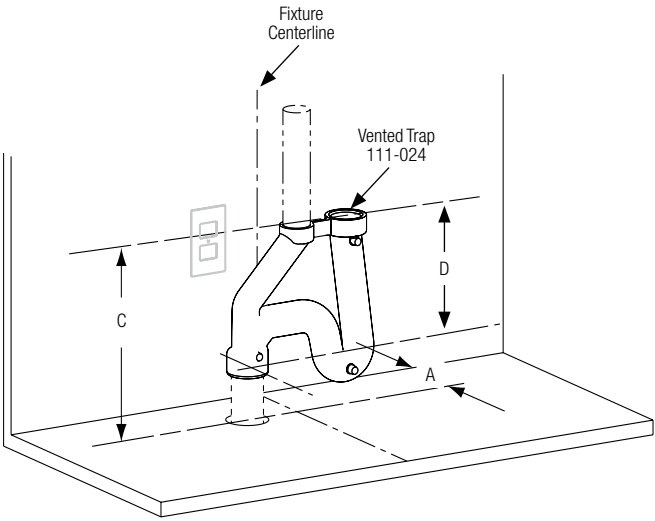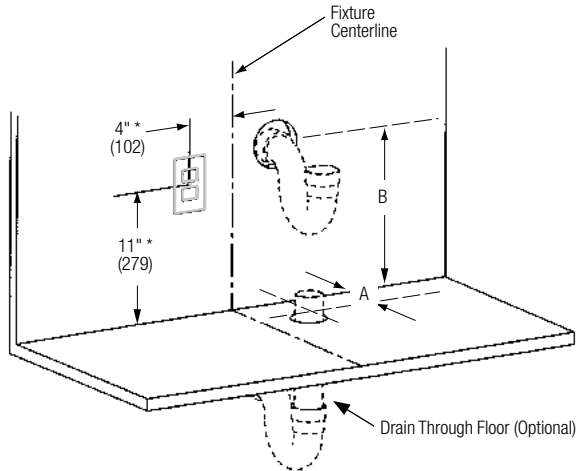

\* Suggested location of 120VAC GFCI electrical outlet when infrared or TouchTime is ordered. Always check local codes before installing. Outlet may be required to be in a remote location.

Model	Bowl Size	A (All Types)	B (Types A & O)	C (Types B & H)	D (Types B & H)
WF2804	54" (1372)	8¼" (210)	6 to 11⅝" (152 to 295)	17" (432)	7" (178)
WF2803	36" (914)	4¾" (121)	6 to 13¼" (152 to 337)	18⅝" (473)	7" (178)



A WATTS Brand


# WF2803, WF2804, WF2805, WF2808 Bradstone® Classic Washfountains

(mm)

## Rough-Ins – Circular


### Type A

- Off-line vent with supplies from below.

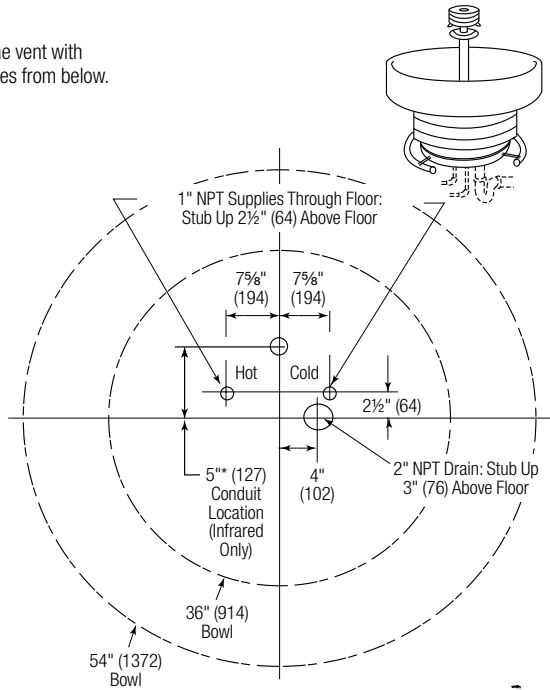


### Type B

- Centrally rising vent with supplies from above.

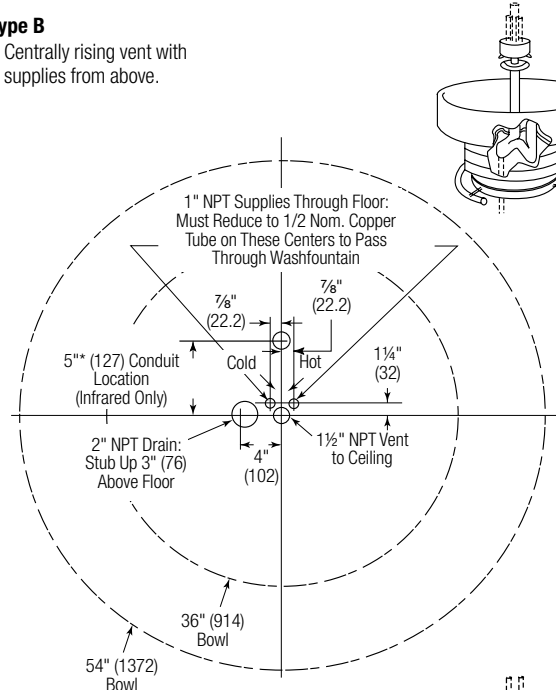


### Type H

- Centrally rising vent with supplies from below.

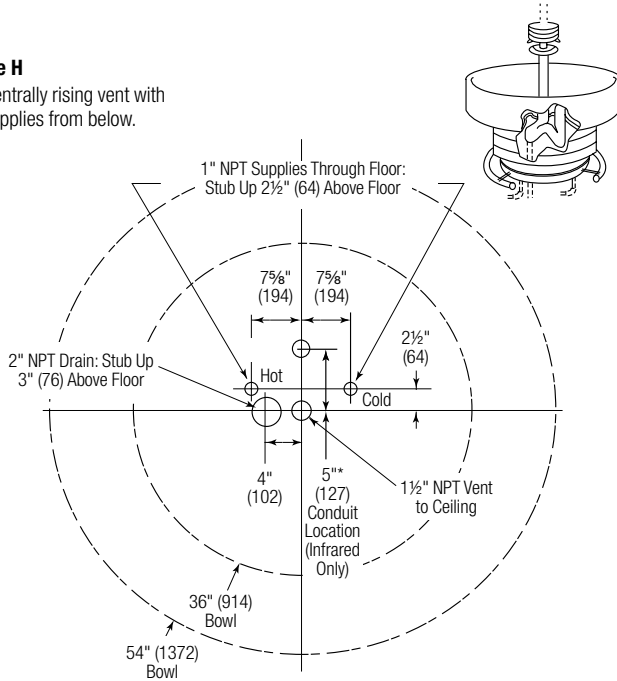

### Type O

- Off-line vent with supplies from above.

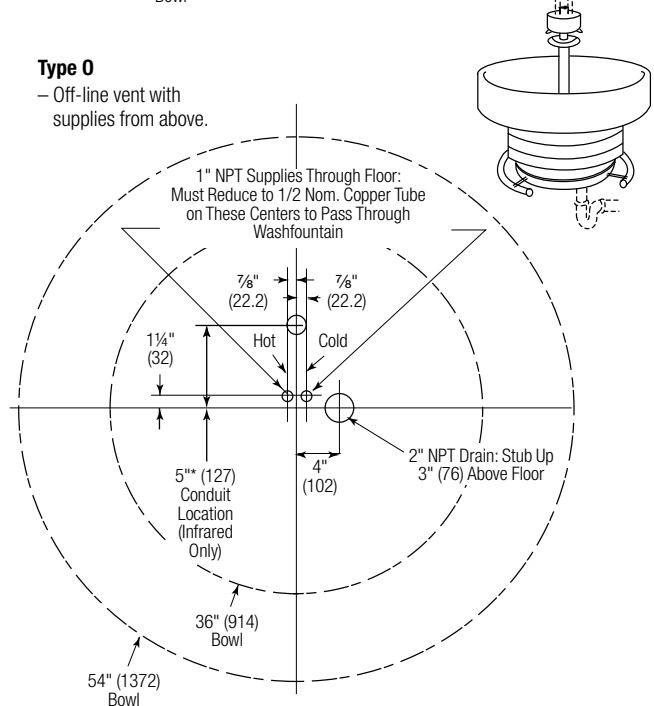

\* Remote mounting of plug-in adapter with 120 VAC electrical supply to washfountain is recommended.  
See local electrical codes before roughing in. (This conduit location is only a recommendation.)