DISCONTINUED

Grab Bar Series

Product Materials

FLANGES: 3" dia. 12 gauge stainless steel.

ESCUTCHEONS: 14 gauge stainless steel. One-piece drawn construction with exposed surfaces in architectural satin finish. Snap over flanges to conceal mounting screws.

TUBING: 1½" O.D. 18 gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Bent ends of tubing pass thru the flanges and are welded for maximum strength. Intermediate supports are contour cut and joined by welding to form an integral part of the grab bar. All exposed welds ground and polished to blend. Mandrel bending process maintains uniform bar diameter. Return provides 1½" standard safety clearance between wall and bar.

Strength

When properly mounted, all Bradley heavy-duty grab bar systems meet or exceed the requirements of ANSI Standard A117.1, the ADA and ABA Accessibility Guidelines for Buildings and Facilities (ADAAG), and the Uniform Federal Accessibility Standard (UFAS). Select dimensions of configurations are 3rd party tested to support up to 1000 pounds. See configurations on the following page. All other 813 grab bars outside of these parameters are rated to support up to 250 pounds. Wall must be reinforced in the area of the grab bar in order to support the load it is intended to support.

Guide Specification

Grab bar shall be fabricated of stain finish stainless steel with concealed mounting flanges in sizes and configurations as indicated. Install with Bradley Mounting Kits as indicated.

Installation

For instructions on installation, warnings, and maintenance, please visit www.bradleycorp.com.

Product Compliance

Complies with

- ADA
- ADAAG
- ICC ANSI A117.1
- UFAS






Consult local and national accessibility codes for proper installation guidelines.



Conformity and compliance to local and national codes is the responsibility of

Orders composed of products indicated as Bradex® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

3/8/2024 Page 1 of 1 This information is subject to change without notice. Bradley_GrabBar_813

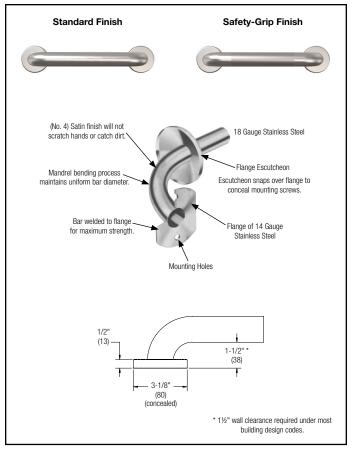

Bradex® Models

Configuration Number	Shipping Data		
	Cu. Ft.	Wt. Lb.	
001-12"	0.13	2	
001-18"	0.14	2	
001-24"	0.14	3	
001-30"	0.15	3	
001-36"	0.15	3	
001-42"	0.15	4	
001-48"	0.25	4	
NOTE: These units must ship via common carrier.			

Optional Features

Feat	ures	Suffix
	Safety-Grip Finish	-2

© 2024 Bradley P.O. Box 309. Menomonee Falls. WI 53052-0309 +1 262 251 6000 800 BRADLEY (800 272 3539) bradleycorp.com

View Latest Version