


Installation

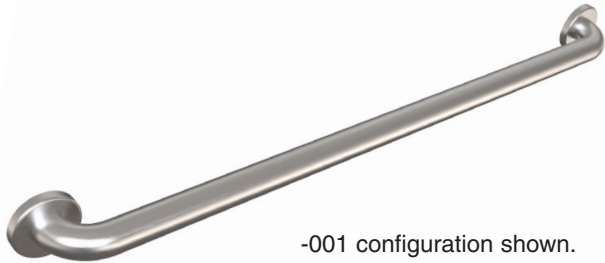

-001 configuration shown.

Grab Bars - Concealed Mounting

813 & 833 Series

WARNING

Mounting screws are supplied by Bradley and are appropriate for wall construction with wood backing. Wall anchors/backing is supplied by the installer and must provide adequate support for the intended load requirements.

Grab bars are no stronger than the anchors and walls to which they are attached, and therefore, must be firmly secured in order to support the intended load requirements. To avoid potential injury, the building owner or maintenance personnel should remove the grab bar from service if the mounting is not adequately secured to the wall or if there are any observed product defects.

CAUTION

Personal Protective Equipment (PPE) is required during the installation of this product.

IMPORTANT

Read this entire installation manual to ensure proper installation. When finished with the installation, file this manual with the owner or maintenance department. Compliance and conformity to local codes and ordinances is the responsibility of the installer.

Separate parts from packaging and make sure all parts are accounted for before discarding any packaging material. If any parts are missing, do not begin installation until you obtain the missing parts.

Product warranties may be found under "Products" on our website at www.bradleycorp.com.



Installation



Verify all rough-in dimensions prior to installation.

⚠ WARNING Wall must be reinforced in the area of the grab bar in order to support the load it is intended to support.

1. Using the flange as a template, mark three mounting hole locations onto the wall.
2. Drill holes and set anchors as appropriate.
3. Mount grab bar and secure using the provided mounting screws.





Use all three mounting screws to secure the grab bar in order to properly support the intended load.

4. Snap escutcheons into place.

Mounting Flange Dimensions

(mm)

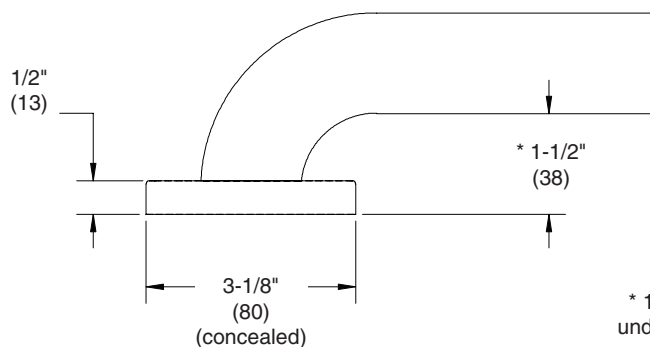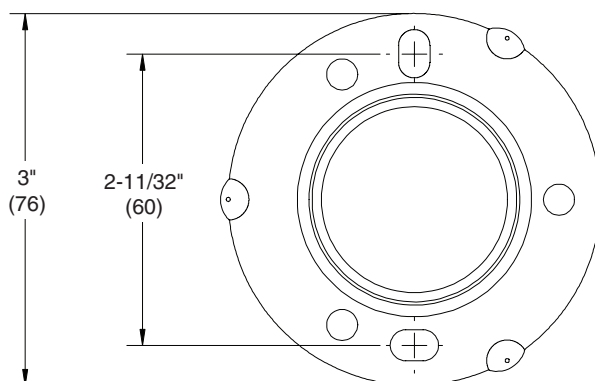

* 1-1/2" wall clearance required under most building design codes