







Model: FIJI GREY
Codes: 100336747
Group: G-226
Format: 3 15/16"x7 7/8"x43/128" approx.

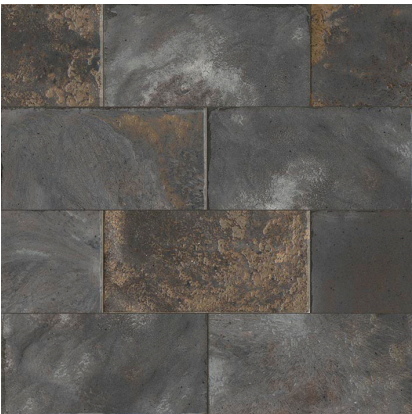

RECOMMENDATIONS		
Recommended adhesive	100043280 TIXOCEM PLUS 25KG	
Recommended joint	100236449 COLORSTUK RAPID CEMENTO N 5KG	
Recommended joint (wet area)	100236449 COLORSTUK RAPID CEMENTO N 5KG	
Recommended adhesive (wet area)	100043280 TIXOCEM PLUS 25KG	

DIMENSIONAL FEATURES		
Length and width deviation	±0.5%	UNE-EN ISO 10545-2*
Side straightness deviation	±0.3 %	UNE-EN ISO 10545-2*
Orthogonality deviation	±0.5%	UNE-EN ISO 10545-2*
Surface flatness deviation	±0.5 %	UNE-EN ISO 10545-2*

FEATURES	
 Material with surface with the ability to produce reflections.	 Material suitable for use on shower walls.
 Material suitable for use on indoor walls.	 There are considerable color changes between pieces.
 Material recommended for installation on walls.	

PHYSICAL PROPERTIES		
Water absorption	BIII	ISO 10545-2*
Breaking strength	>202.41 LBF	>135LBF*
Coefficient of linear thermal expansion	<6.6 1/(10E6*K)	ISO 10545-8*
Crack resistance	PASS	ISO 10545-11*
Flammability	A1	EN 13501-1*
Flexural strength	>20 MPA	ISO 10545-4*

CHEMICAL PROPERTIES		
Stain resistance	Clase 5	ISO 10545-14*
Resistance to chemicals	GA/GLA/GHA	ISO 10545-13*



PACKING		
Sales units per box	10.33 SQF/CS	
Sales units per pallet	620 SQF/PAL	
Sales units per unit	0.22 SQF/ST	
Sale unit	M2	
Base unit	ST	
Net weight	366.63 LB/SQF	
Gross weight	376.13 LB/SQF	

