


Model: PARMA LESTONE

Codes: 100348564

Group: G-222

Format: 5 151/256"X17 83/256"X43/128" approx.

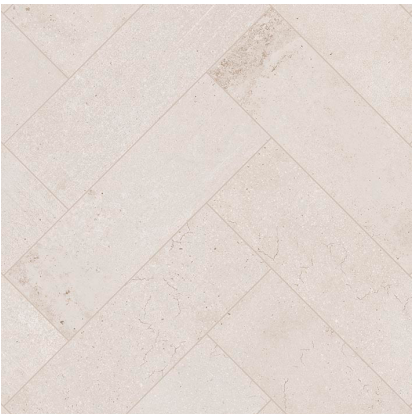

| RECOMMENDATIONS                 |                                        |  |
|---------------------------------|----------------------------------------|--|
| Recommended adhesive            | 100201526 ONE-FLEX PREMIUM BLANCO 25KG |  |
| Recommended joint               | 100236419 COLORSTUK 0-4 BEIGE N 5KG    |  |
| Recommended joint (wet area)    | 100236419 COLORSTUK 0-4 BEIGE N 5KG    |  |
| Recommended adhesive (wet area) | 100201526 ONE-FLEX PREMIUM BLANCO 25KG |  |

| DIMENSIONAL FEATURES        |        |                     |
|-----------------------------|--------|---------------------|
| Length and width deviation  | ±0.5%  | UNE-EN ISO 10545-2* |
| Side straightness deviation | ±0.5 % | UNE-EN ISO 10545-2* |
| Orthogonality deviation     | ±0.5%  | UNE-EN ISO 10545-2* |
| Surface flatness deviation  | ±0.5 % | UNE-EN ISO 10545-2* |

| FEATURES                                                                                                                                |                                                                                                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
|  Gloss-free                                          |  Material suitable for use on shower walls.         |
|  Material suitable for use on outdoor walls.         |  Material suitable for use on indoor walls.         |
|  Material suitable for use on indoor floors.         |  There are consistent color changes between pieces. |
|  Material recommended for installation on the floor. |                                                                                                                                        |

| PHYSICAL PROPERTIES             |             |                   |
|---------------------------------|-------------|-------------------|
| Water absorption                | Bla         | ISO 10545-3*      |
| Breaking strength               | >472.29 LBF | >292LBF*          |
| Resistance to thermal shock     | PASS        | ISO 10545-9*      |
| Crack resistance                | PASS        | ISO 10545-11*     |
| Flammability                    | A1f I/A1    | EN 13501-1*       |
| Slip resistance (pendulum-wet)  | CL 1 (24)   | EN 16165 Anexo C* |
| Slip resistance (pendulum-dry)  | 90          |                   |
| Dynamic coefficient of friction | 0.44        |                   |
| Abrasion resistance             | PEI 3       |                   |

| CHEMICAL PROPERTIES     |            |               |
|-------------------------|------------|---------------|
| Stain resistance        | CL 5       | ISO 10545-14* |
| Resistance to chemicals | GA/GLA/GHA | ISO 10545-13* |



| PACKING                |                |  |
|------------------------|----------------|--|
| Sales units per box    | 8.07 SQF/CS    |  |
| Sales units per pallet | 677.91 SQF/PAL |  |
| Sales units per unit   | 0.67 SQF/ST    |  |
| Sale unit              | M2             |  |
| Base unit              | ST             |  |
| Net weight             | 456.53 LB/SQF  |  |
| Gross weight           | 465.26 LB/SQF  |  |

