


Model: AC4 ENDLESS 1L BROADWAY

Codes: 100312894

Group: G-210

Format: 9 155/256"X49 165/256"X81/256" approx.

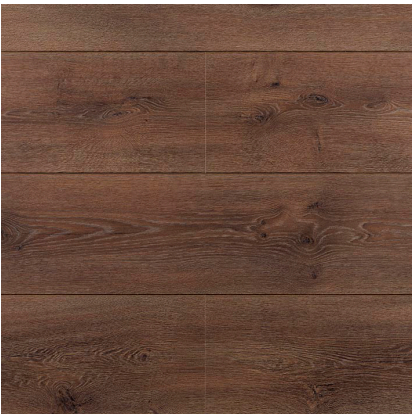

| COMPOSITION | | | | |
|-------------|---------|------|------------------|--------------------------------------------------------|
| | | Size | Material | Type of material |
| | Layer 1 | 0.2 | Melamine | Aminoplastic thermosetting resins |
| | Layer 2 | 0.2 | Decorative paper | |
| | Layer 3 | 7.5 | HDF | High-density Fiber Board and water-repellent glues |
| | Layer 4 | 0.1 | Backside | Sheets of kraft paper impregnated with phenolic resins |

| CERTIFICATIONS | | |
|--------------------|--------------------------|--|
| Carb certification | CARB: Phase II compliant | |

| FEATURES | |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | Boards that have continuity between them, thus achieving the optical effect of much longer formats |
| | Beveled cut on the long sides of the board in order to create a continuity effect |
| | 20 year warranty for domestic use valid for laminate floors that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with EN 13329. |
| | Format where only one board has been used to finish the entire base surface |
| | PanEuropean Forest Certification that guarantees to consumers the origin of the products from sustainably managed forests |
| | 23. Intensive residential |
| | 32. General commercial |
| | Imitates the surface of wood |
| | Installation system where gluing the boards to the floor is not necessary. They are placed on a foam, joined together, as long as the product does not already have a foil on the back of the piece. |
| | 5 year warranty for commercial use valid for laminate floors that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with EN 13329. |
| | Is suitable for installing on water radiant heating |
| | Safety and joint durability are the main features of this easy installation system that guarantees the elimination of gaps between boards throughout the floor's lifetime. The pressure exerted between boards reinforces the union and prevents it from being carried out incorrectly. |

| DIMENSIONAL FEATURES | | |
|----------------------------------|------------------------------------------------------------------|--------------|
| Flatness of item (f) | fw,Cóncavo≤0.50% fw,Convexo≤1%/fl,Cóncavo≤0.15% fl,Convexo≤0.20% | EN 13329* |
| Joint between items | 0.10 mm | EN 13329* |
| Difference in height among items | 0.10 MM | EN 13329* |
| Uv light fastness | 7 | EN 438-2,16* |



| LABORATORY TESTS | | |
|--------------------------------|-----------------------------------|-------------------|
| Resistance to abrasion | AC4 | EN 13329* |
| Impact resistance | IC2 | EN 13329* |
| Resistance to staining | Grado 5 (G 1 y 2) y Grado 4 (G 3) | EN 438-2.15* |
| Resistance to cigarette burns | 4 | EN 438-2.18* |
| Furniture leg effect | No damage | EN 424* |
| Castor chair effect | No damage | EN 425* |
| Swelling in thickness | ≤18% | EN 13329* |
| Formaldehyde emissions | E1 | EN 717-2* |
| Slip resistance (pendulum-wet) | CL 1 (33) | EN 16165 Anexo C* |
| Fire resistance | Cfl-s1 | EN 13501* |
| Heat resistance | R=0.057 m2 K/W | ISO 8302* |
| Thermal conductivity | 0.14 W/M*K | |
| Slip resistance (dcof) | 0.58 | ANSI A137.1* |
| Density of the board | 912 kg/m3-7.3 kg/m2 | EN 323* |
| Slip resistance (pendulum-dry) | 52 | EN 16165 Anexo C* |

| PACKING | | |
|------------------------------|-----------------|--|
| Sales units per box | 26.5 SQF/CS | |
| Sales units per pallet | 1112.79 SQF/PAL | |
| Sales units per unit | 3.31 SQF/ST | |
| Sale unit | M2 | |
| Base unit | ST | |
| Sales units per square meter | 1 M2 | |
| Net weight | 182.17 LB/SQF | |
| Gross weight | 187.26 LB/SQF | |

| SPECIAL PIECES | | | | | | | | | |
|----------------|------------------------------------------|-------|---------------|-----------------|----------------|-----|------------|----------------|----------------|
| SAP | Description | Group | Boxes | Pallet | Units | SKU | Basic Unit | Net Weight | Gross weight |
| 100153848 | IGUALACION ENDLESS 1L BROADWAY 4X270X1 | G-155 | 20 PIECES/BOX | 1000 PIECES/PAL | 9.26 PIECES/M2 | - | - | 0.77 KG/PIECES | 0.8 KG/PIECES |
| 100176686 | MAMPERLAN AC4 ENDLESS 1L BROADWAY7X120X3 | G-163 | 2 PIECES/BOX | 200 PIECES/PAL | 11.9 PIECES/M2 | - | - | 1.58 KG/PIECES | 1.64 KG/PIECES |
| 100153885 | TRANSICION ENDLESS 1L BROADWAY 4X270X1 | G-155 | 20 PIECES/BOX | 1000 PIECES/PAL | 9.26 PIECES/M2 | - | - | 0.77 KG/PIECES | 0.77 KG/PIECES |
| 100153892 | ZOCALO ENDLESS 1L BROADWAY 8X220X1,5 | G-107 | 14 PIECES/BOX | 560 PIECES/PAL | 5.68 PIECES/M2 | - | - | 1.8 KG/PIECES | 1.86 KG/PIECES |

