KOHLER. Faucets

# Triton® Bowe®

Centerset bathroom sink faucet, 0.5 gpm

**K-400T20-5ANL**

## Features

- Quarter-turn washerless ceramic disc valves
- 3-15/16" (100 mm) spout reach
- Vandal-resistant laminar outlet
- Wristblade Lever handles
- Less drain
- 0.5 gpm (1.9 lpm) maximum flow rate at 60 psi (4.14 bar)

## Material

- Solid-brass construction for durability and reliability
- Brass valve bodies

## Installation

- For 4" (102 mm) centers

## Recommended Products/Accessories

K-23723 Faucet cleaner



ADA | CSA B651 | OBC

## Codes/Standards

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61
NSF/ANSI/CAN 372
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*


| Color | Code | Description |
|---|---|---|
| | CP | Polished Chrome |

KOHLER. Faucets

# Triton® Bowe®

Centerset bathroom sink faucet, 0.5 gpm

**K-400T20-5ANL**

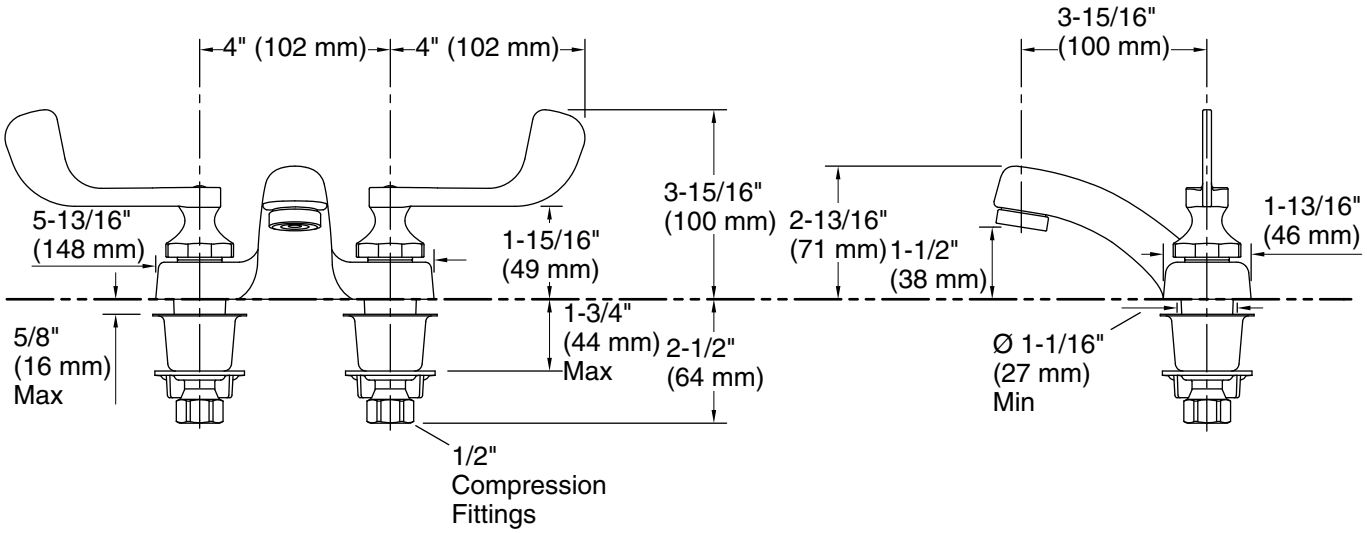


## Technical Information

All product dimensions are nominal.

Faucet flow rate: 0.5 gal/min (1.9 l/min)

Drain included: No

### Spout:

Spout reach: 3-15/16" (99 mm)

## Notes

Install this product according to the installation guide.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.