Occasion®

KOHLER Faucets

Single-function showerhead, 1.75 gpm **K-27050-G**

Features

- Single-function showerhead with 45-nozzle 5" (127 mm) diameter sprayface
- Full Coverage with Katalyst™ air-induction technology delivers a drenching spray experience, ideal for rinsing shampoo from hair
- Optimized sprayface for maximum performance
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 1.75 gpm (6.6 lpm) maximum flow rate at 80 psi (5.5 bar)
- Part of the Occasion bathroom faucet and accessory collection
- Requires shower arm and flange (sold separately)

Material

- Premium material construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Technology

 Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray

Installation

• 1/2" -14 NPT connection

Recommended Products/Accessories

K-72775 Shower Arm and Flange K-23723 Faucet cleaner





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


| Color | Code | Description |
|-------|------|--------------------------------|
| | CP | Polished Chrome |
| | SN | Vibrant® Polished Nickel |
| | AF | Vibrant® French Gold |
| | BN | Vibrant® Brushed Nickel |
| | BV | Vibrant® Brushed Bronze |
| | BL | Matte Black |
| | 2MB | Vibrant® Brushed Moderne Brass |
| | TT | Vibrant Titanium |






Occasion®

Single-function showerhead, 1.75 gpm K-27050-G

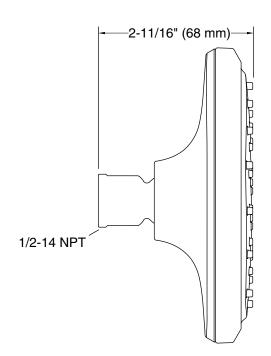

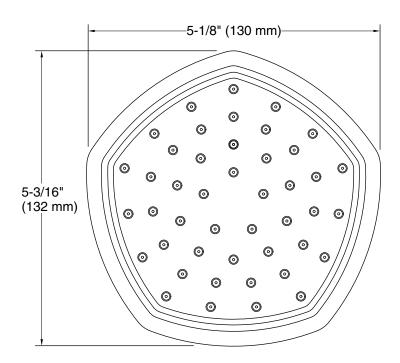

Technical Information

All product dimensions are nominal.

Spout:

Shower/Rainhead rated max flow: 1.75 gal/min (6.6 l/min)

Notes

For use with automatic compensating valves rated at 1.75 gal/min (6.6 l/min) or less.

