
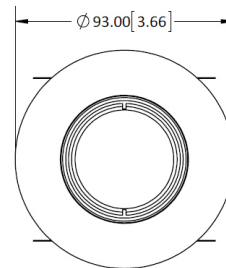


863*

- IP44 rated
- 3.66" diameter die cast metal trim
- Provides general soft downlighting with frosted lens protector
- Shallow 0.44" profile
- Go to [lamps](#) for other options
- Warning! When using up to 37W lamp, please go to [Step 2: Choose Transformer Without Rough-In Housing](#)
- Warning! When using 50W lamp, please go to [Step 3: Choose Transformer With Rough-in Housing](#)

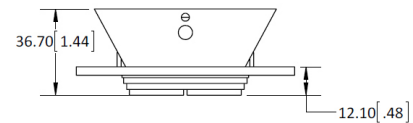

DIMENSIONS ARE IN MILLIMETERS [INCHES]
(NOT TO SCALE)

Variable Specs

Note: Variable spec listed below are dependant on system code selection. [Click here to see specific variations.](#)

- | | |
|--|---|
| <input checked="" type="checkbox"/> Black | <input type="checkbox"/> White |
| <input checked="" type="checkbox"/> Bronze | <input type="checkbox"/> Silver or Aluminum |

Special Note: *All fixtures and lighting systems must be used with dedicated circuit and a Prima transformer, driver, and/or ballast to comply with cUL/cETL listing; or all warranties are void.