


## 8963

- 0.5W x 6 LEDs
- 110 degree beam angle
- Delivered Lumen : 200lm
- Trim diameter: 4.82"
- Wall or ceiling opening diameter: 3.82"
- IP66 Acrylic shade with stainless steel body cover
- Suitable for indoor shower, outdoor ceiling and wall application
- Must order 24V **constant voltage driver**

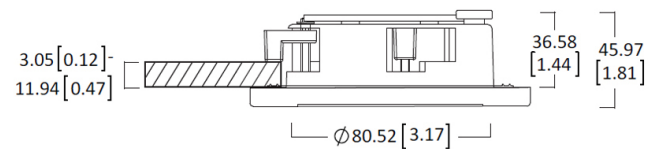

**DIMENSIONS ARE IN MILLIMETERS [INCHES]  
(NOT TO SCALE)**

### Variable Specs

**Note:** Variable specs listed below are dependant on system code selection. [Click here to see specific variations.](#)

Polished Chrome

LED CCT:

- 4000K

Special Note: \*All fixtures and lighting systems must be used with dedicated circuit and a Prima transformer, driver, and/or ballast to comply with cUL/cETL listing; or all warranties are void.