


87\$- S, +\$- G

- 1W x 3 LEDs
- 120 degree overall beam angle
- Delivered lumen (warm white): 200lm
- Trim diameter: 2.95"
- Ceiling opening diameter: 2.50"
- 22" class 2 lead wire with quick connector
- Suitable for non-rough-in housing application
- Must order **350mA constant current LED driver** (NOT included)
- Must use **350mA multi-lamp adapter** when sharing the driver

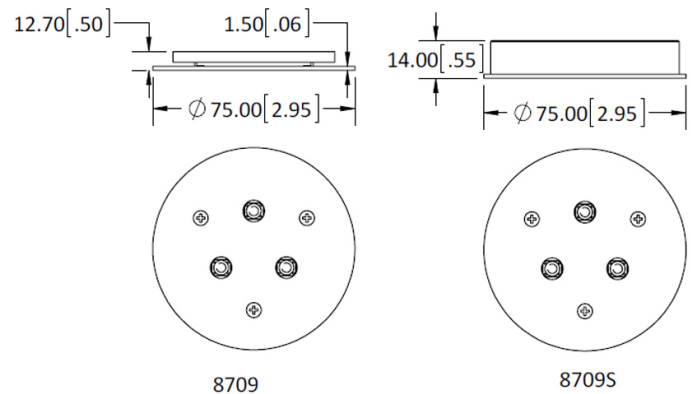

**DIMENSIONS ARE IN MILLIMETERS [INCHES]
(NOT TO SCALE)**

Variable Specs

Note: Variable specs listed below are dependant on system code selection. [Click here to see specific variations.](#)

■ Silver or Aluminum

LED CCT:

- 3000K
- 4000K
- 6500K

Special Note: *All fixtures and lighting systems must be used with dedicated circuit and a Prima transformer, driver, and/or ballast to comply with cUL/cETL listing; or all warranties are void.