
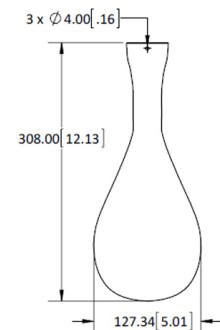


Dew Drop I

- Single lamp suspended luminaire pendant with sculpted glass shade
- Suitable for decorative ambient applications
- Go to [lamps](#) for other options
- When choosing monopoint P1, P2, P3, P4, or P5, you must order proper [transformers](#) or [drivers](#) separately
- This fixture can be mounted on any Prima Lighting System and ceiling canopy through use of an appropriate adapter, see website for available system codes and specialized spec sheets.
- Field-cutable 72" suspension cable

Xelogen (00)	▪ 12V GY6.35 max. 35W xelogen lamp ▪ 35W xelogen lamp included
LED (L4)	▪ Suitable for 12V AC magnetic or electronic LED transformer ▪ Suitable for 12V DC electronic constant voltage driver ▪ 120V input only ▪ 12V / 3W / 180lm / 3000K G4 LED module ▪ Non-Dimmable



**DIMENSIONS ARE IN MILLIMETERS [INCHES]
(NOT TO SCALE)**

Variable Specs

Note: Variable spec listed below are dependant on system code selection. [Click here to see specific variations.](#)




Special Note: *All fixtures and lighting systems must be used with dedicated circuit and a Prima transformer, driver, and/or ballast to comply with cUL/cETL listing; or all warranties are void.


REV. 030521

SYSTEM CODE:	LUMEN STYLES:	FINISH COLORS:
(10) 120V ADAPTER FOR P-TRACK FIXTURE	Not Available	Not Available
(20) FIT SYSTEM	L4/00	BK/SV
(25) 120V RETRO-FIT ADAPTER FOR H-TRACK FIXTURE	Not Available	Not Available
(26) 120V RETRO-FIT ADAPTER FOR J-TRACK FIXTURE	Not Available	Not Available
(27) H-TRACK RETRO FIT ADAPTER	L4/00	BK/SV/WH
(28) J-TRACK RETRO FIT ADAPTER	L4/00	BK/SV/WH
(29) HOUSING ADAPTER FOR P-TRACK	L4/00	BK/SV/WH
(40) LOW VOLTAGE MONORAIL SYSTEM	L4/00	BK/SV/BZ/CP/PC
(42) CABLE SYSTEM – 6" WIDTH	L4/00	BK/SV/PC
(43) CABLE SYSTEM – 2.75" WIDTH	L4/00	BK/SV/PC
(E1) MONOPOINT 5" CANOPY W/ 120V TO 12V TRANSFORMER	00	BK/SV/BZ/PC/CP/WH
(E2) MONOPOINT 5" CANOPY W/ 277V TO 12V TRANSFORMER	00	BK/SV/BZ/PC/CP/WH
(E3) MONOPOINT 5" CANOPY W/ 120V BALLAST OR LED 120V/12V TRANSFORMER	L4	BK/SV/BZ/PC/CP/WH
(E4) MONOPOINT 5" CANOPY W/ 277V BALLAST OR LED 277V/12V TRANSFORMER	Not Available	Not Available
(E5) MONOPOINT 5.5" CANOPY W/ DIMMABLE 120V~277V BALLAST	Not Available	Not Available
(E6) MONOPOINT 5.5" CANOPY W/ CONSTANT CURRENT DRIVER	Not Available	Not Available
(M1-M7) MULTIPOINT	(CONSULT FACTORY)	(CONSULT FACTORY)
(P1) MONOPOINT DIA. 0.7" W/ THREADED NIPPLE MOUNTING	L4/00	BK/SV/BZ/PC/CP/WH
(P2) MONOPOINT DIA. 1.6" W/ THREADED NIPPLE MOUNTING	L4/00	BK/SV/BZ/PC/CP/WH
(P3) MONOPOINT DIA. 1.6" W/ SCREW/ANCHOR MOUNTING	L4/00	BK/SV/BZ/PC/CP/WH
(P4) MONOPOINT 5" DIRECT MOUNT SQUARE COVER PLATE	L4/00	BK/SV/BZ/PC/CP/WH
(P5) MONOPOINT 5" JBOX PLATE	L4/00	BK/SV/BZ/PC/CP/WH


NOTE: DIMENSIONS ARE IN MILLIMETERS [INCHES]




(20) FIT SYSTEM




(27) H-TRACK ADAPTER




(28) J-TRACK ADAPTER

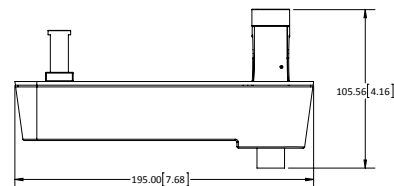


(29) HOUSING ADAPTER FOR P-TRACK




(40) LOW VOLTAGE
MONORAIL SYSTEM




(42) CABLE SYSTEM
- 6.00" WIDTH




(43) CABLE SYSTEM
- 2.75" WIDTH




(E1) MONOPOINT 5" CANOPY W/
120V TO 12V TRANSFORMER




(E2) MONOPOINT 5" CANOPY W/
277V TO 12V TRANSFORMER




(E3) MONOPOINT 5" CANOPY W/ 120V BALLAST
OR LED 120V/12V TRANSFORMER




(P1) MONOPOINT DIA. 0.7" W/
THREADED NIPPLE MOUNTING




(P2) MONOPOINT DIA. 1.6" W/
THREADED NIPPLE MOUNTING



(P3) MONOPOINT DIA. 1.6" W/
SCREW/ANCHOR MOUNTING



(P4) 5" DIRECT MOUNT
SQUARE COVER PLATE



(P5) MONOPOINT 5" JBOX PLATE