

Duncan

Catalog Number

(P1503) Ceramic Shade



SKU Code

Shade Finish

* Contact Prima Customer Service

System Code

(E3) Canopy w/ 120V Ballast or LED 120V/12V Transformer
 (E6) Canopy w/ Constant Current Driver (P1) Dia 0.7" w/ Threaded Nipple Mountin
 (P2) 1.6" Dia w. Threaded Nipple Mounting
 (P3) 1.6" Dia w/ Screw/Anchor Mounting
 (P4) Direct Mount Square Cover Plate (P5) J-Box Plate
 (S6) Canopy for Slope Ceiling
 (S7) J-Box Plate for Slope Ceiling

Lumen Style Available

(LD) Dimmable LED
 (LD) Dimmable Sora 12V Lamp
 (L2) 12V LED Dimmable Module

Hardware Finish

(BK) Black (BZ) Bronze (WH) White (SV) Silver
 (PC) Polished Chrome (CP) Champagne (Matted Gold)




Suspension Option(s)

Cable Drop (72.00" Standard Length)	Downrod
- (SC) Silver	- (06) 6" - (24) 24"
- (BC) Black	- (12) 12" - (30) 30"
- (WC) White	- (18) 18" - (36) 36"

** Custom Lengths Available (Contact Customer Service)

Scale and Dimensions

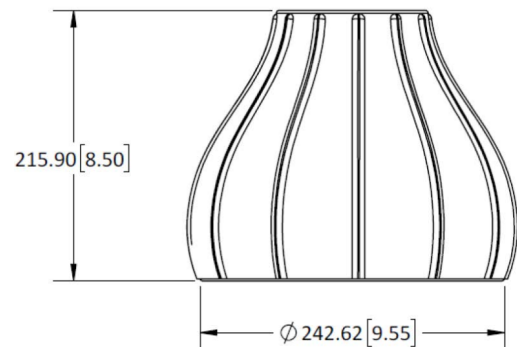

(LD) Dimmable Sora 12V Lamp

(32-L16A-8-308-25) SORAA Brilliant 12V Dimmable MR16 LED / 7.5W / 3000K / CRI 85 / 525lm / 35,000 Lamp Life / 25° Beam Angle
 (32-L16A-8-308-36) SORAA Brilliant 12V Dimmable MR16 LED / 7.5W / 3000K / CRI 85 / 525lm / 35,000 Lamp Life / 36° Beam Angle

(LD) Dimmable LED

(LM408) 4000K / 850lm / 9W
 (LM358) 3500K / 850lm / 9W
 (LM308) 3000K / 850lm / 9W
 (LM278) 2700K / 850lm / 9W
 ** Higher Lumen Output Available
 (Consult Prima Customer Service)

(L2) 12V LED Dimmable Module

3000K - 300lm - 7W

SKU Configurator

Example: P1527-E6-LD-WH-BC-LM358

P1527	-		-		-		-		-	
Catalog Number		System Code		Lumen Style		Hardware Finish		Suspension Options		Light Source Options