



Project Name:		
Туре:		

Zimo III

- · Single lamp suspended luminaire pendant with glass splayed cone shape
- Suitable for decorative ambient and downlight applications
- Go to lamps for other options
- When choosing monopoint P1, P2, P3, P4, or P5, you must order proper transformers or drivers separately
- This fixture can be mounted on any Prima Lighting System and ceiling canopy through use of an appropriate adapter, see website for available system codes and specialized spec sheets
- Field-cuttable 72" suspension cable

Xelogen (00)	12V GY6.35 max. 35W xelogen lamp35W xelogen lamp included	For colored glass
Halogen (00)	12V GU5.3 MR16 max. 50W halogen lamp 35W halogen lamp included	For clear glass
LED (L4)	Suitable for 12V AC magnetic or electronic LED transformer Suitable for 12V DC electronic constant voltage driver 120V input only 12V / 3W / 180lm / 3000K G4 LED module Non-Dimmable	





DIMENSIONS ARE IN MILLIMETERS [INCHES]
(NOT TO SCALE)

Variable Specs


Note: Variable spec listed below are dependant on system code selection. Click here to see specific variations.


Black





Bronze





Special Note: *All fixtures and lighting systems must be used with dedicated circuit and a Prima transformer, driver, and/or ballast to comply with cUL/cETL listing; or all warranties are void.


REV. 030421



Project Name:	
Type:	

SYSTEM CODE:	LUMEN STYLES:	FINISH COLORS:
(10) 120V ADAPTER FOR P-TRACK FIXTURE	Not Available	Not Available
(20) FIT SYSTEM	L4/00	BK/SV
(25) 120V RETRO-FIT ADAPTER FOR H-TRACK FIXTURE	Not Available	Not Available
(26) 120V RETRO-FIT ADAPTER FOR J-TRACK FIXTURE	Not Available	Not Available
(27) H-TRACK RETRO FIT ADAPTER	L4/00	BK/SV/WH
(28) J-TRACK RETRO FIT ADAPTER	L4/00	BK/SV/WH
(29) HOUSING ADAPTER FOR P-TRACK	L4/00	BK/SV/WH
(40) LOW VOLTAGE MONORAIL SYSTEM	L4/00	BK/SV/BZ/CP/PC
(42) CABLE SYSTEM – 6" WIDTH	L4/00	BK/SV/PC
(43) CABLE SYSTEM – 2.75" WIDTH	L4/00	BK/SV/PC
(E1) MONOPOINT 5" CANOPY W/ 120V TO 12V TRANSFORMER	00	BK/SV/BZ/PC/CP/WH
(E2) MONOPOINT 5" CANOPY W/ 277V TO 12V TRANSFORMER	00	BK/SV/BZ/PC/CP/WH
(E3) MONOPOINT 5" CANOPY W/ 120V BALLAST OR LED 120V/12V TRANSFORMER	L4	BK/SV/BZ/PC/CP/WH
(E4) MONOPOINT 5" CANOPY W/ 277V BALLAST OR LED 277V/12V TRANSFORMER	Not Available	Not Available
(E5) MONOPOINT 5.5" CANOPY W/ DIMMABLE 120V~277V BALLAST	Not Available	Not Available
(E6) MONOPOINT 5.5" CANOPY W/ CONSTANT CURRENT DRIVER	Not Available	Not Available
(M1-M7) MULTIPOINT	(CONSULT FACTORY)	(CONSULT FACTORY)
(P1) MONOPOINT DIA. 0.7" W/ THREADED NIPPLE MOUNTING	L4/00	BK/SV/BZ/PC/CP/WH
(P2) MONOPOINT DIA. 1.6" W/ THREADED NIPPLE MOUNTING	L4/00	BK/SV/BZ/PC/CP/WH
(P3) MONOPOINT DIA. 1.6" W/ SCREW/ANCHOR MOUNTING	L4/00	BK/SV/BZ/PC/CP/WH
(P4) MONOPOINT 5" DIRECT MOUNT SQUARE COVER PLATE	L4/00	BK/SV/BZ/PC/CP/WH
(P5) MONOPOINT 5" JBOX PLATE	L4/00	BK/SV/BZ/PC/CP/WH

BCH9.'8=A9BG=CBG'5F9'=B'A=@@A9H9FG'GB7<9GQ

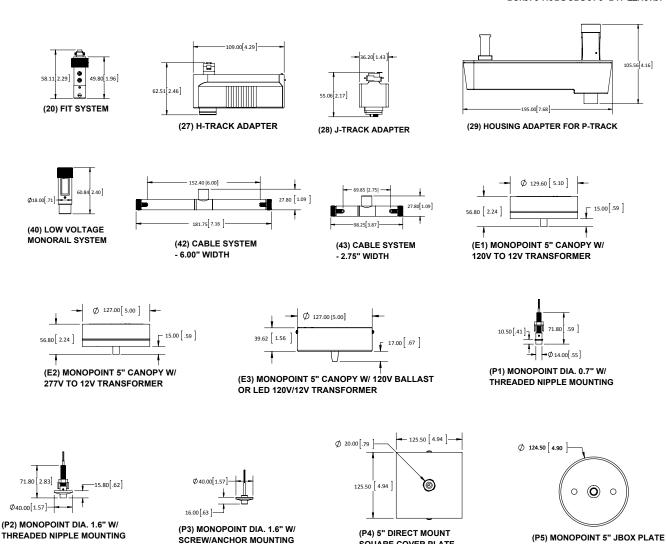

Special Note: *All fixtures and lighting systems must be used with dedicated circuit and a Prima transformer, driver, and/or ballast to comply with cUL/cETL listing; or all warranties are void.

SQUARE COVER PLATE