





Installation Method

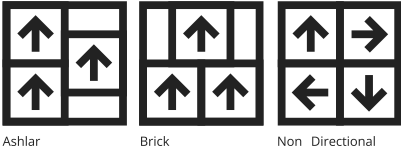

Ashlar

Brick

Non Directional



Quarter turn

Monolithic

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see www.interface.com/disclaimer.

Product Textured Stones 4.5 mm **Color** Dark Concrete **Collection** Level Set Collection

Product Specifications

Product Number	A003
Product Construction	High Performance Luxury Vinyl Tile
Class / ASTM F1700	Class III Printed Vinyl Tile
Wear Layer Thickness	22 mil
Total Thickness	4.5 mm
Backing Class	Commercial Grade
Finish	Ceramor™
Nominal Dimensions	50 cm x 50 cm (19.69 in x 19.69 in)

Performance Specifications

IIC Sound Rating	(ASTM E492-09) 64 IIC
Slip Resistance	(ASTM D2047) >0.55 wet/dry, ADA Compliant
Static Load Limit	(ASTM F970) 1500 psi
Flexibility	(ASTMF137) Passes
Resistance to Heat	(ASTM F1514) Passes
Resistance to Light	(ASTM F1515) Passes
Radiant Flux	(ASTM E648) Class I
Smoke Density	(ASTM E-662) ≤ 450
Size & Squareness	(ASTM F2055) Passes, +/- 0.016 in. per linear foot
Thickness	(ASTM F386) Passes
Residual Indentation	(ASTM F1914) Passes
Resistance to Chemicals	(ASTM F925) Passes

Health + Environmental Specifications

Embodied Carbon (Cradle to Gate)	9.2 Kg CO ₂ /M ²
Total Recycled Content (Pre Consumer)	39%
Indoor Air Quality	GREENGUARD Gold FloorScore® SCS-FS-04366 CDPH 01350 compliant
Material Composition	Free of Ortho Phthalates, Added Formaldehyde and Heavy Metal Stabilizers
Disclosure of Environmental Impacts	Environmental Product Declaration
Disclosure of Product Ingredients	Health Product Declaration
Environmental Certifications	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR

Packaging

Quantity per Carton	26.91 ft ² (2.5 m ²)
Pieces per Carton	10
Weight Per Carton	40 lb (18 kg)
Cartons per Pallet	40
Pallets per Truckload	20

Technical Information

Installation	Interface LVT Installation Guidelines
Maintenance	Recommended Interface LVT Maintenance Guidelines
Reclamation	Recyclable through ReEntry® - Call 1.888.733.6873 (U.S.) / 1.866.398.3191 (Canada)
Warranty	15 Year Standard LVT Warranty
Installation Method	Monolithic Quarter Turn Non Directional Ashlar Brick