# **Purist®**

# KOHLER, Faucets Widespread bathroom sink faucet with Lever handles,

1.2 gpm K-14406-4

#### **Features**

- Two Lever handles offer separate control of hot and cold water
- 5-1/2" (140 mm) spout reach
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Coordinates with Purist faucets, accessories, and showering components to complete your bathroom
- Includes metal touch-activated drain with 1-1/4" tailpiece

## Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

## Installation

- Handles are preassembled on valves to simplify installation
- For 8" 16" (203 406 mm) centers
- Widespread

# **Recommended Products/Accessories**

K-23726 Drain treatment

K-23723 Faucet cleaner

K-14375 24" Double Towel Bar

K-14377 Pivoting toilet paper holder

K-14435 18" Towel Bar

K-14436 24" Towel Bar

K-14441 Towel Ring

K-14443 Robe Hook

K-14444 Vertical toilet paper holder





## Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

# **KOHLER® Faucet Lifetime Limited** Warrantv

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass



# **Purist®**

# **KOHLER** Faucets Widespread bathroom sink faucet with Lever handles, 1.2 gpm

K-14406-4

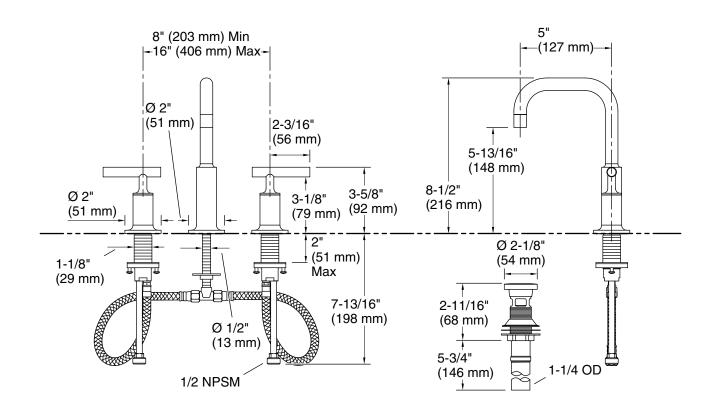

# **Technical Information**

All product dimensions are nominal.

1.2 gal/min (4.5 l/min) Faucet flow rate:

Drain included: Yes Drain tailpiece Yes

included:

Spout:

Spout reach: 5" (127 mm)

## **Notes**

Install this product according to the installation guide.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

