

KOHLER® Faucets Reverse osmosis (RO) sediment pre-filter replacement **Aquifer®** **K-22157**

Features

- Reduces dirt, sand and rust in drinking water
- Filter head automatically turns off the water supply when cartridge is removed
- Replacing RO sediment prefilter every six months keeps filtration system performing effectively

Material

- High-impact plastic construction

Installation

- For cold water use only
- Under-sink
- Quarter-turn twist cartridge for easy installation and replacement



Codes/Standards

CSA B483.1
NSF/ANSI 42

KOHLER® Water Filter Systems Five-Year Limited Warranty


See website for detailed warranty information.

KOHLER® Faucets Reverse osmosis (RO) sediment pre-filter replacement

Aquifer®


K-22157

Ø 2-1/4"
(57 mm)

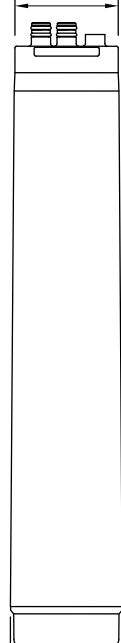

Ø 2-7/16"
(62 mm)

13-9/16"
(344 mm)

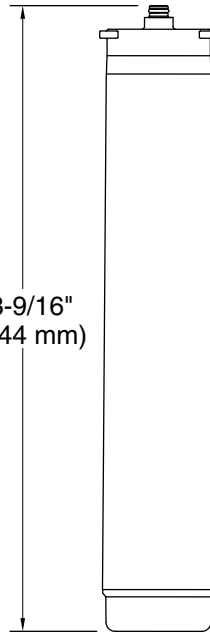

Technical Information

All product dimensions are nominal.

Drain included: No

Spout:

Notes

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.

Application guideline/water supply parameters:

Water Pressure: 40-100 psi (276-689 kPa)

Water Temperature: 40-100°F (4.4-37.8°C)