

Rockfon® Pacific™

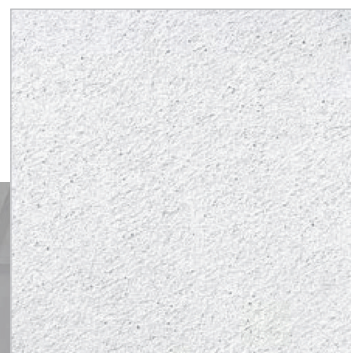
0.60
NRC

Features & Benefits

- Smooth white surface
- Economic solution with basic sound absorption (NRC = 0.60)
- Lightweight panel, easy to carry and install
- Fire Performance - Class A
- Available in square lay-in and tegular

Applications

- Retail
- Utility Space

**High Acoustic
Absorption****Class A Fire
Performance****Moisture and
Sag Resistance****Smooth, Modern
Aesthetics****Mold and Mildew
Resistance****30
YEAR
WARRANTY**
**30-year Warranty
Applies to All Stone
Tiles and Panels**

Materials and Resources (MR)

Interiors Life Cycle Impact Reduction
Environmental Product Declarations
Sourcing of Raw Materials
Material Ingredients
Waste Management

Indoor Environmental Quality (EQ)

✓ Low-Emitting Materials ✓
✓ Interior Lighting ✓
✓ Acoustic Performance ✓

Recycled Content: 49%*



Standard Panels

Edge Designation	Item Number	Modular Size (nominal)	NRC	Fire Class	Mold & Mildew Resistance	Sag Resistance (relative humidity)	Light Reflectance	Low VOC	lbs/sqft	sqft/carton
 SQ Square Lay-In	200	2' x 2' x 1/2"	0.60	A	✓	up to 100%	0.85	✓	0.35	128
	201	2' x 4' x 1/2"	0.60	A	✓	up to 100%	0.85	✓	0.35	128
 SLN Square Tegular Narrow	220	2' x 2' x 1/2"	0.60	A	✓	up to 100%	0.85	✓	0.40	64
	221	2' x 4' x 1/2"	0.60	A	✓	up to 100%	0.85	✓	0.40	128
 SL Square Tegular	260	2' x 2' x 1/2"	0.60	A	✓	up to 100%	0.85	✓	0.40	64
	261	2' x 4' x 1/2"	0.60	A	✓	up to 100%	0.85	✓	0.40	128

*Recycled content values for our stone wool tiles and panels are based on 2021 production averages of a standard 2'x2' tile, and based on their primary production location.

Product Compatibility

15/16" Suspension Systems	9/16" Suspension Systems
200, 1200 and Fire Rated systems	4000 and Fire Rated systems
 SQ Square Lay-in	 SQ Square Lay-in
 SL Square Tegular	 SLN Square Tegular Narrow
	 4000 Tempra

Accessories

	Detail	Rockfon Part Number	Product Number	Product Description	Packaging	
					Pcs/ Ctn	Lbs/ Ctn
General Clips*		250348	935.00	Universal Hold Down Clip	1000	16
		252923	425.01	Hold Down Clip for 5/8" Board 250/1250 Systems	200	2
		250343	820.00	Hold Down Clip for 5/8" Board 250/1250 Systems	1000	7
		237949	490.00	Hold Down Clip for 0" - 3/4" Panels (Black)	100	2
		237952	491.00	Hold Down Clip for 3/4" - 1-1/4" Panels (Blue)	150	2
		237954	492.00	Hold Down Clip for 1-1/2" Panels (Grey)	100	2
		250324	426.01	Butterfly Retention Clip for 0" - 1" Panels	200	15
		250325	427.01	Butterfly Retention Clip for 1" - 2" Panels	150	15
Tile Paint		307988	RFN941	Edge Paint for Field Cut Panels White – 8 oz	Bottle	1
		307989	RFN941Q	Edge Paint for Field Cut Panels White – 32 oz	Can	1

*Clips should be chosen as per tile thickness

**Scan for Full
Accessories Guide**



Rockfon® Pacific™ Properties

Material

Stone wool (Mineral Wool) ceiling tiles with factory applied water-based paint on glass scrim surface.



ASTM E1264 Classification

ASTM E1264 (2022): Type IV, Form 3, Pattern G
ASTM E1264 (2023): Type A, Form A2.3, Pattern G



Fire Performance

Stone wool ceiling tiles achieve Class A fire requirements and are tested for Surface Burning Characteristics to ASTM E84 for the US and CAN/ULC S102 for Canada.

Rockfon® Pacific™ Surface burning characteristics:
UL723 (ASTM E84): Flame Spread Index: 0
Smoke Developed Index: 5
CAN/ULC S102: Flame Spread Index: 5
Smoke Developed Index: 0



Mold and Mildew Resistance

Rockfon® Pacific™ stone wool substrate and tile surfaces are inherently resistant to mold and mildew and are tested to ASTM D3273 (Standard Test Method for Resistance to Growth of Mold on the Surface of Interior Coatings) and ASTM C1338 (Standard Test Method for Determining Fungi Growth Resistance of Insulation Materials and Facings).



Humidity Resistance

Stone wool ceiling tiles are inherently resistant and are tested to ASTM C367 (Standard Test Methods for Strength Properties of Prefabricated Architectural Acoustical Tile or Lay-In Ceiling Panels) and won't sag or warp even in 100% relative humidity.



Cleaning

✓ Vacuum



Sustainability

Stone wool ceiling tiles are UL GREENGUARD Gold certified for low VOC (chemical) emissions and do and meet the State of California's Department of Public Health Services Standard Practice for Specification Section 01350 (California Section 01350) for testing chemical emissions.

Selected potential applications: LEED, WELL, CHPS, Green Globes, BREEAM Int. and CALGreen



Environment

41% recycled content. Recycling content based on the primary production location.



Thermal Resistance

R 1.73 hr.ft².°F/Btu for 1/2 inch (I-P)
R 0.30 m².K/W for 12.7 mm (SI)



Tile Directionality

Rockfon Pacific® tiles are directional and must be installed according to backside arrow direction. The arrow can be turned 180°, not 90°.



Warranty

30-Year Limited Product Warranty
See rockfon.com



GREENGUARD Gold Certified
for Office and Educational
Environments



CERTIFIED Environmental
Product Declaration

Find us on

MasterSpec®

Powered by Deltek Specpoint®

BIM/Revit objects available at:
rockfon.com/products/rockfon-pacific/



Visit rockfon.com to learn
more about Rockcycle.

110424

Rockfon

4849 S. Austin Ave.
Chicago, IL 60638 USA

2024 | Subject to alterations in range and product technology
without prior notice. Rockfon accepts no responsibility for printing errors.
© ROCKWOOL 2022. All rights reserved.

® denotes a trademark that is registered in the United States of America.

Tel. +1-800-323-7164
cs@rockfon.com
rockfon.com