

Angle Fit™ Rubber Stair Treads with Integrated Riser

Product Specification

1. PROPRIETARY PRODUCT/MANUFACTURER

1.1. **Proprietary Product:** Resilient Rubber Stair Treads. For styles utilizing a visually impaired strip in a contrasting color, treads are A.D.A. compliant.

1.1. Manufacturer:


Tarkett North America Phone (800) 899-8916
30000 Aurora Rd.
Solon, Ohio 44139
Web: www.tarkett.com
E-mail: info@tarkett.com

1.2. Proprietary Product Description:

1.1.1. **Construction:** Tarkett Rubber Stair Treads are manufactured from a homogeneous composition of 100% synthetic rubber, high quality additives, and colorants to meet the performance requirements of ASTM F-2169 Standard Specification for Resilient Stair Treads, Type TS, Class 1 and 2, Group 1 and 2. All Tarkett Stair Treads are available with a 2" (5.08 cm) wide strip of contrasting color to comply with A.D.A., Visually-Impaired, and California Title 24 requirements. Standard formulation exceeds ASTM E 648 Class 1 Flammability requirements.

1.2.1. Styles & Physical Characteristics:

Square Nose:

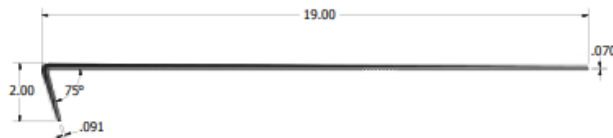

See table below for sizes and options available per texture.

2. PRODUCT PERFORMANCE AND TECHNICAL DATA

- 2.1. **Hardness** (ASTM D 2240): Not less than 85 Shore A
- 2.2. **Abrasion Resistance** (ASTM D 3389): < 1 gram weight loss
- 2.3. **Slip Resistance** (ASTM D 2047): ≥ 0.5 SCOF
- 2.4. **Fire Resistance:** ASTM E 648/NFPA 253 (Critical Radiant Flux): Class 1 (Minimum 0.45 W/cm²)
- 2.5. **Smoke Development** (ASTM E 662/NFPA 258): less than 450
- 2.6. **CAN/ULC S102.2:** FSR 120 / SDC 460

3. INSTALLATION

- 3.1. See Tarkett Stair Tread installation instructions for complete details.

3.2. Adhesive Coverage:

• Tarkett 965

- Porous Substrate: 1/16x1/16x1/16 SQ-notch – 125-150 sq. ft. per gallon
- Non-porous Substrate: 1/16x1/16x1/16 V-notch – 150-175 sq. ft. per gallon

• Tarkett 946 Premium Contact Adhesive (For Nose only when the angle of the stair nose is smaller than the tread template)

Application: Brush or roller

- 1 quart unit (0.95 liters) – 24 to 36 sq. ft.
- 1 gallon unit (3.79 liters) – 144 to 215 sq. ft.

• Tarkett 930 Two-Part Epoxy Caulking Compound (For nose only when the stair nose radius is greater than 1/2" [12.7mm] or in need of repair)

Application: 13.5 oz. cartridge, Gun at 1/4" diameter bead (Use Tarkett 530 dual-cartridge dispenser gun with cartridge)

- Approximately 50 linear ft. / cartridge

• Tarkett 931 Rapid Reaction Epoxy Caulk (For nose only when the stair nose radius is greater than 1/2" [12.7mm] or in need of repair)

Application: 13.5 oz. cartridge, Gun at 1/4" diameter bead (Use Tarkett 530 dual-cartridge dispenser gun with cartridge)

- Approximately 50 linear ft. / cartridge

4. AVAILABILITY AND COST

Available through authorized Tarkett distributors nationwide.

5. MAINTENANCE

72 hours after installation is completed, initial maintenance procedures must be implemented in accordance with manufacturer's requirements. Refer to Stairwell Maintenance Instructions for complete maintenance details.

6. TECHNICAL SERVICES

Visit us on the web at www.tarkett.com

Contact Technical Support at (800) 899-8916 or E-mail:

Resilient.TechnicalSupport@Tarkett.com

Samples: Submittal samples for verification and approval available upon request from Tarkett. Samples shall be submitted in compliance with the requirements of the contract documents. Accepted and approved samples shall constitute the standard materials which represent materials installed on the project.

Tarkett North America

Technical Services Department
30000 Aurora Road
Solon, Ohio 44139
800.899.8916
info@tarkettna.com

www.tarkett.com



Angle Fit™ Rubber Stair Treads with Integrated Riser

Product Specification

7. WARRANTY

Limited 5 year warranty. For complete details, contact Tarkett or an authorized Tarkett distributor

Tread Type	Tread With 1-Piece Riser	Visually Impaired Grit Tape Insert	Visually Impaired Rubber Insert	Nose	Overall Depth	Nominal Length*	Pieces Per Ctn.	Weight Per Ft.
						3', 3.5', & 9 foot are NON-RETURNABLE		
RAISED ROUND SURFACE - ONE PIECE TREAD/RISER	RNRDTR	VIRNRDTR	VIRNRDTRS	SQ	19"	3', 3.5', 4', 4.5', 5', 6', 7', 8', 9'	Up to 6' - 5 pcs - Greater than 6' - 3 pcs	2.2 lbs.
RAISED SQUARE SURFACE - ONE PIECE TREAD/RISER	RNSQTR	VIRNSQTR	VIRNSQTRS	SQ	19"	3', 3.5', 4', 4.5', 5', 6', 7', 8', 9'	Up to 6' - 5 pcs - Greater than 6' - 3 pcs	2.2 lbs.
HAMMERED SURFACE ONE PIECE TREAD/RISER	HNTR	VIHNTR	VIHNTRS	SQ	19"	3', 3.5', 4', 4.5', 5', 6', 7', 8', 9'	Up to 6' - 5 pcs - Greater than 6' - 3 pcs	2.2 lbs.
DIAMOND SURFACE ONE PIECE TREAD/RISER	CNNTR	VICNNTR	VICNNTRS	SQ	19"	3', 3.5', 4', 4.5', 5', 6'	5 pcs.	2.2 lbs.
BAMBOO SURFACE ONE PIECE TREAD/RISER	BMNTR	VIBMNTR	VIBMNTRS	SQ	19"	3', 3.5', 4', 4.5', 5', 6'	5 pcs.	2.2 lbs.
CUBIS SURFACE ONE PIECE TREAD/RISER	CUBTR	VICUBTR	VICUBTRS	SQ	19"	3', 3.5', 4', 4.5', 5', 6'	5 pcs.	2.2 lbs.
CIRCULINITY - FAST LANE PATTERN ONE PIECE TREAD/RISER	CFLNTR	VICFLNTR	VICFLNTRS	SQ	19"	3', 3.5', 4', 4.5', 5', 6'	5 pcs.	2.2 lbs.
RICE PAPER SURFACE ONE PIECE TREAD/RISER	FRPANTR	VIFRPANTR	VIFRPANTRS	SQ	19"	3', 3.5', 4', 4.5', 5', 6'	5 pcs.	2.2 lbs.

*NOTE: In applications where the staircase is the same width as Tarkett Stair Treads, Nosings, Risers, and Stringers, order the next size up to allow for proper installation.

Tarkett North America

Technical Services Department
30000 Aurora Road
Solon, Ohio 44139
800.899.8916
info@tarkettna.com
www.tarkett.com