



# ABA781L/ABA781R

## Clayton™ 60" x 32" Air Bath™

TOTO® USA, INC. has merged heated air and water to create the ultimate in bathing luxury:

### The TOTO® Clayton™ Air Bath™

The TOTO® Clayton™ Air Bath™ will provide the bather a soothing, relaxing and refreshing repose uniquely different than any other bath-time experience. The cast-acrylic Clayton™ Air Bath™ has smooth lines and a deep bathing well which is accented with a chrome plated solid brass grab bar and 12 individual air jets. The individualized check valve system allows the bather to use soaps, bath oils, salts and other bathing essentials without harming the performance of the air system.



ABA781R - Clayton™ 60" x 32" Air Bath™

- 60" x 32" x 21-3/8"
- Luxuriously deep Bathing Well
- Cast-acrylic construction provides years of durability
- Slip-resistant surface
- 1 hp Ultra-quiet Blower
- 300 watt Heated Air Injection System
- Final purge/drying cycle to clean each air jet
- Chrome Plated Solid Brass Grab Bar

- Multi functional Keypad
  - Normal Mode -**  
5 Intensity Levels For Continuous Operation
  - Pulsating Mode -**  
Alternating between the High/Low Intensity levels for Massage
  - Oscillation Mode -**  
Alternating between all 5 Intensity levels for Massage

- **ABA781L**  
Acrylic bathtub. Slip-resistant surface. Left keypad/ right blower

- **ABA781R**  
Acrylic bathtub. Slip-resistant surface. Right keypad/ left blower

#### Colors:

Standard	#01 Cotton
	#12 Sedona Beige
Optional	See price book for additional colors
Grab Bar	Chrome
Jet Trim	Chrome
	#01 Color Matched

# ABA781L/ABA781R

## Clayton™ 60" x 32" Air Bath™

### ■ STYLE

Designed to match the our line of residential bathroom products, TOTO's® tubs complete any bathroom suite. Lucite cast acrylic construction provides the ultimate in strength and durability, while a slip-resistant surface enhances safety in the bath.

### ■ SPECIFICATIONS

Size: 60"L x 32"W  
 Depth: 21-3/8"  
 Warranty: 5 Year Limited Warranty on Acrylic Tub  
 1 Year Limited Warranty on Components and Parts  
 Material: Lucite Cast Acrylic

Electrical Requirements:  
 15 AMP; 120V w/GFI


Shipping Weight:  
**ABA781L/ABA781R**  
 120 lbs.

Shipping Dimensions:  
**ABA781L/ABA781R**  
 67-1/4"L x 38-1/4"W  
 x 26"H

Gallons: **ABA781L/ABA781R**  
 65 to overflow

ABA781L Left keypad/right blower

ABA781R Right keypad/left blower

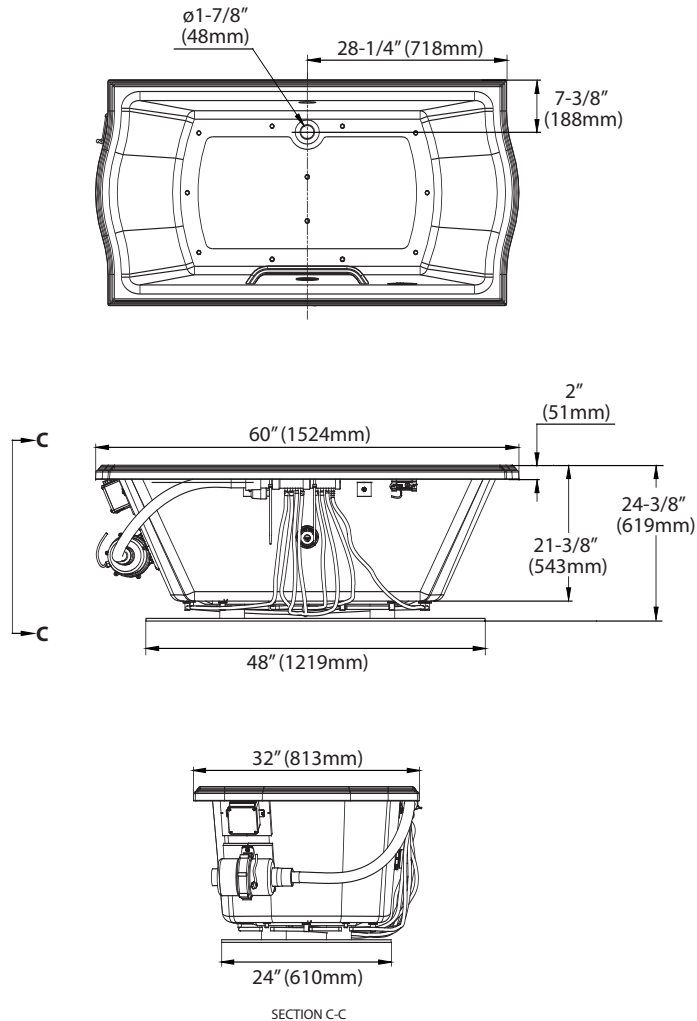

ABA781R - Clayton™ 60" x 32" Air Bath™



Fixture meets ANSI/ASME standard Z124.1, ETL, and C-UPC requirements.

*These dimensions and specifications are subject to change without notice.*

*Use TOTO® cut template to assure rough in dimensions.*

# TOTO®

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260  
 Tel. (888) 295-8134 • Fax. (800) 699-4889 • [www.totousa.com](http://www.totousa.com)

Printed in U.S.A. © TOTO LTD. 02/06 #DXXXXX

Printed on recycled paper

REV 02/06