

Baroque™ Baroque Customline®

MINERAL FIBER FISSURED PANEL

Non-directional, sound-absorbing and sound blocking utilitarian panel offering exceptional value.

Features & Benefits

- Non-directional fissured pattern
- Three-dimensional face scoring available in 3 geometric designs with Customline options
- Environmental Product Declaration (EPD) available for this product
- Available in (Protectone) version suited for UL fire assemblies
- Health Product Declaration (HPD) available for this product

Attributes



BIOSHIELD®
MOLD/MILDEW
RESISTANT
(CUSTOMLINE ONLY)




**EMISSION
COMPLIANT
CERTIFIED**



LR 0.83



**RECYCLED
CONTENT
33-44%**

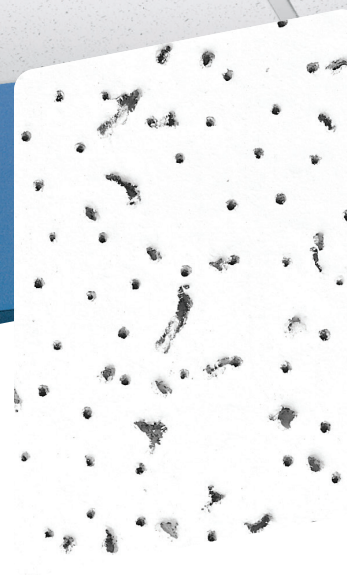

LEED® v4

RECYCLED CONTENT			
CLASS A PROTECTONE®	33%		
	PRE: 28%	POST: 5%	
	44%		
	PRE: 42%	POST: 2%	
✓	MR: PBT Source Reduction (Healthcare)		
✓	EQ: Low-Emitting Materials		
✓	EQ: Daylight		
✓	MR: Material Ingredients (HPDs)		
✓	MR: Sourcing Raw Materials		
✓	MR: Environmental Product Declarations (EPDs)		
✓	MR: Construction and Demolition Waste Management Planning		

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS & PRODUCT DECLARATIONS



EPD AVAILABLE



HPD AVAILABLE

DeclareSM




Living Building Challenge Red List Free®

DeclareSM is a service mark of The International Living Future Institute.


Baroque™, Baroque Customline®

MINERAL FIBER FISSURED PANEL



Baroque

Baroque			FORMAT	DIMENSIONS (IN)	NRC	CAC	RECYCLED CONTENT	UL FIRE-RATED	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET
Trim												
	NRC .55	BET-157	Panels	24 x 24 x 5/8	0.55	33	33%	—	16	64	45	20
		PBT-157	Panels	24 x 24 x 5/8	0.55	35	44%	Yes*	16	64	70	20
		BET-197	Panels	24 x 48 x 5/8	0.55	35	33%	—	8	64	45	20
		PBT-197	Panels	24 x 48 x 5/8	0.55	40	44%	Yes*	8	64	70	20
		BET-2067	Panels	20 x 60 x 5/8	0.55	35	33%	—	8	67	52	20
Reveal												
	NRC .55	BET-154	Panels	24 x 24 x 5/8	0.55	33	33%	—	16	64	45	20
		PBT-154	Panels	24 x 24 x 5/8	0.55	35	44%	Yes*	16	64	70	20
		BET-194	Panels	24 x 48 x 5/8	0.55	35	33%	—	8	64	45	20
Narrow Reveal												
	NRC .55	BET-150	Panels	24 x 24 x 5/8	0.55	33	33%	—	8	6	52	20

Baroque Metric

Baroque Metric		FORMAT	DIMENSIONS (MM)	NRC	CAC	RECYCLED CONTENT	UL FIRE-RATED	PIECES/CARTON	SQ. M/CARTON	LBS./CARTON	CARTONS/PALLET	
Metric Trim												
	<div>NRC .55</div>	BET-2067M	Panels	500 x 1500 x 15	0.55	35	33%	—	8	6	52	20


Baroque Customline

Baroque Customline		FORMAT	DIMENSIONS (IN)	NRC	CAC	RECYCLED CONTENT	UL FIRE-RATED	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET	
Reveal												
	NRC .55	BQCL-224	Panels	24 x 48 x 3/4	0.55	35	33%	—	8	64	55	16
	NRC .50	BQCL-448	Panels	24 x 48 x 3/4	0.50	35	33%	—	8	64	55	16
		BQCL-812	Panels	24 x 48 x 3/4	0.50	35	33%	—	8	64	55	16
		PBQCL-224	Panels	24 x 48 x 3/4	0.50	40	44%	Yes*	8	64	75	16
Narrow Reveal												
	NRC .55	BQCLN-224	Panels	24 x 48 x 3/4	0.55	35	33%	—	8	64	55	16
	NRC .50	BQCLN-448	Panels	24 x 48 x 3/4	0.50	35	33%	—	8	64	55	16
		BQCLN-812	Panels	24 x 48 x 3/4	0.50	35	33%	—	8	64	55	16


* Protectone®: A fire-resistive ceiling when used in applicable UL/ULC assemblies. Protectone product is indicated by a Yes in the UL Fire-Rated column.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

Edge Details

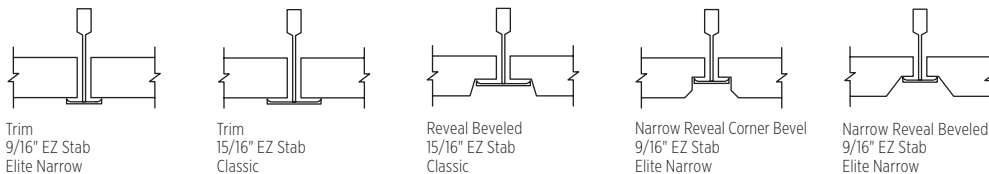

Customline Scoring Options

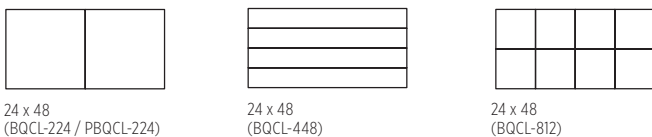



Customline 224



Customline 448



Customline 812

Physical Data

MATERIAL

Mineral Fiber

FLAME SPREAD/SMOKE DEV.

Per ASTM E84 — CAN/ULC S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

(Class A per ASTM E1264)

ASTM E1264 CLASSIFICATION

ASTM E1264-22: Type III, Form 2, Pattern D

ASTM E1264-23: Type A, Form A1.2, Pattern D

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

MOLD/MILDEW RESISTANCE

BioShield® treatment included for added mold and mildew resistance (Customline only).

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

BAROQUE CUSTOMLINE WARRANTY

10-year 104/90 Limited Warranty increases to 30 years when installed with CertainTeed suspension systems. Full warranty information can be found at certainteed.com/warranty.

BAROQUE WARRANTY

1-year Limited Warranty



CertainTeed

CEILINGS • GYPSUM • INSULATION • ROOFING • SIDING • TRIM
20 Moores Road, Malvern, PA 19355 800-233-8990 certainteed.com