

Gyptone® Big™ Curve

GYP SUM PERFORATED PANEL

Unleash your imagination with these large-format, perforated gypsum boards.

Features & Benefits

- Adaptable acoustics and design possibilities to surpass your imagination
- Available in three perforation patterns for screw attachment to walls and ceilings
- Can be curved to a min. 10-ft radius (dry bend) and min. 5-ft radius (wet bend)
- Smooth, paintable surface simplifies installation and maintenance, ensuring long, sustainable life
- Tapered edges on long sides only for easy finishing
- Proprietary Saint-Gobain formaldehyde scavenging performance (inherent to all Gyptone products)

Attributes



EMISSION
COMPLIANT
CERTIFIED



RECYCLED
CONTENT

LEED® v4

RECYCLED CONTENT

up to 85%

- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ EQ: Acoustic Performance
- ✓ EQ: Prereq. Min. Acoustic Performance (Schools)
- ✓ EQ: Low-Emitting Materials
- ✓ MR: Material Ingredients (HPDs)
- ✓ MR: Sourcing Raw Materials

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS & PRODUCT DECLARATIONS



HPD AVAILABLE

Gyptone® Big™ Curve


GYPSUM PERFORATED PANEL


Gyptone® Big™ Curve	DIMENSIONS MM (≈IN.)	NRC*	CAC*	HOLE SIZE (MM)	PERFORATED AREA	RECYCLED CONTENT	MIN PIECES/ PALLET	SQ. M (FT.)/ PIECE	MIN WEIGHT/ PALLET (LBS.)
Line 6									
5200809688	1200 x 2400 x 6.5 (≈47.2 x 94.5 x 1/4)	Ceiling: 0.60 Wall: 0.65†	—	6 x 80	13%	85%	1	3 (≈31)	35
Quattro 41									
5200609695	1200 x 2400 x 6.5 (≈47.2 x 94.5 x 1/4)	Ceiling: 0.70 Wall: 0.80†	—	12	16%	85%	45	3 (≈31)	35
Sixto 63									
5200609700	1200 x 2400 x 6.5 (≈47.2 x 94.5 x 1/4)	Ceiling: 0.65 Wall: 0.70†	—	12	15%	85%	45	3 (≈31)	35

*NRC value when used with CertainTeed Sustainable Insulation in unfaced 2-1/2" (R-8) as an overlay above the installed panel.


†NRC value when used with CertainTeed Sustainable Insulation in unfaced 2-1/2" (R-8) in wall cavity

Accessories


GYPTONE BIG CURVE ACCESSORIES		PRODUCT NAME	PIECES/ CARTON	USE
	5200412213	C-Channel	12	For use in framing the perimeter of the wall structure in a Gyptone BIG or Gyptone BIG Curve wall application
	5200412216	Z-Channel	12	For use in framing horizontally across the wall structure in a Gyptone BIG or Gyptone BIG Curve wall application
	QSC 25 Screw	QSC 25 Screw	1000	For use when attaching Gyptone BIG Curve to metal framing in perforated area

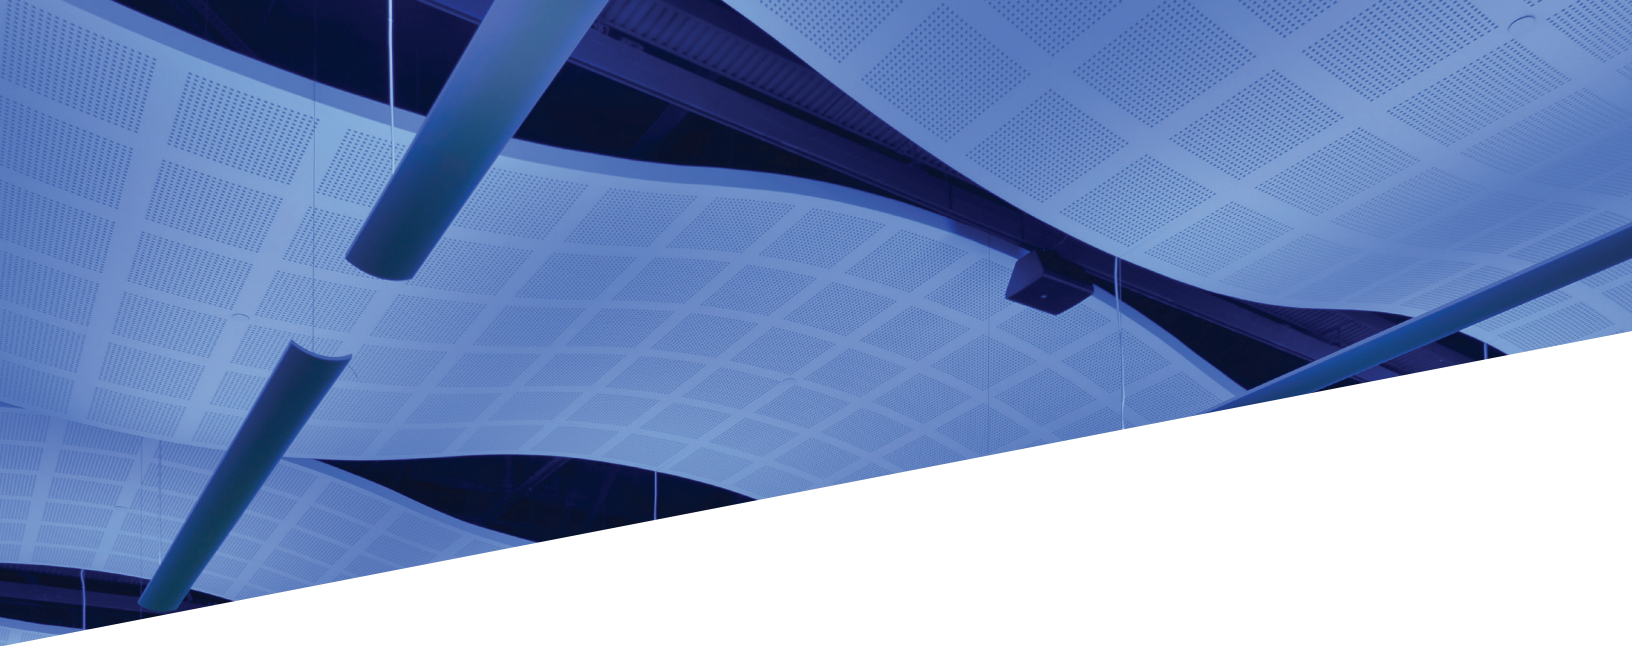

Line 6



Quattro 41



Sixto 63

Physical Data

MATERIAL

Gypsum

FLAME SPREAD/SMOKE DEV.

Per ASTM E84 — CAN/ULC S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

(Class A per ASTM E1264)

ASTM E1264 CLASSIFICATION

ASTM E1264-22: Type XX, Pattern A G

ASTM E1264-23: Type G, Form G1, Pattern A G

VOC EMISSIONS

Independently certified compliant
with California Department of Public Health
CDPH/EHLB/Standard Method Version 1.2, 2017.



CertainTeed

CEILINGS • GYPSUM • INSULATION • ROOFING • SIDING • TRIM
20 Moores Road, Malvern, PA 19355 800-233-8990 [certainteed.com](https://www.certainteed.com)