



MS756204SF - Mercer™ Toilet with SoftClose® Oval Seat

- Unique sculpted design, two piece toilet with SoftClose® Oval seat
- Universal Height 16-1/8" rim height
- G-Max™ flushing technology
- Powerful, quiet flush every time
- Large water surface
- Designer Suite:
Matching Mercer™ pedestal and vessel lavatories

Decorative, ADA compliant, high profile two piece toilet. Low consumption (6 Lpf/1.6 Gpf) siphon jet flushing action.

Tank cover, fittings, chrome plated trip lever, less seat.

■ **MS756204SF**

Elongated, 12" rough-in, with SoftClose® Oval seat

□ **CM756204SF**

Elongated bowl and SoftClose® Oval seat only, 12" rough-in.

□ **ST755S**


Mercer™ tank and cover only. Complete with tank trim and coupling components.

□ **SS204**


SoftClose® Oval: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.



G-Max™ Flushing Technology: Quiet, powerful, commercial grade flushing performance.



Choose a SoftClose® toilet seat, or upgrade to a Washlet.

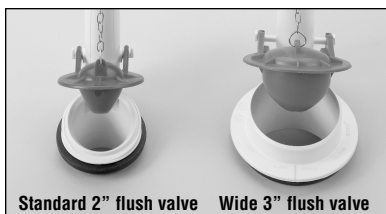

Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.

Colors:

Standard #01 Cotton
Optional See price book for additional colors

Trip Lever:

Standard #01 Cotton
Optional See price book for additional finishes



MS756204SF

Mercer™ Two Piece Toilet, 1.6 GPF

■ PERFORMANCE

The TOTO® G-Max™ low consumption toilets received high ratings during ANSI/ASME and CSA testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

■ SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf
 Flush System: Gravity Feed (G-Max™ System)
 Min. Water Pressure: 8 psi
 Water Surface: 10-1/2" x 8-1/4"
 Trap Diameter: 2-1/8"
 Rough-in: 12" rough-in
 Trapseal: 2-1/4"
 Warranty: Five Year Limited Warranty
 Material: Vitreous china

Shipping Weight: **CM756204SF** 74.5 lbs.
ST755S 31.3 lbs.

Shipping Dimensions: **CM756204SF**
 30-1/8"L x 16-3/4"W
 x 22"H
ST755S 8-7/8"L x 20-5/8"W
 x 18-3/8"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.


Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor.

Recommended seat: SS204

These dimensions and specifications are subject to change without notice.

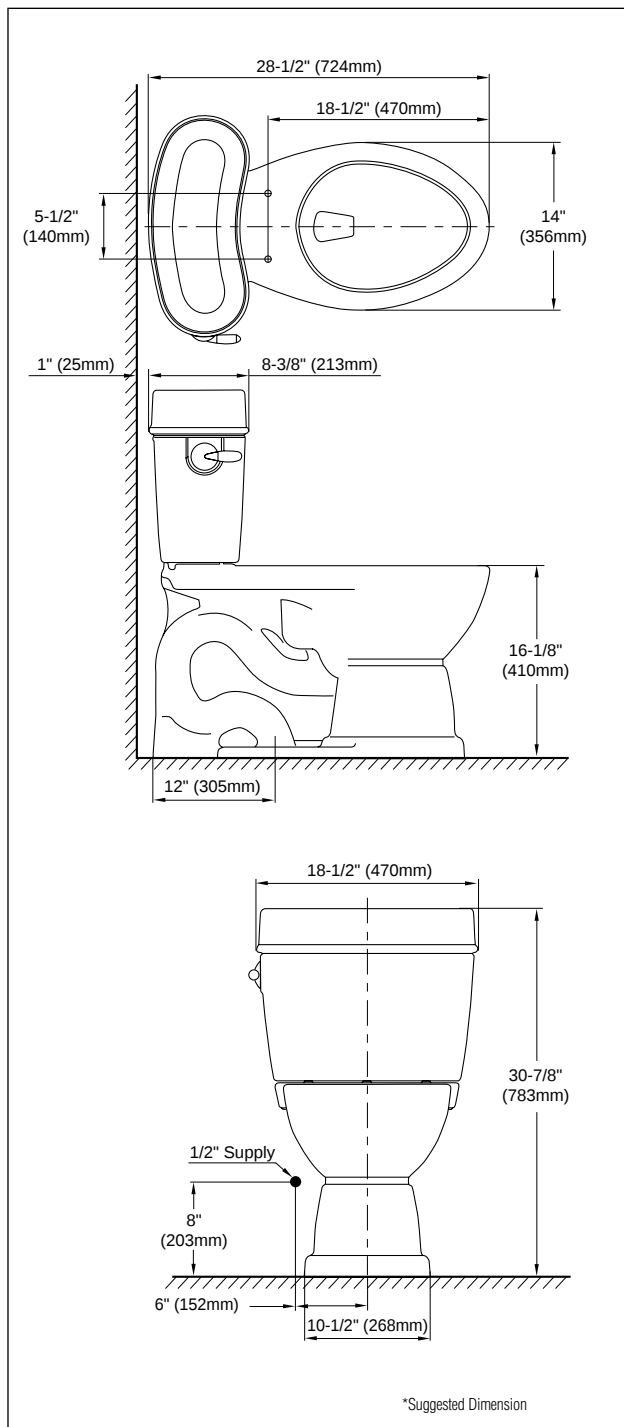

MS756204SF - Mercer™ Toilet

TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (888) 295-8134 • Fax. (770) 282-8701 • www.totousa.com

Printed in U.S.A. © TOTO® LTD. 08/04 #A10210

Printed on recycled paper

REV 08/04