

CS1/24

Promenade 1.6 GPF Toilet, Elongated



CST724 - Promenade Toilet SS114 - SoftClose Seat

- Traditional design with stately lines
- Powerful and quiet flush
- Promenade Design Suite:
 Matching toilets, pedestal and self-rimming lavatories
- Large water surface

High profile, elongated, close coupled toilet. Low consumption (6 Lpf/1.6 Gpf) gravity flushing action.

Tank cover, fittings, chrome plated trip lever less seat.

CST724

Elongated, 12" rough-in, less seat.

□ C724

Elongated front bowl only, 12" rough-in.

☐ ST723

Promenade tank and cover only. Complete with tank trim and coupling components.

☐ SS114

SoftClose: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

Colors:

Standard #01 Cotton

Optional See price book for additional colors

Trip Lever:

Standard #CP Chrome Plated Optional See price book for additional finishes

PERFORMANCE

The TOTO low consumption toilets received high ratings during ANSI/ASME testing at independent laboratories. Designed with a powerful gravity flushing action, the toilet offers a large water surface and a glazed trapway. Promenade toilets are designed to match the Promenade Lavatory Suite.

SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf Flush System: Gravity Feed

Min. Water Pressure: 8 psi

Water Surface: 9-1/2" x 8-3/8"

Trap Diameter: 1-7/8"
Rough-in: 12" rough in
Trap Seal: 2-1/4"

Material: Vitreous china

Warranty: Five Year Limited Warranty

Shipping Weight: C724 - Bowl 50 lbs.

ST723 - Tank 39.5 lbs.

Shipping Dimensions:

C724 - Bowl

27-3/4"L x 11-3/8"W" x 15"W2 x 15-1/8"H


ST723 - Tank

18-7/8"L x 8-5/8"W x 18-1/8"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.

Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others

These dimensions and specifications are subject to change without notice.

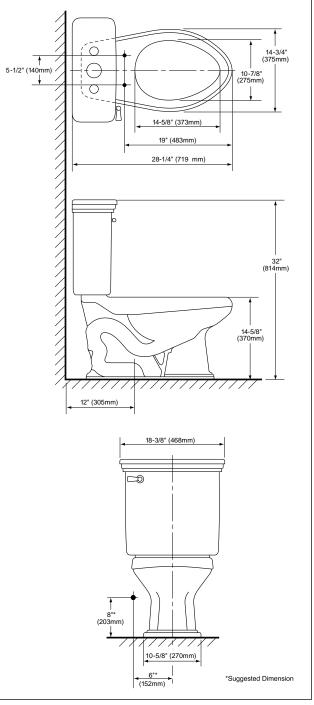

CST724 - Promenade Toilet

