

PRODUCT SPECIFICATIONS ■

Sift™ Guest Chair

May 2014

TECHNICAL SPECIFICATIONS

Backrest and Mesh Seat

Reinforced nylon frame with mesh material. **SoSoft** mesh material is 65% polyester and 35% nylon. Backrest secured to frame with four bolts. Seat secured to frame with four bolts. Integral polypropylene lumbar support mechanism is easily adjusted by the user within a 3" range.

Optional Upholstered Seat

Plywood seat structure with two layers of polyurethane foam with a fabric cover held in place with staples.

Frame

Tubular steel frame made with .08" thick x 1.32" x .88" oval steel tubing.

Arms

Arms are integral to the frame with a black molded reinforced nylon arm cap.

Glides


Four nylon glides.

Weight Capacity

Passes BIFMA standard testing x5. I-201 I and KI's internal standard for 300-pound capacity.



DIMENSIONS

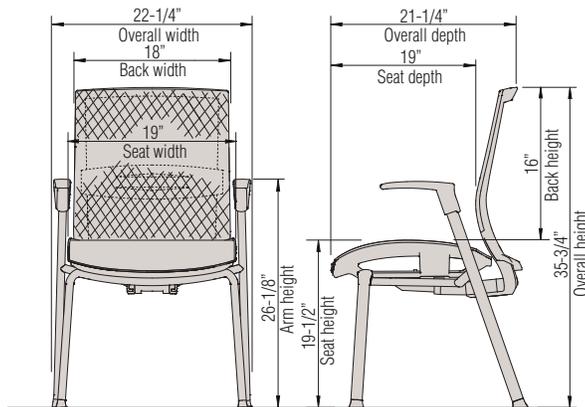

STATEMENT OF LINE - guest chair available with mesh seat and mesh back or upholstered seat and mesh back - always with an integral arm (Sift task chairs also available)



CODE COMPLIANCE

