


Disassembly Instructions



MyPlace / MyPlace High Back Seating

Material Type: A . Steel B. Plastic C. Wood D. Fabric E. Foam F. Cardboard G. Aluminum H. Copper

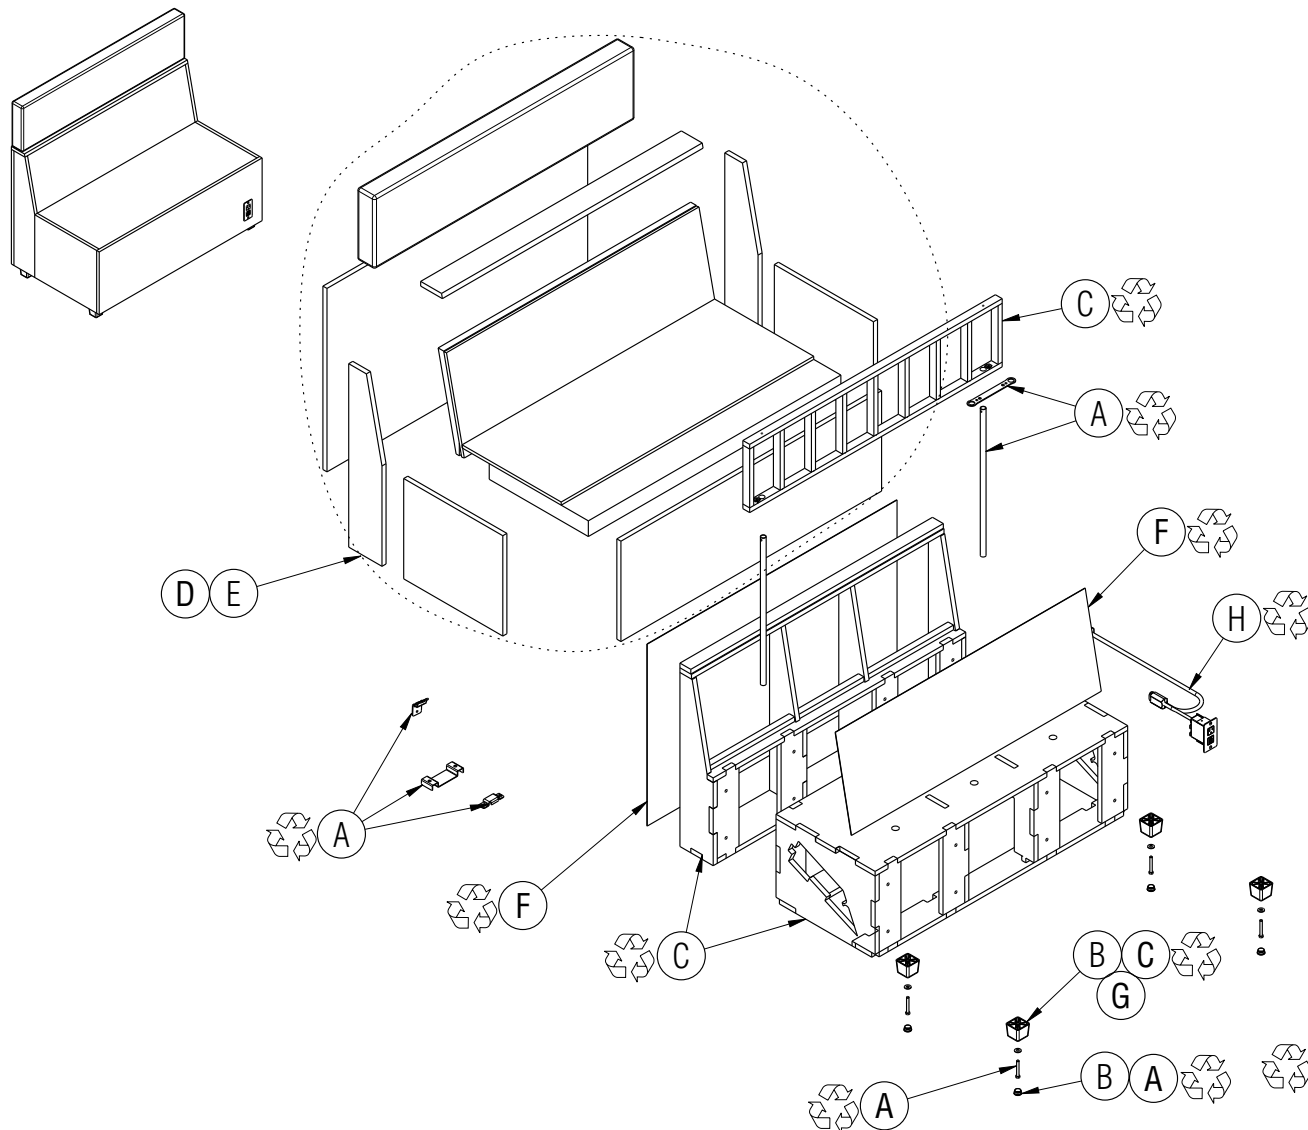

Procedure:

1. Remove any electrical modules.
2. Cut away the cloth and foam covering the wood frame.
3. Remove all cardboard elements.
4. Unscrew glides from bottom of feet or frame.
5. Remove bolt and washer from each foot.
6. Pry off topper from backrest (model dependent). Remove all steel brackets and tubes.
7. Separate seat from back and remove all steel brackets within base assembly (model dependent).

General Notes:

1. Disassembly time: 40-50 minutes
2. This procedure assumes basic familiarity with hand tools and furniture terminology: no specialized training is required
3. All materials removed and disassembled shall be sorted and segregated with like materials and disposed of or recycled according to recycling availability or waste acceptance
4. For items to be recycled, refer to KI's End of Life Recycling Matrix and KI's End of Life Recovery Options Matrix, available at www.ki.com


Required Tools




Gloves




Safety Glasses




Utility Knife




Hex Socket Wrench



Pry Bar



Putty Knife



#2 Philips Screwdriver