

Assembly Instructions ■

Tattoo™ Booth Table

August 2018

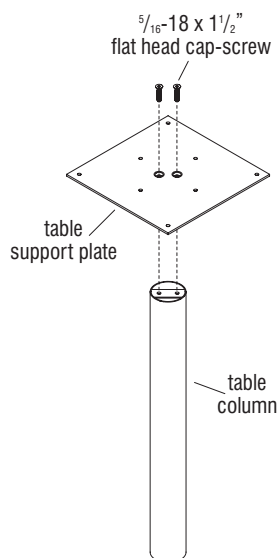


Figure 1

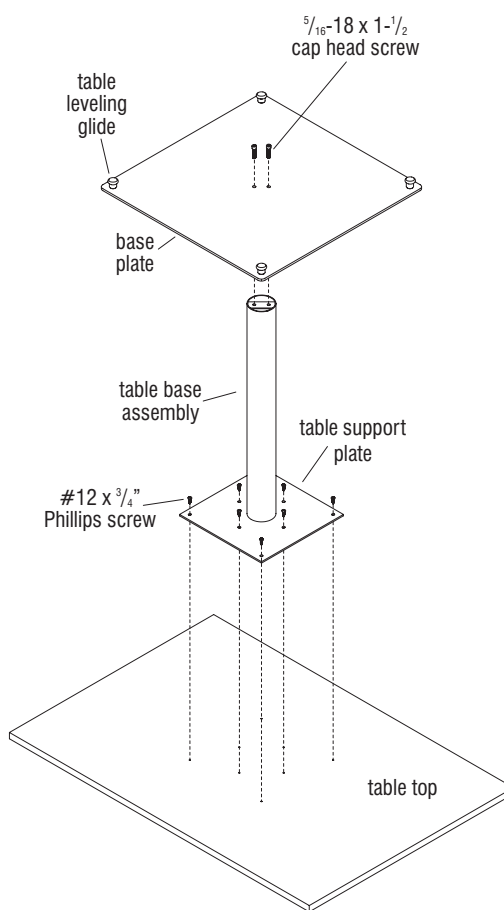


Figure 2



Assemble units as described herein only. To do otherwise may result in instability. All screws, nuts and bolts must be tightened securely and must be checked periodically after assembly. Failure to assemble properly, or to secure parts may result in assembly failure and personal injury.

Tools Required:

- 3/16" hex driver
- 1/4" hex driver

1. Carefully remove contents from packaging and view Figures 1 & 2 to familiarize yourself with the table base parts. The table support plate ships attached to the base plate with two shipping bolts and nuts. Disassemble the two plates and discard the shipping bolts and nuts.
2. Position the table support plate as illustrated over the table column. Make sure the tapered, counter-sunk holes in the plate are facing up for the screw heads to nest into. Attach the plate to the column using two 5/16-18 x 1 1/2" flat head cap-screws provided. Using a 3/16 hex driver, tighten screws to between 20 and 25 foot pounds of force (Figure 1).
3. Carefully flip the table column assembly over so the table support plate is down. Position the base plate over the table column as illustrated, aligning the mounting holes in the base plate with the threaded strap in the column. Insert two 5/16-18 x 1 1/2" cap screws through the plate and twist into the column. Use a 1/4" hex driver to tighten the cap head screws between 20 and 25 foot pounds of force (Figure 2).
4. Carefully set table top upside down onto a soft, protective surface. Position the table support plate of the table base assembly over the appropriate pre-drilled hole pattern in the underside of the top. Secure using eight #12 x 3/4" Phillips pan head screws. Do not over-tighten (Figure 2).
5. Carefully turn table assembly to the upright position at its use location. Adjust table leveling glides as needed to level and stabilize the table (Figure 2).