

# Installation Instructions

Shelf/Cabinet Task Light  
Models UTLN, UTLV and UTLE

April 2004

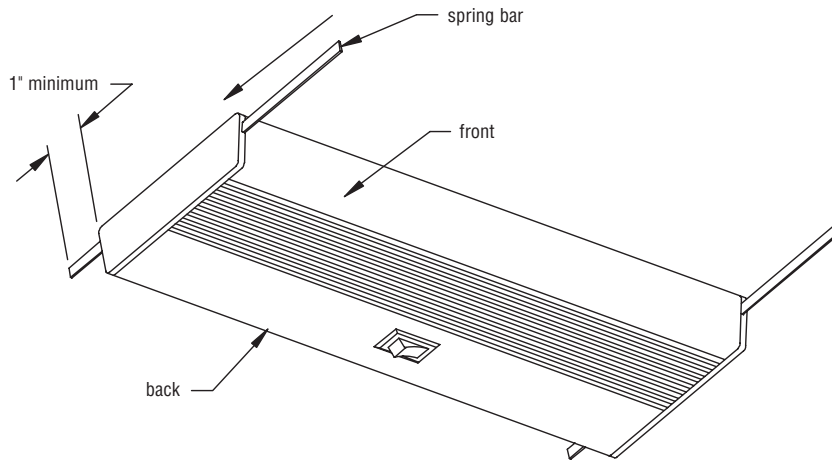


Figure 1

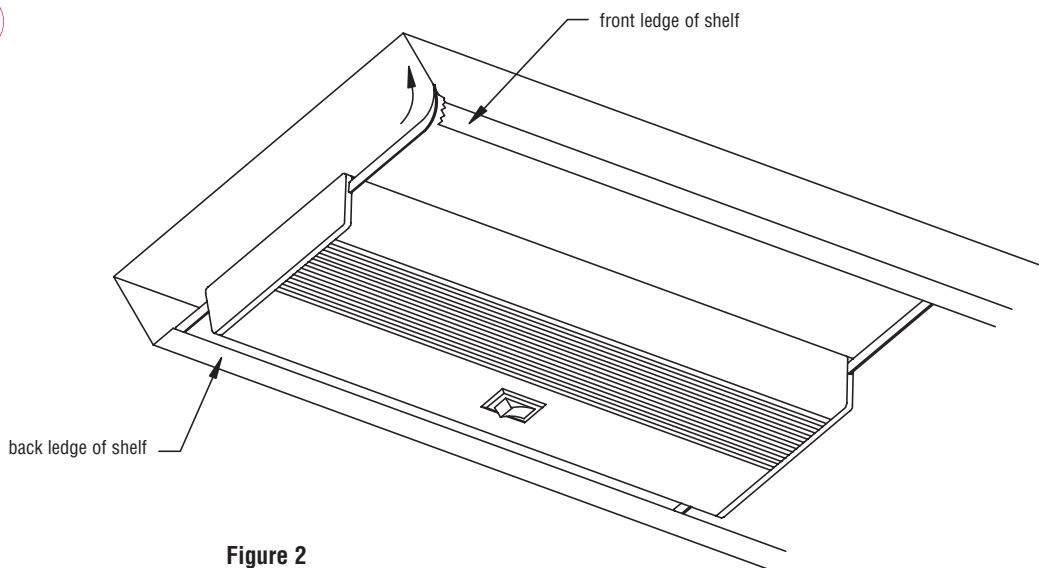


Figure 2

## Spring Bar Mounting

1. Insert spring bar through slots located at each end of the light fixture. Leave at least 1" of bar extending past the back of the light fixture (Figure 1).
2. Rest the spring bars on the back ledge of the shelf.
3. Bend the spring bars sideways to clear the front ledge. Rotate the light fixture up against the shelf and release the spring bars (Figure 2).
4. Once the light fixture is mounted, the light can be adjusted to personal preference (left, right, right, front and back).



CAUTION

Assemble units as described herein only. To do otherwise may result in instability. All screws, nuts and bolts must be tightened securely and must be checked periodically after assembly. Failure to assemble properly, or to secure parts may result in assembly failure and injury.

