


# Repair & Replacement Instructions ■

Sway™ Lounge Collection

Table & Ottoman

September 2015

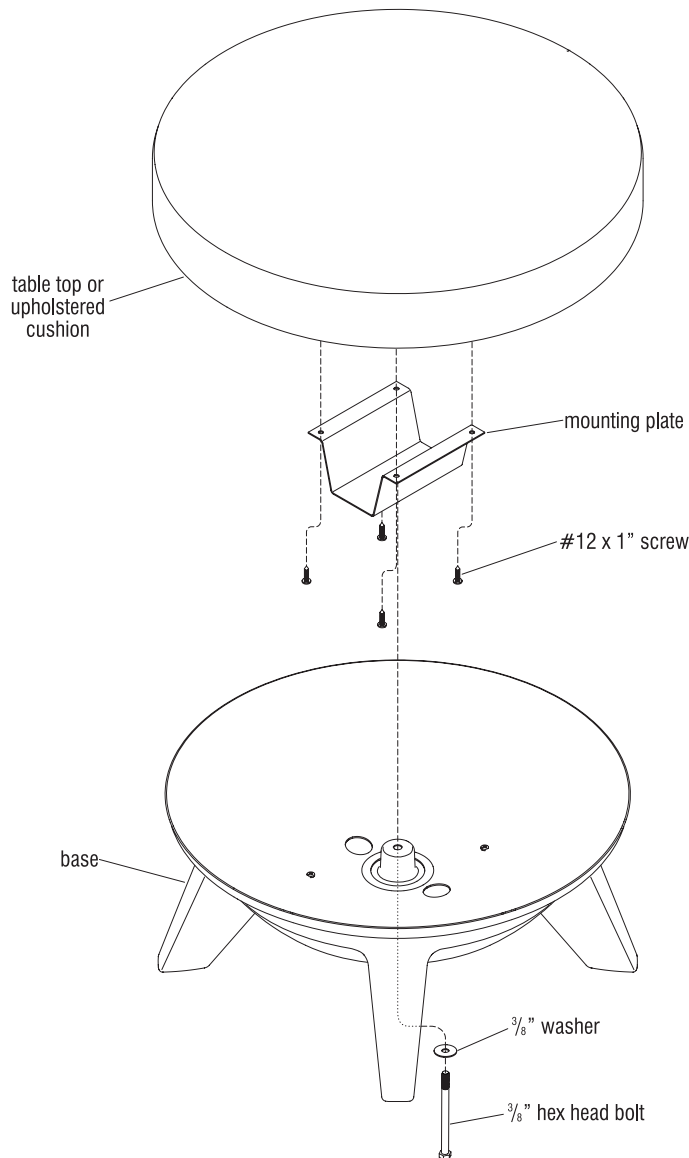

## Tools Required:

- $\frac{9}{16}$ " Socket Wrench
- Screwdriver

## Table Top or Upholstered Cushion Replacement

1. Loosen the  $5\frac{1}{2}$ " long  $\frac{3}{8}$ " hex bolt and flat washer from the bottom of the base. Lift off the damaged table top or ottoman cushion and set aside.
2. With the old table top or cushion separate from the base, remove the mounting plate by un-installing the #12 x 1" screws. Save the bracket and screws for reuse on the replacement top/cushion.
3. Turn the new replacement top/cushion over and place it on a soft protective surface. Align the mounting plate with the pre-drilled holes on the underside of the new top/cushion and attach the plate using the #12 x 1" screws removed in the previous step.
4. Next, align the top/cushion to the base and reinstall the  $\frac{3}{8}$ " hex head bolt and flat washer.



Assemble units as described herein only. To do otherwise may result in instability. All screws, nuts and bolts must be tightened securely and must be checked periodically after assembly. Failure to assemble properly, or to secure parts may result in assembly failure and personal injury.

