

PRODUCT SPECIFICATIONS ■

Bobbr™ Undermount Storage

June 2022

TECHNICAL SPECIFICATIONS

General Undermount

Bobbr Undermount Storage units mount directly to the underside of a worksurface to provide storage space. The unit is supported entirely from the worksurface, allowing it to move freely with adjustable-height desks for maximum user convenience. A fully loaded unit may weigh 58.1 lb.

Shells are symmetrical. Drawers and doors feature a push-to-open mechanism which can be configured when ordered, or ordered later and installed in the field. Installation does not require any specialized tools. Door hand can be easily reconfigured in the field.

The drawer, fixed shelf, and unit bottom feature a felt pad to gently store items.

A perforated hole pattern on 1" centers allows users to hang accessories or other standard pegboard style components from the unit. These perforations also provide air ventilation.

Unit Construction

Each unit is constructed primarily of steel. The shell consists of 16-gauge steel body and a 20-gauge steel fixed shelf. The drawer, hanging shelf and cubby door are constructed of 20-gauge steel.

Finish

Components are finished with an electrostatically applied hybrid epoxy powder-coat paint. All standard KI powder-coat finishes are available. When configured with drawers or cubby doors, these options may be specified to a different color than the shell at no extra charge.

USB Charging Port

Storage units may be ordered with a USB-A charging port, accessible at the upper left-hand or right-hand exterior of the unit. The charging port is mounted inside the unit, under the fixed shelf and the cable exits through a 3/4" hole at the rear of the storage unit and attaches to a 10.5-watt power converter. The power converter comes standard with the cable and plugs into a standard power receptacle. Alternately, the charging port may be connected to a computer for power and data transfer, with a maximum data transfer rate of 480Mb/s.

Hanging Metal Shelf

A 9⁵/₈" wide by 13¹/₈" deep shelf may be added later as an option. The hanging shelf features integrated reinforcements which allow letter-sized hanging holders to be mounted side-to-side underneath. No tools are required for hanging metal shelf assembly.

P-Series Locks


When configured with a drawer or cubby door, storage units feature a P-Series lock. P-Series locks are a high security double-bit lock system, with master key-able lock cores. The lock cores are randomly keyed.

Compliance

Bobbr Undermount Storage is designed and manufactured to meet or exceed required ANSI/BIFMA x5.9-2019.



DIMENSIONS - External Unit Dimensions

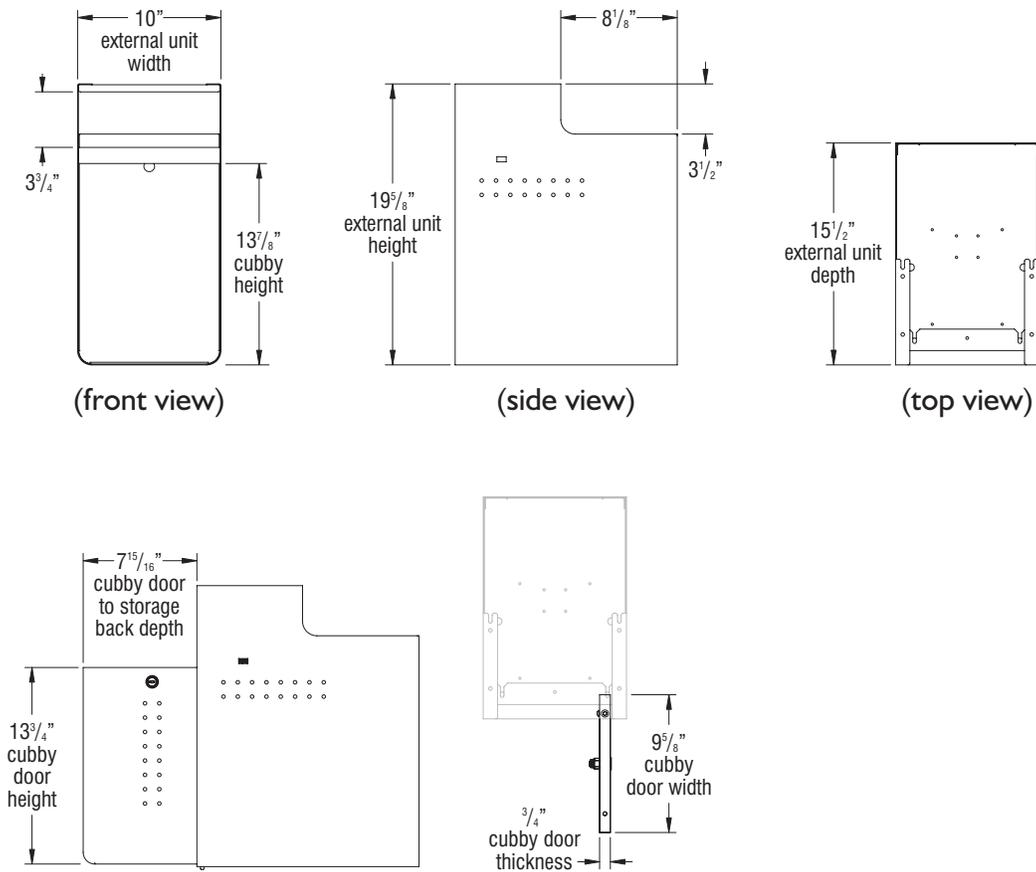


Note: When mounted under a 29" high table with 1³/₁₆" thick worksurface, there is 8" clearance under the Bobbr unit.

CODE COMPLIANCE




DIMENSIONS - Internal Unit Dimensions

Fixed Shelf

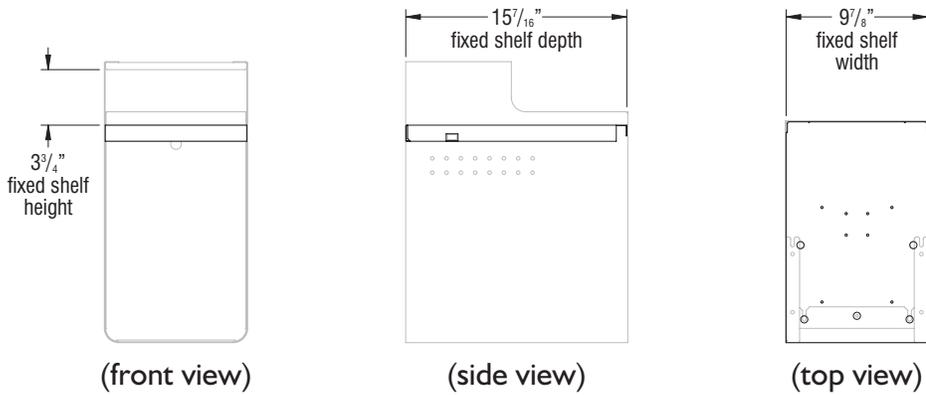


Note: These dimensions are for the unit only, components under the desk worksurface may reduce these values.

Drawers

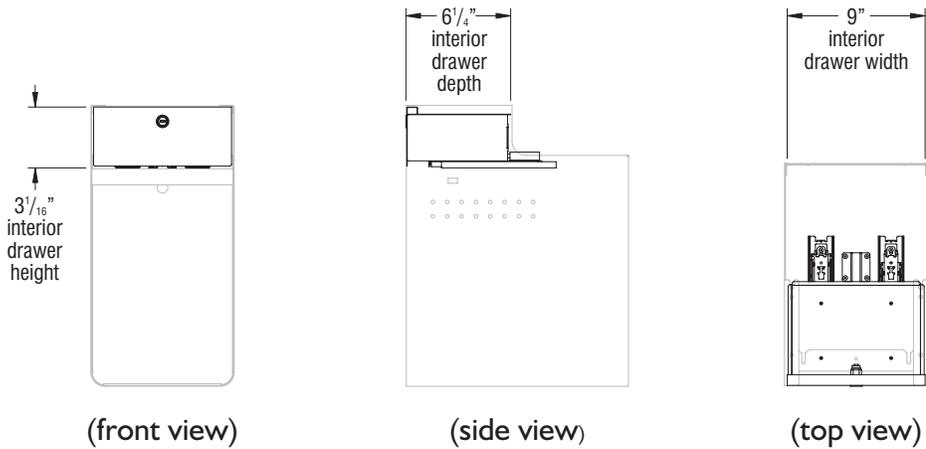

Note: When a door is added, the usable depth behind the door is $13\frac{3}{4}$ ".

Hanging Shelf

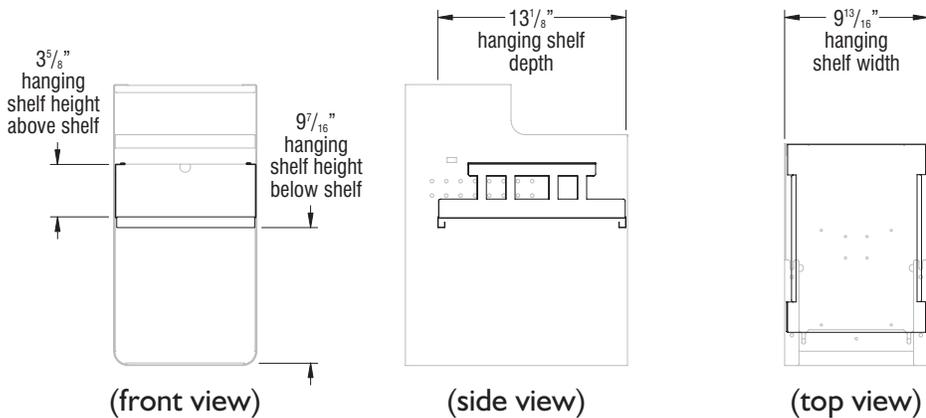


CODE COMPLIANCE




STATEMENT OF LINE


Bobbr Storage Unit




Bobbr Open Top Shelf &
Open Cubby Undermount Storage
BOBR10162000



Bobbr Top Drawer &
Open Cubby Undermount Storage
BOBR101620D0




Bobbr Top Drawer & Cubby
with Door Undermount Storage
BOBR101620DC




Bobbr Top Shelf & Cubby
with Door Undermount Storage
BOBR1016200C


Accessories




1" Hook




2" Hook




4" Cup




Hanging Metal Shelf



Top Drawer Kit



USB-A Cable with
10.5-watt Power Converter



Cubby Door Kit

CODE COMPLIANCE

