
Assembly Instructions ■

Ruckus® Tote Storage

Tote Lid

July 2019



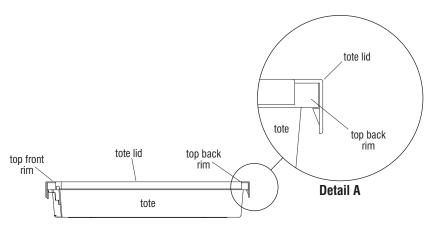


Figure 2



Assemble units as described herein only. To do otherwise may result in instability. All screws, nuts and bolts must be tightened securely and must be checked periodically after assembly. Failure to assemble properly, or to secure parts may result in assembly failure and personal injury.

Note: The instructions below outline the assembly of an optional tote lid to a tote. The lid is designed with a front and back side as illustrated in Figure 1, and can only be assembled with the front of the tote lid connecting to the front of the tote and the back of the lid connecting to the back of the lid connecting to the tote. If the lid is oriented incorrectly, the lid will not fit in the tote opening and cannot attach to the top rim of the tote.

- Orient the tote lid over the tote opening as illustrated, so the front of the lid is over the top front rim and the back of the lid is over the top back rim (Figure 1).
- 2. Set the lid on top of the tote opening and snap the front and back of the lid over the top rim (Figure 2 & Detail A).

