

Parts Diagram


Storage Cupboard Doors & Lock

November, 1993


KI
1330 Bellevue Street
P.O. Box 8100
Green Bay, Wisconsin 54308-8100

TEL (414) 468-8100
FAX (414) 468-0280

KEY	Part #	Description	KEY	Part #	Description
1	62960	Top Pin Hinge Plate 30" - Right	2	62961	Top Pin Hinge Plate 30" - Left
	62962	Top Pin Hinge Plate 36" - Right		62963	Top Pin Hinge Plate 36" - Left
	62964	Top Pin Hinge Plate 42" - Right		62965	Top Pin Hinge Plate 42" - Left
3	62958	Top Hinge Pin Assembly	4	20573	Nylon Bushing
5	62980	Outstop Wire	6A	20571	Door Latch (For Part 1)
7	20091	#8 x 1/2" Type F Screw	6B	20571	Door Latch (For Part 2)
9	62978	Bottom Hinge Pin Assembly	8	20171	#10 x 1/2" Type AB Screw
11	62985	Lock Adapter	10	62986	Hinged Pin Lock
13	20522	Key Plug	12	20524	Lock Body 90° Pin Cam
15	62981	Wire Retainer	14	62506	30" W x 26 1/4" H Door

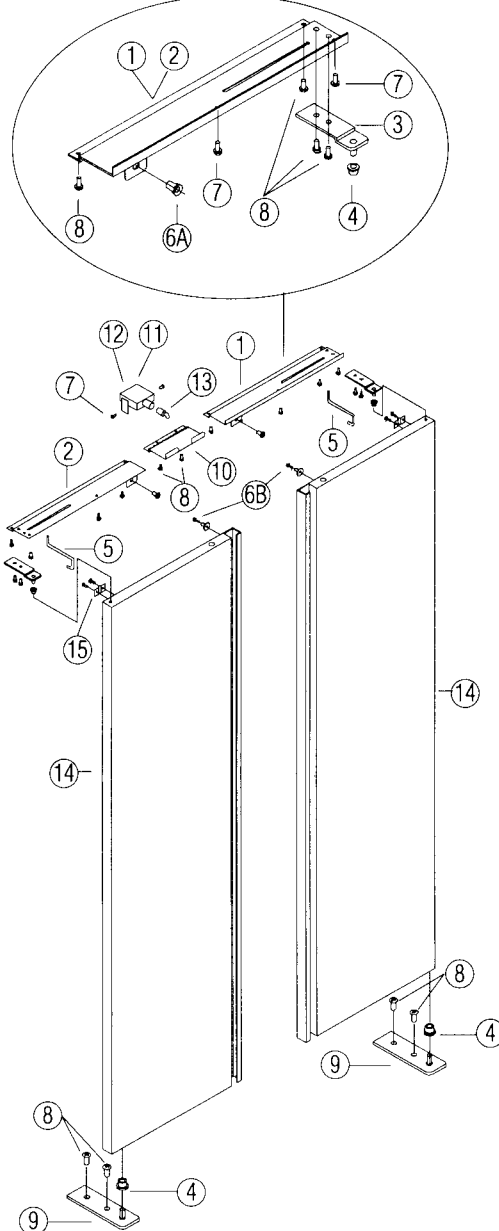

Note: Doors can be right or left installed.

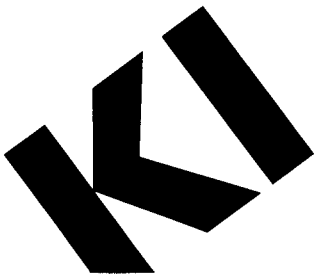

Installation and Removal

Cupboard Door Hinge Pin

November, 1993

KI
1330 Bellevue Street
P.O. Box 8100
Green Bay, Wisconsin 54308-8100

TEL (414) 468-8100
FAX (414) 468-0280

Refer to front page for Part # identification.

Removal

1. Open either door, remove wire retainer (Part #15), then remove both screws from the bottom hinge pin assembly (Part #9).
2. In the open position, grasp the door securely and pull it away from the bottom of the cabinet. The bottom hinge pin assembly (Part #9) will fall away and the door will be free from the cabinet.
3. Set the door aside and repeat for the other door.
4. Remove the screws holding the top hinge pin assembly (Part #3).

Installation

1. Install both top hinge pin assemblies (Part #3).
2. Ensure that nylon bushings (Part #4) are in the top and bottom of each door.
3. Place the bottom hinge pin assembly (Part #9) into one door. Grasp the door, set the door onto the top hinge pin assembly (Part #3). Rotate the door into the cabinet with the bottom pin assembly (Part #9) in place.
4. Align the bottom pin assembly (Part #9) with the holes in the cabinet and mount the bracket to the cabinet with the supplied screws (Part #8).
5. Door adjustment can be accomplished by loosening the appropriate screws and moving the assembly(s) in the oblong holes.
Note: The cabinet must be level before attempting adjustment.
6. Install wire retainers (Part #15).

