

Assembly Instructions

KI 700 Series Bevelled Desk Bridge

August 1997

KI Pembroke
P.O. Box 580
1000 Olympic Drive
Pembroke, Ontario
K8A 6X7

TEL (613) 735-5566
FAX (613) 735-3333

Components



- 1 - Bevelled Desk Bridge
- 2 - Modesty Panel
- 3 - Wire Management Channel
- 4 - Level or Step Connector

Tools Required

- Phillips Screwdriver

Hardware Parts List


- (12) #20162 - #8 x 1/2" Screws
- (12) #20192 - #14 x 7/8" Screws

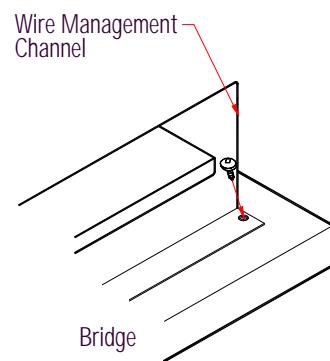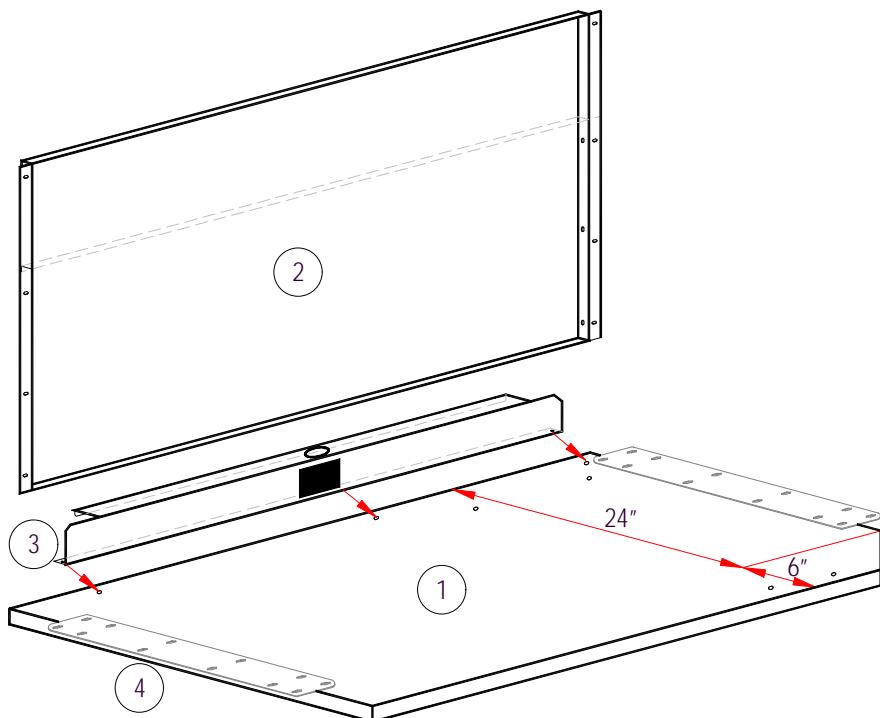


Detail A

1. To avoid scratching worksurface, place face down on a protective surface.
2. Position wire management channel on worksurface, product label facing inward. Secure in place with (3) # 8 x 1/2" screws (Detail A).
3. Position freestanding worksurfaces appropriate distance apart to receive bridge.
4. Turn desk bevelled bridge assembly over, positioning on level connectors. Secure in place with (6) #14 x 7/8" screws.
5. Position modesty panel between freestanding worksurfaces. Lining up with holes in end panels, drive (3-4)* #8 x 1/2" screws in either end to fasten components together.

* (3) - #8 x 1/2" screws - partial modesty panel
(4) - #8 x 1/2" screws - full modesty panel



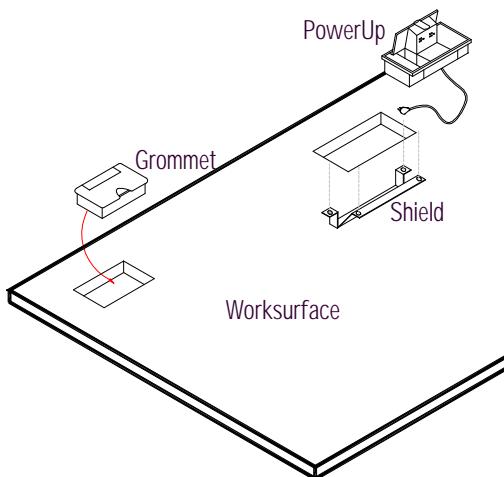

Installing Grommets & PowerUp

Hardware Parts List

(4) #20162 - #8 x 1/2" Screws

1. Press worksurface grommets into wireway holes in worksurface.

PowerUp Only

2. Route cord through the hole in the worksurface. Snap the PowerUp option into the hole in worksurface.
3. Install PowerUp shield to underside of worksurface using (4) #8 x 1/2" screws.



Assemble units as described herein only. To do otherwise may result in instability. All screws, nuts and bolts must be tightened securely and must be checked periodically after assembly. Failure to assemble properly, or to secure parts may result in assembly failure and injury.