

Assembly Instructions

KI 700 Series Desk Corner Unit

August 1997

KI Pembroke
P.O. Box 580
1000 Olympic Drive
Pembroke, Ontario
K8A 6X7

TEL (613) 735-5566
FAX (613) 735-3333

Components



- 1 - Worksurface
- 2 - End Panel
- 3 - Modesty Panel
- 4 - Corner Column
- 5 - Wire Management Channel

Tools Required


- Phillips Screwdriver
- 3/8" Socket/Wrench

Hardware Parts List

- (24) #20162 - #8 x 1/2" Screws
- (6) #20192 - #14 x 7/8" Screws
- (8) #20203 - 10-16 x 1/2" Self Drilling Screws
- (5) #20425 - Hex Glides

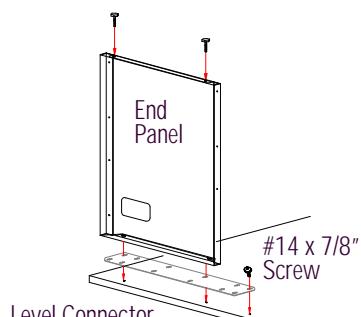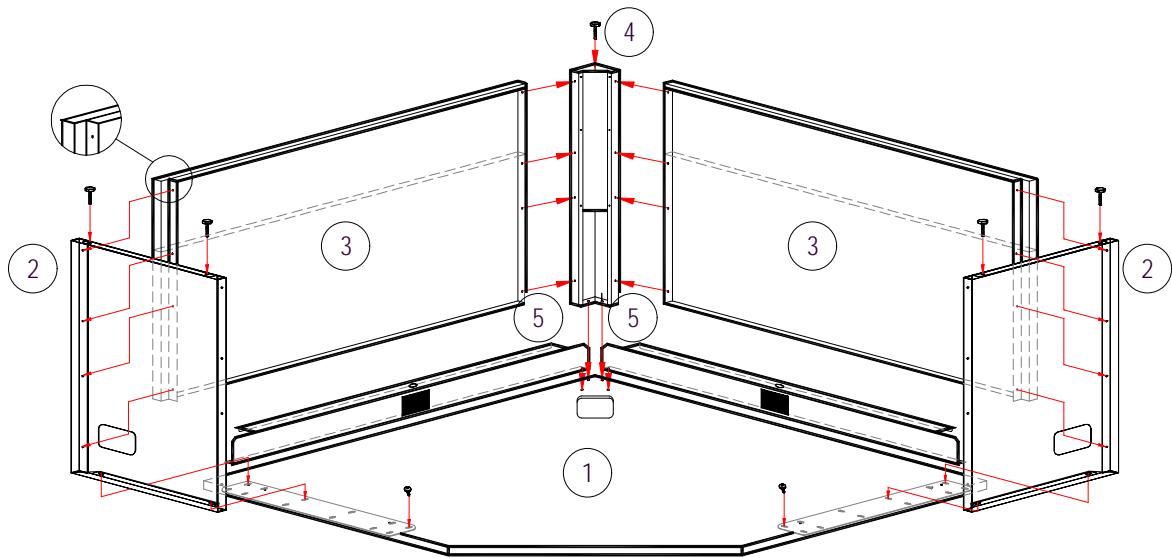


Detail A

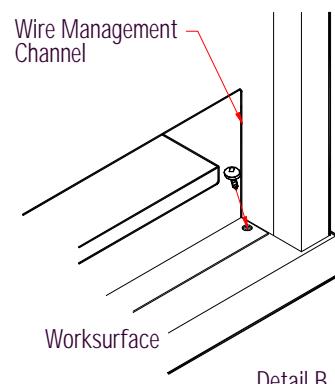


Detail B

1. To avoid scratching worksurface, place face down on a protective surface.
2. If attaching bridge/return, align level connector (shipped with bridge/return) with holes in worksurface. Place end panel on level connector and secure in place with (3) #14 x 7/8" screws (Detail A). Repeat for opposite end.
3. Using (2) #14 x 7/8" screws attach corner column to underside of top.
4. Position modesty panel between end panel and corner panel. Note: Double flanged end of modesty panel attaches to end panel. Aligning holes use (6-8)* #8 x 1/2" screws to attach modesty panel to corner column and end panel. Repeat for next modesty panel.
5. Place wire management channel on worksurface, product label facing inward, align holes with predrilled holes in worksurface. Secure in place using (3) #8 x 1/2" screws (Detail B). Repeat for next wire management channel.

* (6) - #8 x 1/2" screws partial modesty panel
(8) - #8 x 1/2" screws full modesty panel



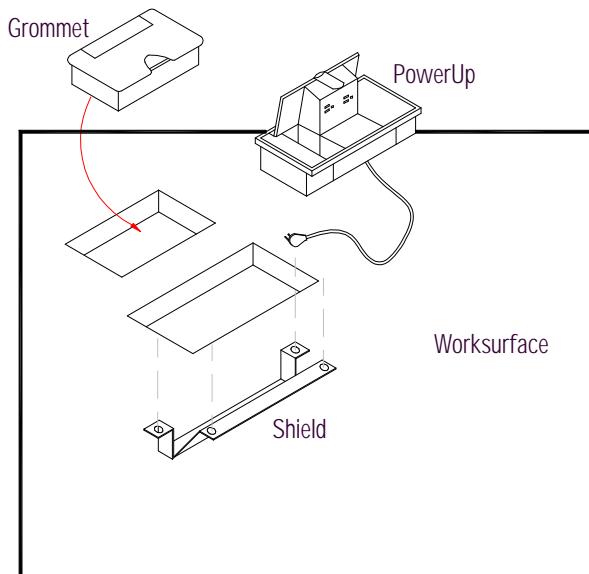

Installing Grommets & PowerUp


Hardware Parts List

(4) #20162 - #8 x 1/2" Screws

1. Press worksurface grommets into wireway holes in worksurface.

PowerUp Only

2. Route cord through the hole in the worksurface. Snap the PowerUp option into the hole in worksurface.
3. Install PowerUp shield to underside of worksurface using (4) #8 x 1/2" screws.

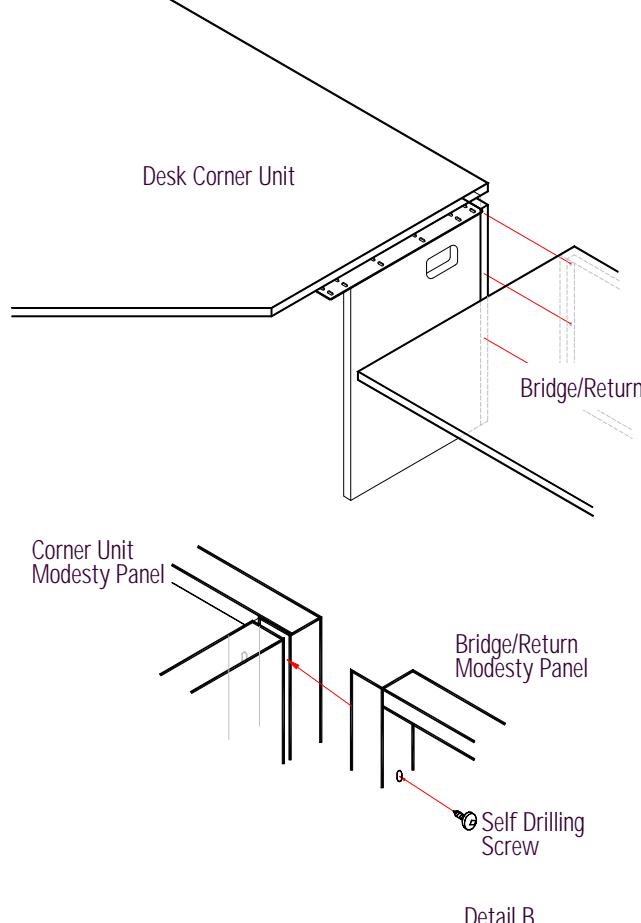

Attaching Bridge/Return to Corner Unit

1. Slide Bridge/Return modesty panel flange between corner unit end panel and modesty panel. Fasten with (3-4)* self drilling screws (Detail B). Note: There are no pilot holes in the corner unit modesty panel.

2. Place Bridge/Return on level connector previously attached to corner unit. Use (2) #14 x 7/8" screws to attach.

3. Level Bridge/Return by adjusting hex glides.

* (3) - 10-16 x 1/2" Self Drilling Screws for partial modesty panel

(4) - 10-16 x 1/2" Self Drilling Screws for full modesty panel



Assemble units as described herein only. To do otherwise may result in instability. All screws, nuts and bolts must be tightened securely and must be checked periodically after assembly. Failure to assemble properly, or to secure parts may result in assembly failure and injury.