


Disassembly Instructions

C-Table™



Material Type: A. STEEL B. WOOD C. PLASTIC

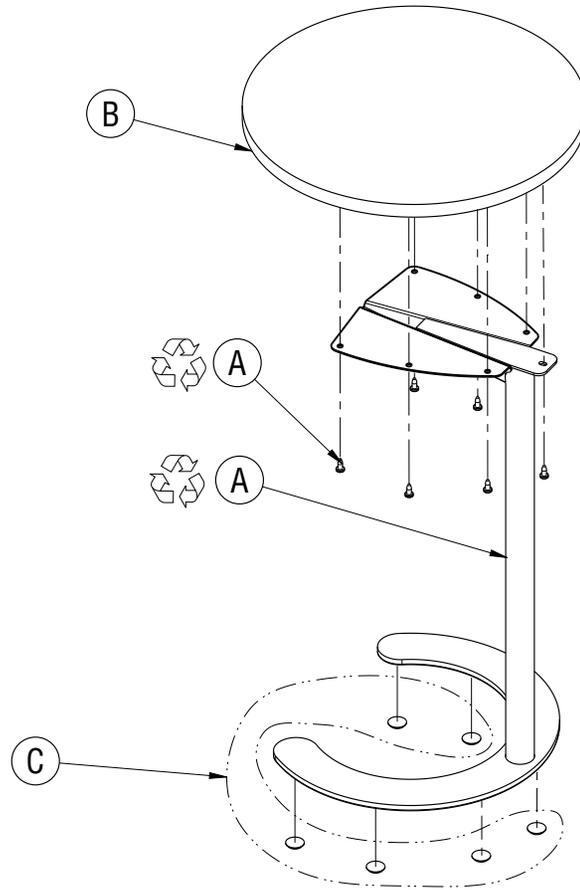

Procedure:

1. Remove the screws holding the table top to the base using a phillips screwdriver.
2. Pry the domed plastic glides from the bottom of the steel base recesses using a flat blade screwdriver.

General Notes:

1. Disassembly time: 5-10 minutes
2. This procedure assumes basic familiarity with hand tools and furniture terminology; no specialized training is required
3. All materials removed and disassembled shall be sorted and segregated with like materials and disposed of or recycled according to recycling availability or waste acceptance



4. For items to be recycled, refer to KI's End of Life Recycling Matrix and KI's End of Life Recovery Options Matrix, available at www.ki.com

Required Tools




Gloves



Safety Glasses



Flat Screwdriver



Phillips Screwdriver