

PALMA
SYMMETRY


STONESOURCE

PALMA SYMMETRY

Color Availability



White

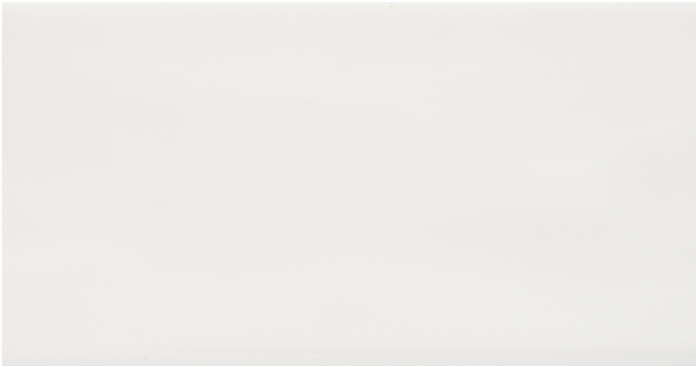

Albar



Taupe



Pearl



Dark



Grey




Black




Black Elongated Hexagon Wall Tile

Images shown are for representation purposes only. Actual colors may vary.


Porcelain Mosaics




Mosaic 12"x12"
(2"x2"pcs)
Finish: Satin Matte




Hexagon Mosaic 12"x11"
(2"pcs)
Finish: Satin Matte




Elongated Hexagon Mosaic 11"x10"
Finish: Glossy




Picket Mosaic 10"x11"
Finish: Glossy



Beveled Mosaic 12"x12"
(2"x4"pcs)
Finish: Glossy




Flat Mosaic 12"x12"
(2"x4"pcs)
Finish: Glossy




Fan Mosaic 10"x11"
Finish: Glossy


Ceramic Mosaics




Triangle Mosaic 12.5"x11"
Finish: Glossy



Diamond Mosaic 10.5"x13"
Finish: Glossy



Picket Mosaic 11.5"x11"
Finish: Glossy



Soldier Stack Mosaic 12"x12"
(1"x4"pcs)
Finish: Glossy



Herringbone Mosaic 11"x11"
(1"x4"pcs)
Finish: Glossy

PALMA SYMMETRY

Ceramic Wall




4"x16"

Finish: Glossy




4"x12"

Finish: Glossy



Bead Trim 1"x12"

Finish: Glossy



Elongated Hexagon 3"x8"

Finish: Glossy

Technical Specifications

Test	Standard Requirements	Porcelain	Ceramic	Mosaic
Water Absorption UNI EN ISO 10545-03	<0.5%	≤0.5%	>10-18%	>10-18%
Breaking Strength UNI EN ISO 10545-04	Minimum: 1300 N	≥700 N	>600 N	N/A
Modulus of Rupture UNI EN ISO 10545-04	Minimum: 35 N/ mm ²	≥70 N/mm ²	>12 N/mm ²	>45 N/mm ²
Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: e >0.55	N/A	Resistant	Resistant
Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm3	N/A	N/A	Unglazed Tiles Only
Thermal Linear Expansion UNI EN ISO 10545-08	Minimum for Floor Applications: Class 3	<7x10 ⁻⁶ °C	N/A	<7x10 ⁻⁶ °C-1
Thermal Shock Resistance UNI EN ISO 10545-09	Resistant	Resistant	Resistant	Resistant
Moisture Expansion UNI EN ISO 10545-10	As Reported	N/A	N/A	N/A
Frost Resistance UNI EN ISO 10545-12	As Reported	Indoor Use	N/A	N/A
Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: UB/ GB Acids and Alkalis: As Reported	Class A	Min. Class B	Class GA(V)
Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	Glossy: Class 5 Grip: Class 4	Class 4 & 5	Class 5
PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	IV	N/A	N/A
Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: ≥0.42	>0.42	N/A	N/A
Shade Variation	As Reported	V0	V0	V0



White Fan Porcelain Mosaic

SHOWROOMS

Atlanta

1465 Chattahoochee
Ave. NW, Suite 400 & 450
Atlanta, GA 30318

Chicago

205 West Wacker Drive,
Suite 422
Chicago, IL 60606

Dallas

133 Payne Street
Dallas, Texas 75207

East Hampton

34 Park Place
East Hampton, NY 11937

Houston

4900 Woodway Dr.
Houston, TX 77056

Nashville

2930 Sidco Dr.
Nashville, TN 37204

New Jersey

350 Starke Rd.
Carlstadt, NJ 07072

New York

215 Park Ave. South
New York, NY 10003

Washington, DC

1129 20th St. NW
Washington, DC 20036