



FIORANO USA  
GRANITESTONE

STONESOURCE


## COLOR



## SIZES

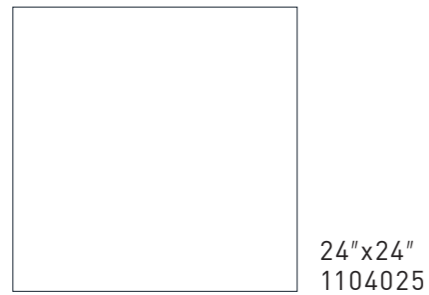

## MOSAIC

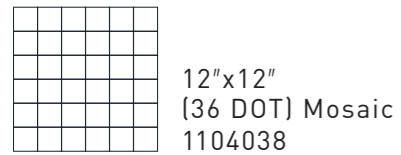


# WHITE


## COLOR



## SIZES



## MOSAIC

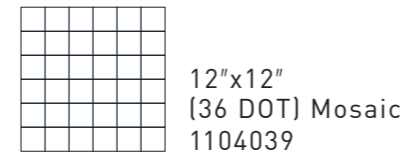



# CLAY

Colors shown may vary from actual product.  
Final selection should be made from actual product samples.


## COLOR



## SIZES

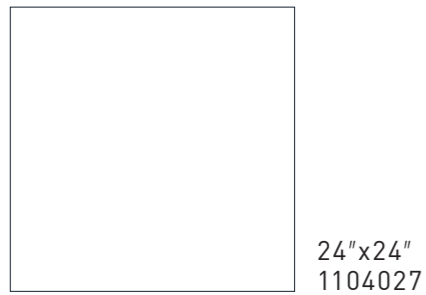

## MOSAIC

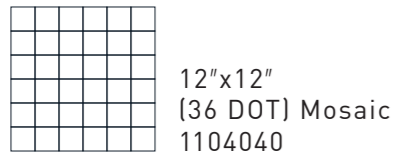


# STEEL


## COLOR



## SIZES



## MOSAIC

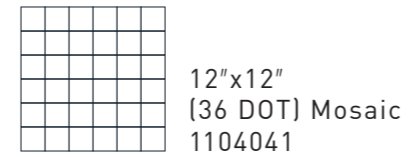

# BLACK

Colors shown may vary from actual product.  
Final selection should be made from actual product samples.





Wall: \_12"x12" [36 DOT] Mosaic\_White\_Matte Floor:  
\_24"x24" \_White\_Matte



Wall: \_12"x12" [36 DOT] Mosaic\_Clay\_Matte



Wall: \_12"x24"\_Clay\_Matte Floor:  
\_24"x24"\_Clay\_Matte



Accent: JEM\_48"x110"\_Forte White\_Matte

Floor: \_24"x24"\_Steel\_Matte



Wall: \_12"x12" (36 DOT) Mosaic\_Steel\_Matte


















Wall: \_12"x12" (36 DOT) Mosaic\_Black\_Matte Floor:  
\_24"x24" \_Clay\_Matte



Wall: Urban Living\_3"x12"\_Pure\_Glossy  
Floor: \_24"x24"\_Black\_Matte

# Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%	
		ASTM C373	0.5%	Meeting the water absorption criteria of the American national standard PTCA	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42 WET	≥0.42 WET	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH	ASTM C648	≥250 lbf	8mm ≥300 lbf 10mm ≥400 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

# Packaging Specifications

SIZES		THICKNESS (MM)	PIECES PER BOX	UOM PER BOX	WEIGHT PER BOX	BOXES PER PALLET	UOM PER PALLET	WEIGHT PER PALLET*
FIELD TILES								
12"x24"	NOMINAL	8 mm	8	16 SF	54.4 LBS	48	768 SF	2,611.2 LBS
24"x24"	NOMINAL	8 mm	4	16 SF	54.4 LBS	36	576 SF	1,958.4 LBS
MOSAICS								
12"x12" [2"x2" 36 DOT] Mosaic	NOMINAL	8 mm	10	10 PCS	33 LBS	45	450 PCS	1,485 LBS

\* WEIGHT PER PALLET DOES NOT INCLUDE PALLET WEIGHT ITSELF.  
ALL OTHER SIZES WILL BE PACKAGED AS ORDERED.  
PLEASE CONTACT CUSTOMER SERVICE AT 1-877-356-7461 FOR PACKAGING INFORMATION.

MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16") IF STAGGERED TILE PLACEMENT, WE RECOMMEND USING A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").



STONESOURCE