

FIORANO USA
HOMESTEAD

STONESOURCE

Fiorano USA Homestead


A Connection to Nature



Biophilic design, reflecting biophilia, meaning the love of life and living things, is an approach to spaces, places, and environments with a connection to the natural world. Fiorano USA Homestead, emulating the natural beauty of stone, encourages that same connection by adding a touch of nature to any design.



Millstone

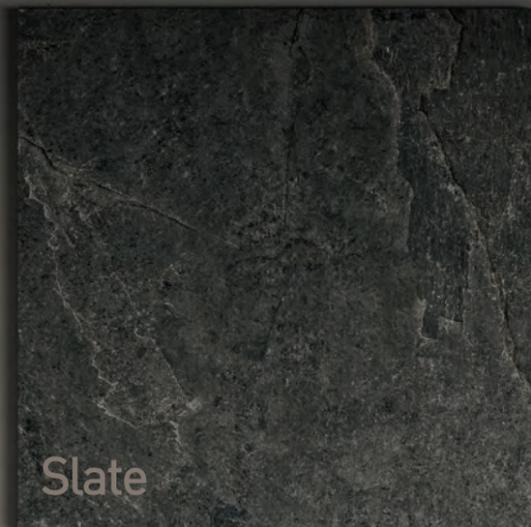

Slate



Alabaster



Pewter


4 colors



sizes


4 indoor

12"x24"
24"x48"
48"x48"

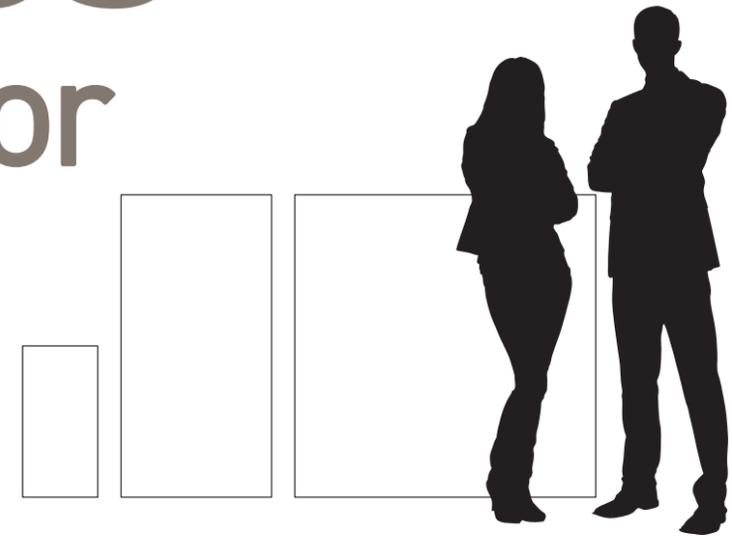


2 outdoor porcelain pavers


24"x24"
24"x48"
≅ 2 cm

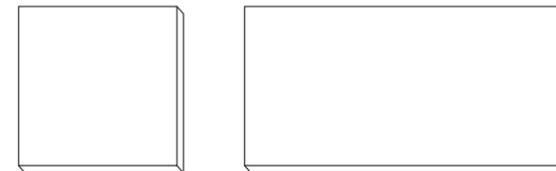

3 mosaics


8.7"x12"
Tetris Mosaic


12"x12" Brick
Mosaic


12"x12" Mosaic
2"x2" -36 (DOT)

SLATE



1104201
RECTIFIED MATTE 12"x24"

1104189
RECTIFIED MATTE 24"x48"

1104276
RECTIFIED MATTE 48"x48"

1104213
TETRIS MOSAIC RECTIFIED
MATTE 8.7"x12"

1104209
MOSAIC (2"x2"-36 DOT)
RECTIFIED MATTE 12"x12"

1104205
BRICK MOSAIC RECTIFIED
MATTE 12"x12"

1104217
BULLNOSE
RECTIFIED MATTE 3"x12"

 2 cm

1104243
RECTIFIED MATTE 24"x24"

1104238
RECTIFIED MATTE 24"x48"

MILLSTONE



1104200
RECTIFIED MATTE 12"x24"

1104188
RECTIFIED MATTE 24"x48"

1104275
RECTIFIED MATTE 48"x48"

1104212
TETRIS MOSAIC RECTIFIED
MATTE 8.7"x12"

1104208
MOSAIC (2"x2"-36 DOT)
RECTIFIED MATTE 12"x12"

1104204
BRICK MOSAIC RECTIFIED
MATTE 12"x12"

1104216
BULLNOSE
RECTIFIED MATTE 3"x12"

 2 cm

1104242
RECTIFIED MATTE 24"x24"

1104237
RECTIFIED MATTE 24"x48"

PEWTER



1104199
RECTIFIED MATTE 12"x24"

1104187
RECTIFIED MATTE 24"x48"

1104274
RECTIFIED MATTE 48"x48"

1104211
TETRIS MOSAIC RECTIFIED
MATTE 8.7"x12"

1104207
MOSAIC (2"x2"-36 DOT)
RECTIFIED MATTE 12"x12"

1104203
BRICK MOSAIC RECTIFIED
MATTE 12"x12"

1104215
BULLNOSE
RECTIFIED MATTE 3"x12"

 2 cm

1104241
RECTIFIED MATTE 24"x24"

1104236
RECTIFIED MATTE 24"x48"

ALABASTER



1104198
RECTIFIED MATTE 12"x24"

1104186
RECTIFIED MATTE 24"x48"

1104273
RECTIFIED MATTE 48"x48"

1104210
TETRIS MOSAIC RECTIFIED
MATTE 8.7"x12"

1104206
MOSAIC (2"x2"-36 DOT)
RECTIFIED MATTE 12"x12"

1104202
BRICK MOSAIC RECTIFIED
MATTE 12"x12"

1104214
BULLNOSE
RECTIFIED MATTE 3"x12"

 2 cm

1104240
RECTIFIED MATTE 24"x24"

1104235
RECTIFIED MATTE 24"x48"

surface

matte / rectified





Floor 48"x48"_Pewter_Matte





Floor 48"x48" _Millstone_Matte



Wall 24"x48" _Alabaster_Matte
Floor 8.7"x12" _Pewter_Tetrakis_Mosaic_Matte



Floor 48"x48"_Millstone_Matte



Floor 24"x48" Alabaster Porcelain Pavers 2CM



Floor 24"x48" Pewter Porcelain Pavers_2CM

Rectified-color body

COLOR BODY



Colors	SLATE	MILLSTONE	PEWTER	ALABASTER
12"x24" 8 mm	1104201	1104200	1104199	1104198
24"x48" 8 mm	1104189	1104188	1104187	1104186
48"x48" 8 mm	1104276	1104275	1104274	1104273
24"x24" 2 cm	1104243	1104242	1104241	1104240
24"x48" 2 cm	1104238	1104237	1104236	1104235
8.7"x12" 8 mm Tetris Mosaic	1104213	1104212	1104211	1104210
12"x12" 8 mm Mosaic (2"x2"-36 DOT)	1104209	1104208	1104207	1104206
12"x12" 8 mm Brick Mosaic	1104205	1104204	1104203	1104202
3"x12" 8 mm Bullnose	1104217	1104216	1104215	1104214



See corresponding Porcelain Slab line;
Epic Homestead
Scan for more details

Technical Specifications

STONESOURCE

This product meets or exceeds all standards described in ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%	
	CERTIFIED PORCELAIN TILE 0.5% or less water absorption	ASTM C373	0.5%	Meeting the water absorption criteria of the American national standard PTCA	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.		ALL RESIDENTIAL / COMMERCIAL
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.		NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42 WET	≥0.42 WET	
				>0.55 WET 2CM	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.		NOT AFFECTED
	BREAKING STRENGTH GAUGED PORCELAIN	ASTM C1505	≥175 lbf	≥200 lbf	
	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.		RESISTANT
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

V3
MODERATE VARIATION

