

FIORANO USA
SANSTONE

STONESOURCE

SANDSTONE




STONESOURCE


COLOR



SIZES




24"x24"
1104003




12"x24"
1104009


MOSAICS



11.77"x11.77"
(1"x4") Mosaic
1104018



11.7"x11.7"
(1"x3") Mosaic
1104015




11.65"x11.65"
(64 DOT) Mosaic
1104012

WHITE SAND


COLOR



SIZES




24"x24"
1104004




12"x24"
1104010


MOSAICS



11.77"x11.77"
(1"x4") Mosaic
1104019



11.7"x11.7"
(1"x3") Mosaic
1104016




11.65"x11.65"
(64 DOT) Mosaic
1104013


SUNSET

Colors shown may vary from actual product.
Final selection should be made from actual product
samples.

COLOR

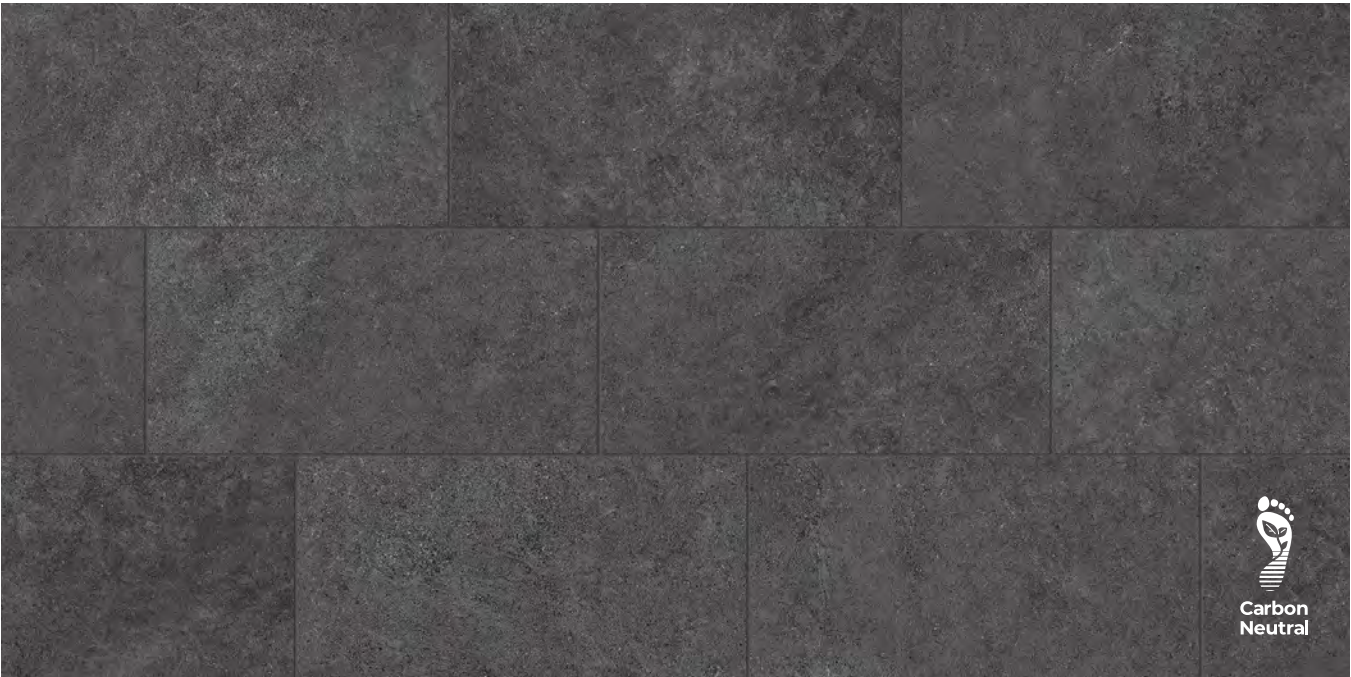

SIZES




24"x24"
1104005




12"x24"
1104011


MOSAICS



11.77"x11.77"
(1"x4") Mosaic
1104020



11.7"x11.7"
(1"x3") Mosaic
1104017



11.65"x11.65"
(64 DOT) Mosaic
1104014

NIGHT SKY



_12"x24"_Night Sky_Matte





Wall: _11.77"x11.77" (1x4) Mosaic_12"x24" _Sunset_Matte

Floor: _24"x24" _Sunset_Matte



Wall: _11.7"x11.7" (1x3) Mosaic_White Sand_Matte
Floor: _24"x24"_White Sand_Matte



Wall: _11.7"x11.7" (1x3) Mosaic_White Sand_Matte
Floor: _24"x24"_White Sand_Matte





Wall: A_11.77"x11.77" [1x4] Mosaic_Sunset_Matte
Floor: _24"x24"_Sunset_Matte



Wall: _11.77"x11.77" [1x4] Mosaic_Sunset_Matte
Floor: _24"x24"_Sunset_Matte



Wall / Backsplash: _11.65"x11.65" (64 DOT) Mosaic_Night Sky_Matte

Floor: _24"x24"_Night Sky_Matte 16

Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%	
		ASTM C373	0.5%	Meeting the water absorption criteria of the American national standard PTCA	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42 WET	≥0.42 WET	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recordedpost cleaning.	NOT AFFECTED	
	BREAKING STRENGTH	ASTM C648	≥250 lbf	8mm ≥300 lbf 10mm ≥400 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

- Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

Packaging Specifications

SIZES	THICKNESS (MM)	PIECES PER BOX	UOM PER BOX	WEIGHT PER BOX	BOXES PER PALLET	UOM PER PALLET	WEIGHT PER PALLET*
FIELD TILES							
12"x24"	NOMINAL	8 mm	8	16 SF	54.4 LBS	48	768 SF
24"x24"	NOMINAL	8 mm	4	16 SF	54.4 LBS	36	576 SF
MOSAICS							
11.77"x11.77" {1"x4"} Mosaic**	NOMINAL	8 mm	10	10 PCS	33 LBS	45	450 PCS
11.7"x11.7" {1"x3"} Mosaic**	NOMINAL	8 mm	10	10 PCS	33 LBS	45	450 PCS
11.65"x11.65" {64 DOT} Mosaic**	NOMINAL	8 mm	10	10 PCS	33 LBS	45	450 PCS

* WEIGHT PER PALLET DOES NOT INCLUDE PALLET WEIGHT ITSELF.
ALL OTHER SIZES WILL BE PACKAGED AS ORDERED.
PLEASE CONTACT MILESTONE CUSTOMER SERVICE AT 1-877-356-7461 FOR PACKAGING INFORMATION.

** MOSAIC SIZES ARE APPROXIMATE AND DO NOT REFLECT ACTUAL COVERAGE AREA.
ACTUAL MOSAIC COVERAGE AREA IS AS FOLLOWS:
11.77"x11.77" {1"x4"} MOSAIC = 0.968 SF/PC
11.7"x11.7" {1"x3"} MOSAIC = 0.947 SF/PC
11.65"x11.65" {64 DOT} MOSAIC = 0.968 SF/PC

MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16") IF STAGGERED TILE PLACEMENT, WE RECOMMEND USING A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").



STONESOURCE