





FIORANO USA
MARQUIS

STONESOURCE



CLASSIC IN NATURE. MODERN IN PRESENTATION.

FIORANO USA MARQUIS

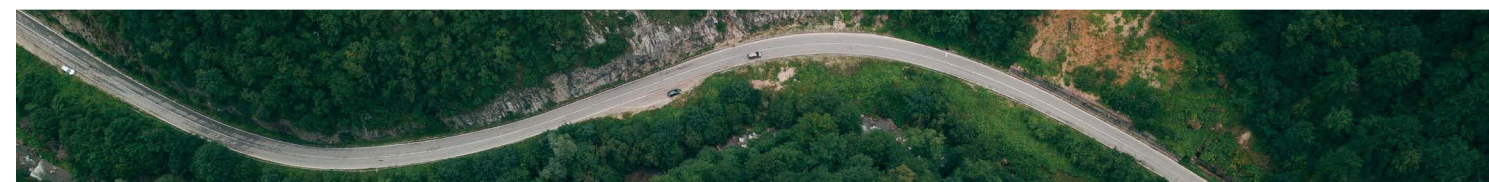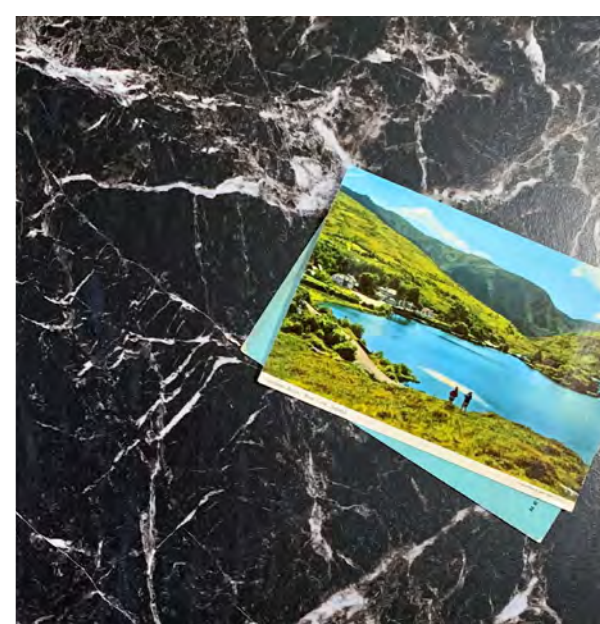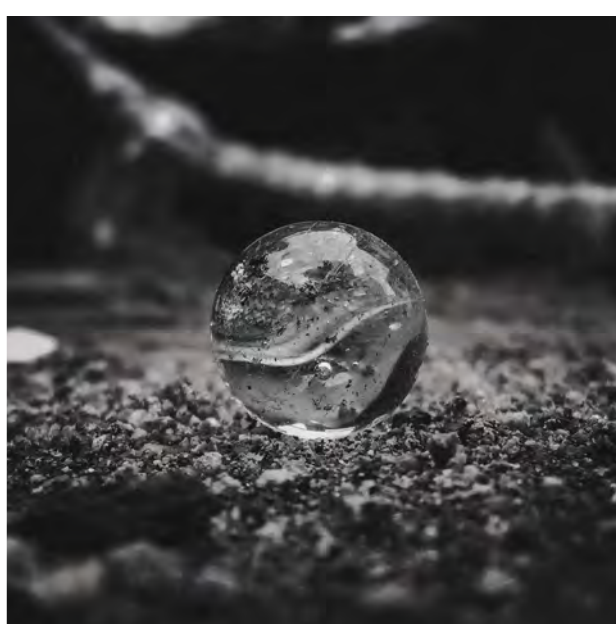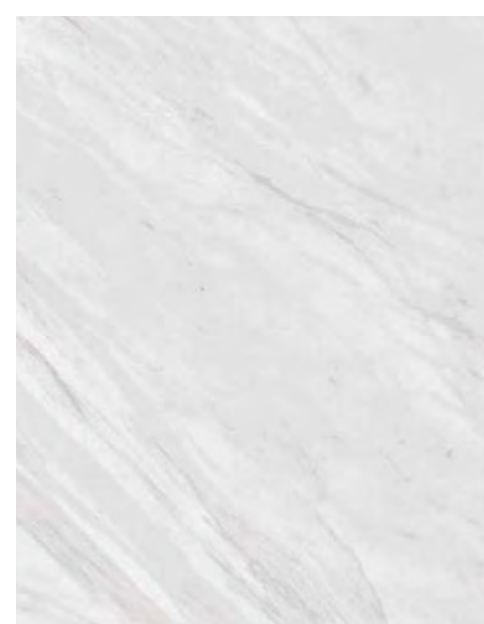

FIVE
COLOR WAYS



**VOLAKAS
SILK**



**CARRARA
WHITE**



**ONICIATA
IVORY**



**ONICIATA
GREY**



**MARMO
NERO**

FIORANO USA MARQUIS





FIORANO USA MARQUIS

INSTALLATIONS

07 VOLAKAS SILK

13 CARRARA WHITE

16 ONICIATA IVORY

22 ONICIATA GREY

27 MARMO NERO

The background of the entire page is a repeating pattern of rectangular tiles. Each tile features a marbled design with swirling veins of light grey, off-white, and subtle hints of pink and beige. The tiles are separated by thin, light grey grout lines.

VOLAKAS SILK

FIORANO USA MARQUIS



FLOOR
VOLAKAS SILK Polished 24"x24" Rectified

WALL
VOLAKAS SILK Polished 8"x24" Rectified



VOLAKAS SILK Polished 24"x24" Rectified



FLOOR
VOLAKAS SILK Matte 12"x24" Pressed

WALL
VOLAKAS SILK Matte 12"x24" Pressed
VOLAKAS SILK Hexagon Mosaic Matte 9"x11"



VOLAKAS SILK Matte 12"x24" Pressed
VOLAKAS SILK Hexagon Mosaic Matte 9"x11"



VOLAKAS SILK Matte 12"x24" Pressed
VOLAKAS SILK Hexagon Mosaic Matte 9"x11"



CARRARA WHITE

FIORANO USA MARQUIS



FLOOR
CARRARA WHITE Matte 12"x24" Pressed

WALL
MARMO NERO Hexagon Mosaic Matte 9"x11"



FLOOR
CARRARA WHITE Matte 12"x24" Pressed

WALL
MARMO NERO Hexagon Mosaic Matte 9"x11"



ONICIATA IVORY

FIORANO USA MARQUIS



FLOOR
ONICIATA IVORY Matte 12"x24" Pressed

FIREPLACE
ONICIATA IVORY Mosaic Matte 12"x12"



FLOOR
ONICIATA IVORY Matte 12"x24" Pressed

FIREPLACE
ONICIATA IVORY Mosaic Matte 12"x12"



FLOOR
ONICIATA IVORY Matte 24"x48" Rectified

WALL
ONICIATA IVORY Polished 8"x24" Rectified



FLOOR
ONICIATA IVORY Matte 24"x48" Rectified

WALL
ONICIATA IVORY Polished 8"x24" Rectified



FLOOR
ONICIATA IVORY Matte 24"x48" Rectified



ONICIATA GREY

FIORANO USA MARQUIS



FLOOR
ONICIATA GREY Matte 12"x24" Pressed

WALL
ONICIATA GREY Polished 8"x24" Rectified

FLOOR
ONICIATA GREY Matte 12"x24" Pressed

BACKSPLASH
ONICIATA GREY Mosaic Matte 12"x12"



FIREPLACE
ONICIATA GREY Polished 12"x24" Rectified

FLOOR
ONICIATA GREY Polished 24"x48" Rectified





FLOOR
ONICIATA GREY Polished 24"x48" Rectified

FIREPLACE
ONICIATA GREY Polished 12"x24" Rectified



MARMO NERO

FIORANO USA MARQUIS



MARMO NERO Polished 24"x48" Rectified



FLOOR
MARMO NERO Matte 24"x24" Pressed

WALL
CARRARA WHITE Polished 8"x24" Rectified
CARRARA WHITE Hexagon Mosaic Polished 9"x11"

PRODUCT INFORMATION

VOLAKAS SILK




24"x48" Rectified
Thickness: **10mm**
Finishes: **Matte/Polished**



24"x24" Pressed
Thickness: **8mm**
Finishes: **Matte**



24"x24" Rectified
Thickness: **8mm**
Finishes: **Polished**

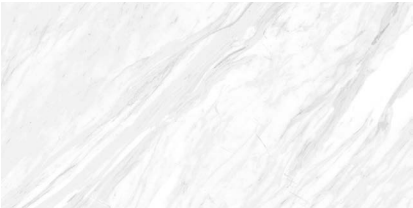

12"x24" Pressed
Thickness: **8mm**
Finishes: **Matte**



12"x24" Rectified
Thickness: **8mm**
Finishes: **Polished**



8"x24" Rectified
Thickness: **8mm**
Finishes: **Polished**

PRODUCT INFORMATION

CARRARA WHITE



24"x48" Rectified
Thickness: **10mm**
Finishes: **Matte/Polished**



24"x24" Pressed
Thickness: **8mm**
Finishes: **Matte**



24"x24" Rectified
Thickness: **8mm**
Finishes: **Polished**



12"x24" Pressed
Thickness: **8mm**
Finishes: **Matte**



12"x24" Rectified
Thickness: **8mm**
Finishes: **Polished**



8"x24" Rectified
Thickness: **8mm**
Finishes: **Polished**

FIORANO USA MARQUIS

GLAZED FINE PORCELAIN TILE

PRODUCT INFORMATION

ONICIATA IVORY



24"x48" Rectified
Thickness: **10mm**
Finishes: **Matte/Polished**



24"x24" Pressed
Thickness: **8mm**
Finishes: **Matte**



24"x24" Rectified
Thickness: **8mm**
Finishes: **Polished**



12"x24" Pressed
Thickness: **8mm**
Finishes: **Matte**



12"x24" Rectified
Thickness: **8mm**
Finishes: **Polished**



8"x24" Rectified
Thickness: **8mm**
Finishes: **Polished**

V3 SHADE VARIATION

PRODUCT INFORMATION

ONICIATA GREY



24"x48" Rectified
Thickness: **10mm**
Finishes: **Matte/Polished**



24"x24" Pressed
Thickness: **8mm**
Finishes: **Matte**



24"x24" Rectified
Thickness: **8mm**
Finishes: **Polished**



12"x24" Pressed
Thickness: **8mm**
Finishes: **Matte**



12"x24" Rectified
Thickness: **8mm**
Finishes: **Polished**



8"x24" Rectified
Thickness: **8mm**
Finishes: **Polished**

PRODUCT INFORMATION

MARMO NERO




24"x48" Rectified
Thickness: 10mm
Finishes: **Matte/Polished**




24"x24" Pressed
Thickness: 8mm
Finishes: **Matte**




24"x24" Rectified
Thickness: 8mm
Finishes: **Polished**

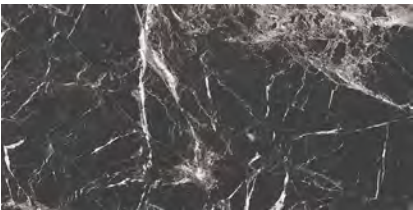

12"x24" Pressed
Thickness: 8mm
Finishes: **Matte**

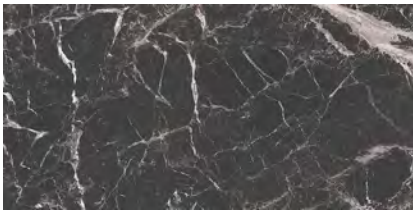

12"x24" Rectified
Thickness: 8mm
Finishes: **Polished**

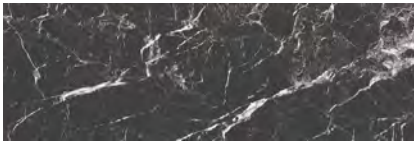


8"x24" Rectified
Thickness: 8mm
Finishes: **Polished**

FIORANO USA MARQUIS
GLAZED FINE PORCELAIN TILE

DECORS

Mosaic 12”x12” (2”x2” Pcs)

Thickness: **8mm** - Finish: **Matte/Polished**



VOLAKAS SILK




CARRARA WHITE



ONICIATA IVORY




ONICIATA GREY



MARMO NERO

Hexagon Mosaic 9”x11”

Thickness: **8mm** - Finish: **Matte/Polished**



VOLAKAS SILK




CARRARA WHITE



ONICIATA IVORY




ONICIATA GREY



MARMO NERO

SPECIAL PIECES

	<div></div> <div>Bullnose 3"x12"</div>
THICKNESS	8mm
VOLAKAS SILK	MAT PL
CARRARA WHITE	MAT PL
ONICIATA IVORY	MAT PL
ONICIATA GREY	MAT PL
MARMO NERO	MAT PL
Finishes:	Matte: MAT Polished: PL

FIORANO USA MARQUIS

GLAZED FINE PORCELAIN TILE

PACKAGING

SIZES	METRIC (CM)	THICKNESS (MM)	PIECES PER BOX	UOM PER BOX	WEIGHT PER BOX	BOXES PER PALLET	UOM PER PALLET	WEIGHT PER PALLET*
24"x48" Rectified	60x120	10	2	16 SF	76.8 LBS	32	512 SF	2,457.6 LBS
24"x24" Rectified/Pressed	60x60	8	4	16 SF	52.8 LBS	36	576 SF	1,900 LBS
12"x24" Rectified/Pressed	30x60	8	8	16 SF	52.8 LBS	48	768 SF	2,534 LBS
8"x24" Rectified	20x60	8	15	19.05 SF	62.87 LBS	36	685.8 SF	2,263 LBS
12"x12" Mosaic (2"x2" - 36 pcs)	30x30	8	10	10 PCS	33	45	450 PCS	1,485
9"x11" Hexagon Mosaic (12 pcs)	23x28	8	10	10 PCS	33	45	450 PCS	1,485
3"x12" Bullnose	7.5x30	8	15	15 PCS	14.55	168	2,520 PCS	2,444.4

*WEIGHT PER PALLET DOES NOT INCLUDE THE PALLET WEIGHT ITSELF.
ALL OTHER SIZES WILL BE PACKAGED AS ORDERED.

MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16") IF STAGGERED TILE PLACEMENT, IT IS RECOMMENDED TO USE A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").

TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS	TEST METHOD	INDUSTRY STANDARD	VALUES
WATER ABSORPTION	ASTM C373	$\leq 0.5\%$	$\leq 0.4\%$
CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
D.C.O.F. AcuTest	ANSI A326.3	$\geq 0.42\%$ WET	$\geq 0.42\%$ WET
STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
BREAKING STRENGTH	ASTM C648	≥ 250 lb/ft ²	8mm ≥ 300 lb/ft ² 10mm ≥ 400 lb/ft ²
FREEZE RESISTANCE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
WARPAGE EDGE	ASTM C485	Warpage $\pm 0.4\%$ or ± 0.05 in	$\geq \pm 0.4\%$
WARPAGE DIAGONAL	ASTM C485	Warpage $\pm 0.4\%$ or ± 0.07 in	$\geq \pm 0.4\%$
WARPAGE EDGE	ASTM C485	Warpage $\pm 0.5\%$ or ± 0.07 in	$\geq \pm 0.5\%$
WARPAGE DIAGONAL	ASTM C485	Warpage $\pm 0.5\%$ or ± 0.07 in	$\geq \pm 0.5\%$
WEDGEING	ASTM C502	$\pm 0.25\%$ or ± 0.03 in	$\geq \pm 0.25\%$
THICKNESS	ASTM C499	Range: ± 0.04 in	≤ 0.04 in

DUE TO THE INHERENT NATURE OF FIRED PORCELAIN TILE, IT IS IMPORTANT TO NOTE THAT THE COEFFICIENT OF FRICTION MAY VARY WITHIN AND BETWEEN PRODUCT RUNS.

